

The logo for ARNO WERKZEUGE, featuring the brand name in white on a red background with a registered trademark symbol, and the word 'WERKZEUGE' in black on a white background below it.

ARNO[®]
WERKZEUGE

DP VIKING AS 2024.1

HM Pinnefreser

HM Pinnefreser

Design / Type

AF - For stål og støpejern, Allround

AFA - For Alu-Kompositt-Kobber-Messing-Plast

AFD - For grafitt-Kompositt

AFE - For høyhastighets maskinering av eksotiske materialer (Titan, Inconel) og Syrefast.

AFG - For legert stål og herdet stål opp til 50 HRC

AFH - For herdet stål opp til 70 HRC og høyhastighets maskinering

AFJ - For syrefast og eksotiske materialer

AFR - For stål, Verktøy stål, Støpejern forhåndsherdet stål opp til 40 HRC

AFV - Differensialdelte skjær (35°–38°)












AFX - for forhåndsherdet stål opp til 55 HRC, Stål og støpejern








Beskrivelse	Ant. Skjær	Type	Design	Spiral vinkel	Bilde	Side
AF - For stål og støpejern, Allround						
AF50526-...	2	Pinnefres Allround	mini	30°		16
AF52021-...	2	Fullradiefres Allround	mini	30°		18
AF60125-...	2	Pinnefres Allround	Kort	30°		20
AF50120-...R...	2	Pinnefres Allround	Kort med Hjørneradie	30°		21
AF50121-... / AF60121-...	2	Pinnefres Allround	Lang	30°		23
AF50121-...R...	2	Pinnefres Allround	Lang, med Hjørneradie	30°		25
AF50122-...	2	Pinnefres Allround	Ekstra lang	30°		26
AF60320-...	2	Fullradiefres Allround	Kort	30°		27
AF50321-...	2	Fullradiefres Allround	Lang	30°		28
AF60321-...	2	Fullradiefres Allround	Lang	30°		29
AF50322-...	2	Fullradiefres Allround	Ekstra Lang	30°		30



Beskrivelse	Ant. Skjær	Type	Design	Spiral vinkel	Bilde	Side
AF50135-... / AF60135-...	3	Pinnefres Allround	Ekstra kort	30°		31
AF61330-...	3	Pinnefres Allround	Kort	30°		33
AF60131-...	3	Pinnefres Allround	Lang	30°		34
AF60231-...	3	Pinnefres Allround	Lang	45°		35
AF50140-...	4	Pinnefres Allround	Lang	30°		36
AF50140-...R...	4	Pinnefres Allround	Kort med Hjørneradie	30°		37
AF60140-...X...	4	Pinnefres Allround	Kort	30°		39
AF50141-... / AF60141-...	4	Pinnefres Allround	Lang	30°		40
AF50141-...R...	4	Pinnfres Allround	Lang med Hjørneradie	30°		42
AF50142-...X... / AF60142-...X...	4	Pinnfres Allround	Ekstra Lang	30°		43
AF50340-...	4	Fullradiefres Allround	Kort	30°		45



Beskrivelse	Ant. Skjær	Type	Design	Spiral vinkel	bilde	side
AF502.0-...	4 - 6	Pinnefres Allround	Kort	45°		46
AF50261-...	6	Pinnefres Allround	Lang	45°		47
AF614.1-...	3 - 5	Skrubbfres Allround	Lang	30°		48
AFA - for aluminium, plast og ikke jern-metaller						
AFA50116-...	1	Pinnefres ALu-Plast	std lengde	30°		57
AFA50220-...	2	Pinnefres ALu-Plast	Kort	45°		58
AFA51820-...	2	Fullradiefres ALu-Plast	Kort	50°		59
AFA51521-...	2	Pinnfres ALu-Plast	Lang	45°		60
AFA50720-...R...	2	Pinnefres ALu-Plast	Lang med hjørnerdie	30°		61
AFA51522-...	2	Pinnefres ALu-Plast	Ekstra lang	45°		62
AFA50222-...	2	Pinnefres ALu-Plast	Ekstra lang	45°		63



Description	Flutes	Type	Design	Helix angle	Picture	Page
AFA51836-...	3	Pinnefres ALu-Plast	Std lengde	45°		65
AFA52336-...	3	Pinnefres ALu-Plast	Std lengde, forlenget nakke	45°		66
AFA51531-...	3	Pinnefres ALu-Plast	Lang	45°		67
AFA50231-...R...	3	Pinnefres ALu-Plast	Lang, med hjørneardie	45°		68
AFA51532-...	3	Pinnefres ALu-Plast	Ekstra lang	45°		69
AFA50232-...	3	Pinnefres ALu-Plast	Ekstra lang	45°		70
AFA51831-...	3	Fullradiefres ALu-Plast	Kort	40°		74
AFA61431-...	3	Skrubbfres ALu-Plast	Lang	30°		75
AFA51431-...	3	Skrubbfres ALu-Plast	Lang	30°		76
AFA52131-...	3	Skrubbfres ALu-Plast	Lang	42°		77



Description	Flutes	Type	Design	Helix angle	Picture	Page
AFA51931-...	3	Skrubbfres ALu-Plast	Lang	45°		78
AFA52331-...	3	Skrubbfres ALu-Plast	Lang, redusert nakke	45°		79
AFD - for grafitt og ikke jern-metaller						
AFD50724-...R...	2	Pinnefres Grafitt	Mini, med hjørneradie	30°		89
AFD50121-...	2	Pinnefres Grafitt	Lang	30°		91
AFD51824-...	2	Fullradiefres Grafitt	mini	30°		92
AFD54030-...R...	2	Pinnefres Grafitt	mini	30°		94
AFE - for eksotiske materialer (Titan, Inconel) og Syrefast						
AFE51840-...R...	4	Pinnefres Eksotisk-Syrefast	Med hjørneradie	Multi		105
AFE51850-...	5	Pinnefres Eksotisk-Syrefast	Kort	Multi		107
AFE51850-...R...	5	Pinnefres Eksotisk-Syrefast	Med hjørneradie	Multi		108
AFE51851-...	5	Pinnefres Eksotisk-Syrefast	Lang	Multi		109














Description	Flutes	Type	Design	Helix angle	Picture	Page
AFE51851-...R...	5	Pinnefres Eksotisk-Syrefast	Med Hjørneradie	Multi		110
AFE52451-...R...	5	Skrubbfres Eksotisk-Syrefast	Med Hjørneradie	40°		112
AFG - for stål og herdbart-herdet stål opp til 50 HRC						
AFG50120-...	2	Pinnefres Stål-Herdbart stål	Kort	30°		121
AFG50121-...	2	Pinnefres Stål-Herdbart stål	Lang	30°		122
AFG50321-...	2	Fullradiefres stål-Herdbart stål	Lang	30°		123
AFG50140-...	4	Pinnefres Stål-Herdbart stål	Kort	30°		124
AFG60140-...	4	Pinnefres Stål-Herdbart stål	Kort	30°		125
AFG50141-...	4	Pinnefres Stål-Herdbart stål	Lang	30°		126
AFG502.0-...	4 - 8	Pinnefres Stål-Herdbart stål	Lang	45°		127
AFG50262-...	6	Pinnefres Stål-Herdbart stål	Ekstra lang	45°		128



Description	Flutes	Type	Design	Helix angle	Picture	Page
AFG60262-...	6	Pinnefres Stål-Herdbart stål	Ekstra lang	45°		129
AFG606.1-...	3 - 5	Skrubbfres Stål-Herdbart stål	Lang	20°		130
AFH - for herdet stål opp til 70 HRC og høyhastighetsspindel						
AFH50120-...R...	2	Pinnefres Herdet stål 70HRC	mini	30°		141
AFH50526-...	2	Pinnefres Herdet stål 70HRC	mini (spor)	30°		142
AFH50920-...R...	2	Pinnefres Herdet stål 70HRC	mini (spor)	30°		144
AFH50320-...	2	Fullradiefres Herdet stål 70HRC	mini	30°		145
AFH52020-...	2	Fullradiefres Herdet stål 70HRC	mini (spor)	30°		146
AFH52021-...	2	Fullradiefres Herdet stål 70HRC	mini (spor)	30°		147
AFH50125-...	2	Pinnefres Herdet stål 70HRC		30°		149
AFH50725-...R...	2	Pinnefres Herdet stål 70HRC	Med Hjørneradie	30°		151




Description	Flutes	Type	Design	Helix angle	Picture	Page
AFH50926-...R...	2	Pinnfres Herdet stål 70HRC	Med Hjørneradie	30°		153
AFH51625-...	2	Fullradiefres Herdet stål 70HRC		30°		156
AFH51626-...	2	Fullradiefres Herdet stål 70HRC		30°		158
AFH51635-...	3	Fullradiefres Herdet stål 70HRC		30°		160
AFH50140-...	4	Pinnefres Herdet stål 70HRC		30°		161
AFH50142-...R...	4	Pinnefres Herdet stål 70HRC	Med hjørneradie	30°		162
AFH50146-...R...	4	Pinnefres Herdet stål 70HRC	Med hjørneradie	30°		163
AFH50745-...R...	4	Pinnefres Herdet stål 70HRC	Med hjørneradie	30°		165
AFH50341-...	4	Fullradiefres Herdet stål 70HRC		30°		167
AFH50865-...R...	6	Pinnefres Herdet stål 70HRC	Med hjørneradie	45°		168
AFH508.1-...	6 - 8	Pinnefres Herdet stål 70HRC	Lang	45°		169



Description	Flutes	Type	Design	Helix angle	Picture	Page
AFH508.2-...	6 - 8	Pinnefres Herdet stål 70HRC	Ekstra lang	45°		170
AFH50746-...R...	4	Høymatningsfres Herdet stål 70HRC	Kort, med hjørneradie	90°		171
AFH50741-...R...	4	Høymatningsfres Herdet stål 70HRC	Kort, med hjørneradie	90°		172
AFJ - for Syrefaste og eksotiske materialer						
AFJ612.1-...	3 - 4	Pinnefres Syrefast-Eksotisk	Lang	50°		184
AFJ602.0-...	4 - 8	Pinnefres Syrefast-Eksotisk	Kort	45°		185
AFJ619.1-...	3 - 6	Skrubbfres Syrefast-Eksotisk	Lang	45°		186
AFR - for stål, verktøystål, støpejern og forherdet stål						
AFR619.0-...	4 - 5	Skrubbfres Verktøystål-seigjern	Kort	43 - 46°		194
AFR619.1-...	4 - 5	Skrubbfres Verktøystål-seigjern	Ekstra lang	43 - 46°		195
AFR619.2-...	4 - 5	Skrubbfres Verktøystål-seigjern	Lang	43 - 46°		196



Description	Flutes	Type	Design	Helix angle	Picture	Page
AFV - med differensialdelte skjær (26° - 30° / 35° - 38°)						
AFV61840-... (TiAIN)	4	Pinnefres Høymating-Differensialdelte Z	Kort	35° - 38°		202
AFV61840-... (S100)	4	Pinnefres Høymating-Differensialdelte Z	Kort	35° - 38°		203
AFV61840-...R... (S100)	4	Pinnefres Høymating-Differensialdelte Z	Kort, hjørneradie	35° - 38°		204
AFV62342-... (S100)	4	Pinnefres Høymating-Differensialdelte Z	Kort	35 - 38°		205
AFV62342-...R... (S100)	4	Pinnefres Høymating-Differensialdelte Z	Kort	35 - 38°		207
AFV61841-... (S100)	4	Pinnefres Høymating-Differensialdelte Z	Lang	35° - 38°		209
AFV61841-... (TiAIN)	4	Pinnefres Høymating-Differensialdelte Z	Lang	35 - 38°		210
AFV61841-...R... (S100)	4	Pinnefres Høymating-Differensialdelte Z	Lang, Hjørneradie	35 - 38°		211
AFV61841-...R... (TiAIN)	4	Pinnefres Høymating-Differensialdelte Z	Lang, Hjørneradie	35° - 38°		212
AFV60341-... (TiAIN)	4	Fullradiefres Høymating-Differensialdelte Z	Lang	35° - 38°		213



Description	Flutes	Type	Design	Helix angle	Picture	Page
AFV61646-... (S100)	4	Fullradiefres Høymating-Differensialdelte Z	Lang	35° - 38°		214
AFV61851-... (TiAlN)	5	Pinnefres Høymating-Differensialdelte Z	Lang	35° - 38°		215
AFV60266-... (S100)	5	Pinnefres Høymating-Differensialdelte Z	Lang	45°		216
AFV60262-... (S100)	6	Pinnefres Høymating-Differensialdelte Z	Ekstra lang	45°		217
AFV60861-...R... (S100)	6	Pinnefres Høymating-Differensialdelte Z	Lang, Hjørneradie	45°		218
AFV60862-...R... (S100)	6	Pinnefres Høymating-Differensialdelte Z	Ekstra lang, Hjørneradie	45°		219
AFX - for forherdet stål opp til 55 HRC, stål og støpejern						
AFX50124-...R...	2	Pinnfres Herdet opp til 55HRC	mini hjørnearadie	30°		228
AFX50120-...	2	Pinnefres Herdet opp til 55HRC	Kort	30°		232
AFX50121-...	2	Pinnefres Herdet opp til 55HRC	Lang	30°		234
AFX50121-...R...	2	Pinnefres Herdet opp til 55HRC	Lang, Hjørneradie	30°		236



Description	Flutes	Type	Design	Helix angle	Picture	Page
AFX50122-...	2	Pinnefres Herdet opp til 55HRC	Ekstra lang	30°		238
AFX50321-...	2	Fullradiefres Herdet opp til 55HRC	Lang	30°		241
AFX52021-...	2	Fullradiefres Herdet opp til 55HRC	Lang, Spor	30°		243
AFX50140-...	4	Pinnfres Herdet opp til 55HRC	Kort	26 - 30°		245
AFX50041-...R...	4	Pinnefres Herdet opp til 55HRC	Lang, Hjørneradie	30 - 38°		246
AFX50741-...R...	4	Pinnefres Herdet opp til 55HRC	Lang, Hjørneradie	30°		249
AFX50042-...	4	Pinnefres Herdet opp til 55HRC	Ekstra lang	35 - 38°		251
AFX50141-...	4	Pinnefres Herdet opp til 55HRC	Lang	30°		252
AFX50142-...	4	Pinnefres Herdet opp til 55HRC	Ekstra lang	30°		254
AFX50260-...	6	pinnefres Herdet opp til 55HRC	Kort	45°		256

GREAT PERFORMANCE.

For general milling of steel, stainless steel
and cast materials.







AF50526-...

2 flutes, mini design

AF

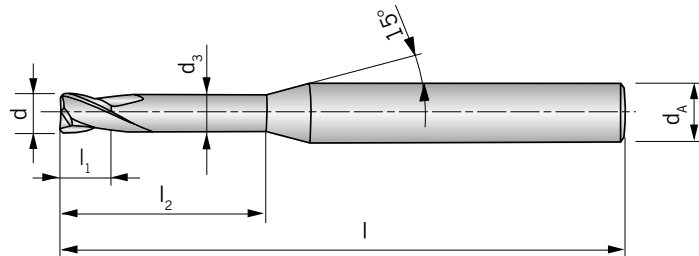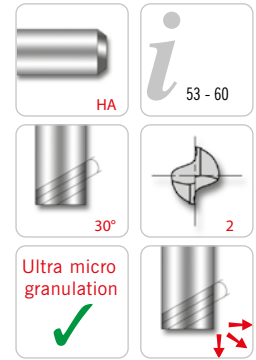

Shank DIN 6535HA	d -0,03	d _A h6	d ₃	l ₁	l ₂	l
AF50526-004A	0.4	4	0.37	0.70	2	50
AF50526-004B	0.4	4	0.37	0.70	4	50
AF50526-005A	0.5	4	0.45	0.75	2	50
AF50526-005B	0.5	4	0.45	0.75	4	50
AF50526-005C	0.5	4	0.45	0.75	6	50
AF50526-006A	0.6	4	0.55	0.90	2	50
AF50526-006B	0.6	4	0.55	0.90	4	50
AF50526-006C	0.6	4	0.55	0.90	6	50
AF50526-007A	0.7	4	0.65	1.10	4	50
AF50526-007B	0.7	4	0.65	1.10	6	50
AF50526-008A	0.8	4	0.75	1.20	4	50
AF50526-008B	0.8	4	0.75	1.20	6	50
AF50526-008C	0.8	4	0.75	1.20	8	50
AF50526-009A	0.9	4	0.85	1.40	6	50
AF50526-009B	0.9	4	0.85	1.40	8	50
AF50526-009C	0.9	4	0.85	1.40	10	50
AF50526-010A	1.0	4	0.95	1.50	6	50
AF50526-010B	1.0	4	0.95	1.50	8	50
AF50526-010C	1.0	4	0.95	1.50	10	50
AF50526-010D	1.0	4	0.95	1.50	12	50
AF50526-012A	1.2	4	1.15	1.80	6	50
AF50526-012B	1.2	4	1.15	1.80	8	50
AF50526-012C	1.2	4	1.15	1.80	10	50
AF50526-012D	1.2	4	1.15	1.80	12	50
AF50526-015A	1.5	4	1.45	2.30	6	50
AF50526-015B	1.5	4	1.45	2.30	8	50
AF50526-015C	1.5	4	1.45	2.30	10	50
AF50526-015D	1.5	4	1.45	2.30	12	50
AF50526-015E	1.5	4	1.45	2.30	14	50
AF50526-015F	1.5	4	1.45	2.30	16	50
AF50526-015G	1.5	4	1.45	2.30	18	50
AF50526-015H	1.5	4	1.45	2.30	20	50
AF50526-020A	2.0	4	1.95	3.00	6	50
AF50526-020B	2.0	4	1.95	3.00	8	50
AF50526-020C	2.0	4	1.95	3.00	10	50
AF50526-020D	2.0	4	1.95	3.00	12	50



Shank DIN 6535HA	d -0,03	d _A h6	d ₃	l ₁	l ₂	l	PG 24 / Price in £ HC
							TAIN
AF50526-020E	2.0	4	1.95	3.00	14	50	19.41
AF50526-020F	2.0	4	1.95	3.00	16	50	20.93
AF50526-020G	2.0	4	1.95	3.00	18	50	20.93
AF50526-020H	2.0	4	1.95	3.00	20	50	20.93
AF50526-025A	2.5	4	2.40	3.70	8	50	19.41
AF50526-025B	2.5	4	2.40	3.70	12	50	19.41
AF50526-025C	2.5	4	2.40	3.70	16	50	20.93
AF50526-025D	2.5	4	2.40	3.70	20	50	20.93
AF50526-030A	3.0	6	2.85	4.50	8	50	28.38
AF50526-030B	3.0	6	2.85	4.50	12	50	28.38
AF50526-030C	3.0	6	2.85	4.50	16	60	29.86
AF50526-030D	3.0	6	2.85	4.50	20	60	29.86
AF50526-030E	3.0	6	2.85	4.50	25	75	29.86
AF50526-040A	4.0	6	3.85	6.00	12	50	28.38
AF50526-040B	4.0	6	3.85	6.00	16	60	29.86
AF50526-040C	4.0	6	3.85	6.00	20	75	29.86
AF50526-040D	4.0	6	3.85	6.00	25	75	29.86
AF50526-040E	4.0	6	3.85	6.00	30	75	32.85
AF50526-040F	4.0	6	3.85	6.00	35	75	32.85

HC = Carbide coated

P	●
M	●
K	●
N	
S	
H	



- Main application
- Secondary application



AF52021-...

2 flutes, mini design

AF

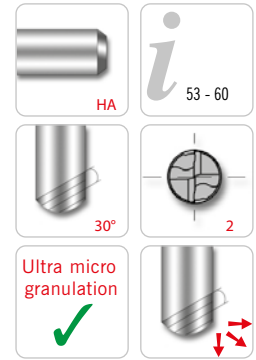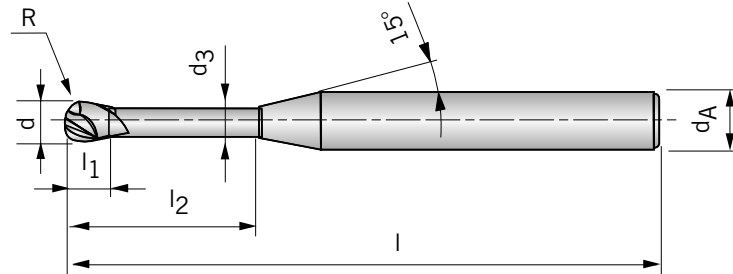

Shank DIN 6535HA	d -0,03	d _A h6	d ₃	l ₁	l ₂	l	R ± 0,02	PG 24 / Price in £ HC
								TAIN
AF52021-004A	0.4	4	0.37	0.70	2	50	0.20	40.32
AF52021-005A	0.5	4	0.45	0.75	2	50	0.25	34.36
AF52021-005B	0.5	4	0.45	0.75	4	50	0.25	34.36
AF52021-005C	0.5	4	0.45	0.75	6	50	0.25	35.84
AF52021-006A	0.6	4	0.55	0.90	2	50	0.30	34.36
AF52021-006B	0.6	4	0.55	0.90	4	50	0.30	34.36
AF52021-006C	0.6	4	0.55	0.90	6	50	0.30	34.36
AF52021-008A	0.8	4	0.75	1.20	4	50	0.40	28.38
AF52021-008B	0.8	4	0.75	1.20	6	50	0.40	28.38
AF52021-008C	0.8	4	0.75	1.20	8	50	0.40	28.38
AF52021-010A	1.0	4	0.95	1.50	6	50	0.50	28.38
AF52021-010B	1.0	4	0.95	1.50	8	50	0.50	28.38
AF52021-010C	1.0	4	0.95	1.50	10	50	0.50	28.38
AF52021-010D	1.0	4	0.95	1.50	12	50	0.50	29.86
AF52021-012A	1.2	4	1.15	1.80	8	50	0.60	28.38
AF52021-012B	1.2	4	1.15	1.80	12	50	0.60	29.86
AF52021-014A	1.4	4	1.35	2.10	16	50	0.70	29.86
AF52021-015A	1.5	4	1.45	2.30	6	50	0.75	28.38
AF52021-015B	1.5	4	1.45	2.30	8	50	0.75	28.38
AF52021-015C	1.5	4	1.45	2.30	10	50	0.75	28.38
AF52021-015D	1.5	4	1.45	2.30	12	50	0.75	29.86
AF52021-015E	1.5	4	1.45	2.30	16	50	0.75	29.86
AF52021-015F	1.5	4	1.45	2.30	20	50	0.75	29.86
AF52021-016A	1.6	4	1.55	2.40	8	50	0.80	28.38
AF52021-016B	1.6	4	1.55	2.40	12	50	0.80	29.86
AF52021-016C	1.6	4	1.55	2.40	16	50	0.80	29.86
AF52021-016D	1.6	4	1.55	2.40	20	50	0.80	29.86
AF52021-020A	2.0	4	1.95	3.00	8	50	1.00	25.39
AF52021-020B	2.0	4	1.95	3.00	10	50	1.00	25.39
AF52021-020C	2.0	4	1.95	3.00	12	50	1.00	25.39
AF52021-020D	2.0	4	1.95	3.00	14	50	1.00	26.90
AF52021-020E	2.0	4	1.95	3.00	16	50	1.00	26.90
AF52021-020F	2.0	4	1.95	3.00	20	50	1.00	28.38
AF52021-030A	3.0	6	2.85	4.50	10	50	1.50	28.38
AF52021-030B	3.0	6	2.85	4.50	12	50	1.50	28.38
AF52021-030C	3.0	6	2.85	4.50	16	60	1.50	31.35



Shank DIN 6535HA	d -0,03	d _A h6	d ₃	l ₁	l ₂	l	R ± 0,02	PG 24 / Price in £ HC
								TAIN
AF52021-030D	3.0	6	2.85	4.50	20	60	1.50	34.36
AF52021-030E	3.0	6	2.85	4.50	25	75	1.50	35.84
AF52021-040A	4.0	6	3.85	6.00	12	50	2.00	28.38
AF52021-040B	4.0	6	3.85	6.00	16	60	2.00	31.35
AF52021-040C	4.0	6	3.85	6.00	20	75	2.00	34.36
AF52021-040D	4.0	6	3.85	6.00	25	75	2.00	35.84
AF52021-040E	4.0	6	3.85	6.00	30	75	2.00	38.82

HC = Carbide coated

P	●
M	●
K	●
N	
S	
H	



- Main application
- Secondary application



AF60125-...

2 flutes, short design

AF

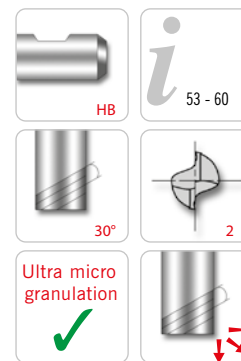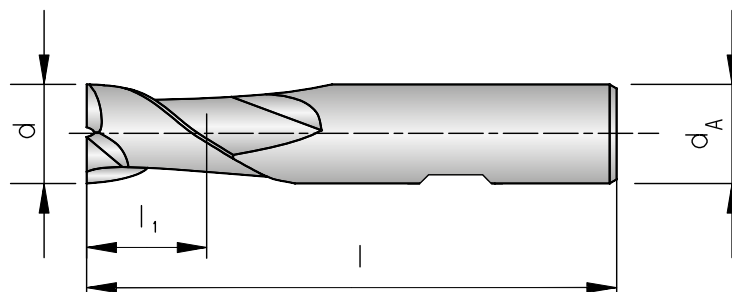

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AF60125-020	2.0	6	3	50	11.72
AF60125-030	3.0	6	4	50	11.72
AF60125-035	3.5	6	4	50	11.72
AF60125-040	4.0	6	5	54	11.72
AF60125-045	4.5	6	5	54	11.72
AF60125-050	5.0	6	6	54	11.72
AF60125-060	6.0	6	7	54	11.72
AF60125-070	7.0	8	8	58	14.47
AF60125-080	8.0	8	9	58	14.47
AF60125-090	9.0	10	10	66	22.04
AF60125-100	10.0	10	11	66	22.04
AF60125-120	12.0	12	12	73	30.66
AF60125-140	14.0	14	14	75	40.48
AF60125-160	16.0	16	16	82	54.27
AF60125-180	18.0	18	18	84	72.69
AF60125-200	20.0	20	20	92	90.44

HC = Carbide coated



P	●
M	●
K	●
N	
S	
H	

● Main application
○ Secondary application



AF50120-...R...

2 flutes, short design with corner radius

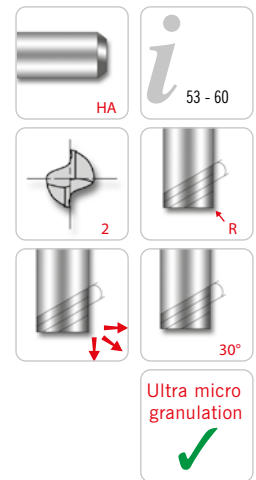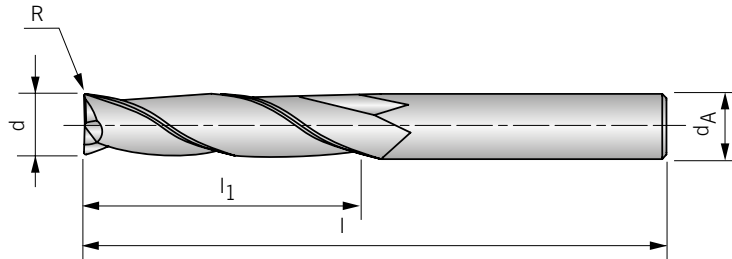

AF

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	R ± 0,03	PG 24 / Price in £ HC
						TiAlN
AF50120-020R0,2	2.0	4	4	50	0.2	14.65
AF50120-020R0,3	2.0	4	4	50	0.3	14.65
AF50120-020R0,5	2.0	4	4	50	0.5	14.65
AF50120-025R0,2	2.5	4	5	50	0.2	14.65
AF50120-025R0,3	2.5	4	5	50	0.3	14.65
AF50120-025R0,5	2.5	4	5	50	0.5	14.65
AF50120-030R0,2	3.0	4	6	50	0.2	15.68
AF50120-030R0,3	3.0	4	6	50	0.3	15.68
AF50120-030R0,5	3.0	4	6	50	0.5	15.68
AF50120-030R1,0	3.0	4	6	50	1.0	15.68
AF50120-040R0,2	4.0	4	8	50	0.2	17.49
AF50120-040R0,3	4.0	4	8	50	0.3	17.49
AF50120-040R0,5	4.0	4	8	50	0.5	17.49
AF50120-040R1,0	4.0	4	8	50	1.0	17.49
AF50120-050R0,2	5.0	6	10	50	0.2	19.27
AF50120-050R0,3	5.0	6	10	50	0.3	19.27
AF50120-050R0,5	5.0	6	10	50	0.5	19.27
AF50120-050R1,0	5.0	6	10	50	1.0	19.27
AF50120-060R0,2	6.0	6	12	50	0.2	19.27
AF50120-060R0,3	6.0	6	12	50	0.3	19.27
AF50120-060R0,5	6.0	6	12	50	0.5	19.27
AF50120-060R1,0	6.0	6	12	50	1.0	19.27
AF50120-080R0,5	8.0	8	16	60	0.5	23.88
AF50120-080R1,0	8.0	8	16	60	1.0	23.88
AF50120-080R1,5	8.0	8	16	60	1.5	23.88
AF50120-080R2,0	8.0	8	16	60	2.0	23.88
AF50120-080R2,5	8.0	8	16	60	2.5	23.88
AF50120-100R0,5	10.0	10	20	75	0.5	35.84
AF50120-100R1,0	10.0	10	20	75	1.0	35.84
AF50120-100R1,5	10.0	10	20	75	1.5	35.84
AF50120-100R2,0	10.0	10	20	75	2.0	35.84
AF50120-100R2,5	10.0	10	20	75	2.5	35.84
AF50120-120R0,5	12.0	12	24	75	0.5	50.79



Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	R ± 0,03	PG 24 / Price in £ HC
						TAIN
AF50120-120R1,0	12.0	12	24	75	1.0	50.79
AF50120-120R1,5	12.0	12	24	75	1.5	50.79
AF50120-120R2,0	12.0	12	24	75	2.0	50.79
AF50120-120R2,5	12.0	12	24	75	2.5	50.79

HC = Carbide coated


P	●
M	●
K	●
N	
S	
H	

● Main application
○ Secondary application



AF50121-... / AF60121-...

2 flutes, long design

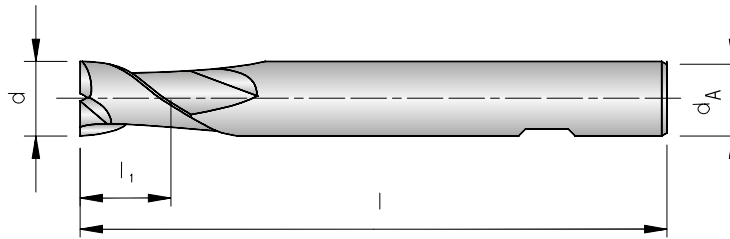

AF

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TiAIN
AF50121-020	2	3	6	38	10.21

HC = Carbide coated

P	●
M	●
K	●
N	
S	
H	

● Main application
○ Secondary application

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TiAIN
AF60121-028	2.80	6	7	57	14.65
AF60121-030	3.00	6	7	57	10.21
AF60121-035	3.50	6	7	57	13.02
AF60121-038	3.80	6	8	57	14.65
AF60121-040	4.00	6	8	57	10.21
AF60121-045	4.50	6	8	57	13.02
AF60121-048	4.80	6	10	57	13.02
AF60121-050	5.00	6	10	57	10.21
AF60121-055	5.50	6	10	57	14.65
AF60121-057	5.75	6	10	57	14.65
AF60121-060	6.00	6	10	57	10.21
AF60121-065	6.50	8	13	63	18.10
AF60121-067	6.75	8	13	63	18.10
AF60121-070	7.00	8	13	63	16.45
AF60121-075	7.50	8	16	63	18.10
AF60121-077	7.75	8	16	63	18.10
AF60121-080	8.00	8	16	63	12.87
AF60121-087	8.70	10	16	72	27.74



Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AF60121-090	9.00	10	16	72	24.03
AF60121-095	9.50	10	19	72	27.74
AF60121-097	9.70	10	19	72	27.74
AF60121-100	10.00	10	19	72	19.06
AF60121-105	10.50	12	22	83	39.10
AF60121-110	11.00	12	22	83	39.10
AF60121-117	11.70	12	22	83	39.10
AF60121-120	12.00	12	22	83	26.94
AF60121-137	13.70	14	22	83	51.52
AF60121-140	14.00	14	22	83	47.39
AF60121-150	15.00	16	26	92	63.89
AF60121-157	15.70	16	26	92	63.89
AF60121-160	16.00	16	26	92	43.67
AF60121-177	17.70	18	26	92	89.55
AF60121-180	18.00	18	26	92	82.15
AF60121-197	19.70	20	32	104	107.13
AF60121-200	20.00	20	32	104	74.60

HC = Carbide coated



P	●
M	●
K	●
N	
S	
H	

- Main application
- Secondary application



AF50121-...R...

2 flutes, long design with corner radius

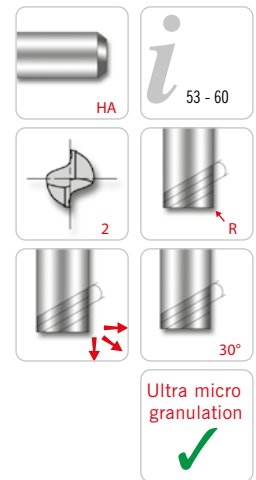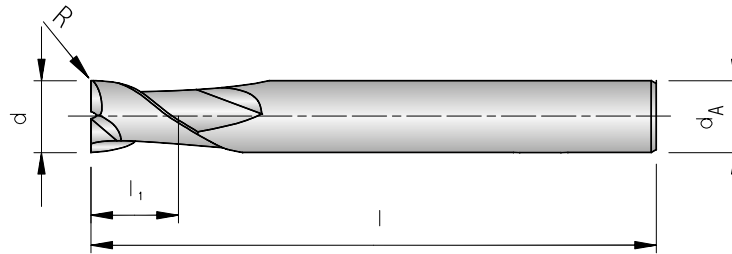

AF

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	R ± 0,03	PG 24 / Price in £ HC
						TAIN
AF50121-030R0,5	3	4	6	75	0.5	17.79
AF50121-030R1,0	3	4	6	75	1.0	17.79
AF50121-040R0,5	4	4	8	75	0.5	17.90
AF50121-040R1,0	4	4	8	75	1.0	17.90
AF50121-050R0,5	5	6	10	75	0.5	21.66
AF50121-050R1,0	5	6	10	75	1.0	21.66
AF50121-060R0,5	6	6	12	75	0.5	22.26
AF50121-060R1,0	6	6	12	75	1.0	22.26
AF50121-080R0,5	8	8	16	100	0.5	31.35
AF50121-080R1,0	8	8	16	100	1.0	31.35
AF50121-080R1,5	8	8	16	100	1.5	31.35
AF50121-080R2,0	8	8	16	100	2.0	31.35
AF50121-080R2,5	8	8	16	100	2.5	31.35
AF50121-100R0,5	10	10	20	100	0.5	43.32
AF50121-100R1,0	10	10	20	100	1.0	43.32
AF50121-100R1,5	10	10	20	100	1.5	43.32
AF50121-100R2,0	10	10	20	100	2.0	43.32
AF50121-100R2,5	10	10	20	100	2.5	43.32
AF50121-120R0,5	12	12	24	100	0.5	55.24
AF50121-120R1,0	12	12	24	100	1.0	55.24
AF50121-120R1,5	12	12	24	100	1.5	55.24
AF50121-120R2,0	12	12	24	100	2.0	55.24
AF50121-120R2,5	12	12	24	100	2.5	55.24

HC = Carbide coated

P	●
M	●
K	●
N	
S	
H	


● Main application
○ Secondary application



AF50122-...

2 flutes, extra long design

AF

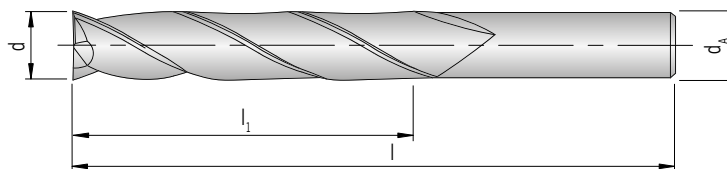

HA	53 - 60
30°	2
Ultra micro granulation ✓	

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AF50122-030	3	3	20	60	15.34
AF50122-040	4	4	20	60	15.34
AF50122-050	5	5	25	75	17.76
AF50122-060	6	6	30	75	19.29
AF50122-080	8	8	30	75	28.59
AF50122-100	10	10	40	100	36.78
AF50122-120	12	12	45	100	55.66
AF50122-140	14	14	45	100	70.63
AF50122-160	16	16	45	100	96.45
AF50122-180	18	18	45	100	106.78
AF50122-200	20	20	45	100	127.47

HC = Carbide coated



P	●
M	●
K	●
N	
S	
H	

● Main application
○ Secondary application



AF60320-...

2 flutes, short design

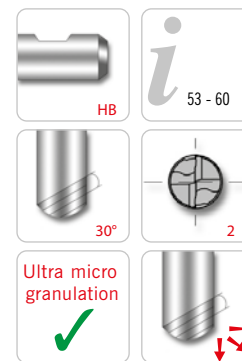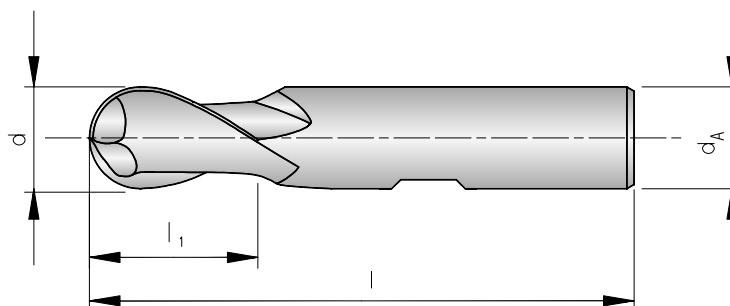

AF

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	R ± 0,02	PG 24 / Price in £ HC
						TAIN
AF60320-020	2	6	3	50	1.0	10.21
AF60320-030	3	6	4	50	1.5	10.21
AF60320-040	4	6	5	54	2.0	10.21
AF60320-050	5	6	6	54	2.5	10.21
AF60320-060	6	6	7	54	3.0	10.21
AF60320-080	8	8	9	58	4.0	12.87
AF60320-100	10	10	11	66	5.0	19.06
AF60320-120	12	12	12	73	6.0	26.94
AF60320-140	14	14	14	75	7.0	42.38
AF60320-160	16	16	16	82	8.0	43.67
AF60320-180	18	18	18	84	9.0	61.66
AF60320-200	20	20	20	92	10.0	74.60

HC = Carbide coated

P	●
M	●
K	●
N	
S	
H	



● Main application
○ Secondary application



AF50321-...

2 flutes, long design

AF

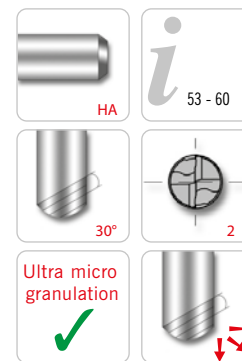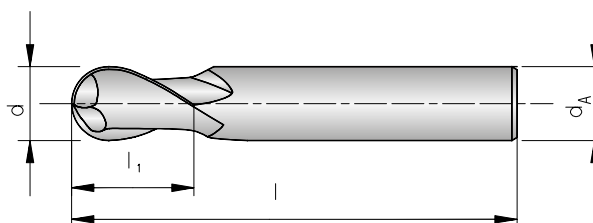

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	R ± 0,02	PG 24 / Price in £ HC
						TAIN
AF50321-030	3	3	5	75	1.5	16.40
AF50321-040	4	4	8	75	2.0	16.40
AF50321-050	5	5	9	75	2.5	16.40
AF50321-060	6	6	10	100	3.0	16.40
AF50321-080	8	8	12	100	4.0	21.92
AF50321-100	10	10	14	100	5.0	30.42
AF50321-120	12	12	16	100	6.0	40.82
AF50321-140	14	14	18	100	7.0	60.11
AF50321-160	16	16	22	150	8.0	91.99
AF50321-200	20	20	26	150	10.0	111.06

HC = Carbide coated


P	●
M	●
K	●
N	
S	
H	

● Main application
○ Secondary application



AF60321-...

2 flutes, long design

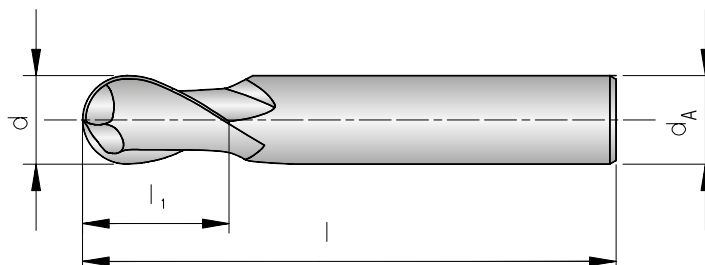

HB

53 - 60

30°

2

Ultra micro granulation

AF

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	R ± 0,02	PG 24 / Price in £ HC
						TAIN
AF60321-030	3	6	7	57	1.5	13.89
AF60321-040	4	6	8	57	2.0	13.89
AF60321-050	5	6	10	57	2.5	13.89
AF60321-060	6	6	10	57	3.0	13.89
AF60321-080	8	8	16	63	4.0	18.73
AF60321-100	10	10	19	72	5.0	27.09
AF60321-120	12	12	22	83	6.0	38.80
AF60321-140	14	14	22	83	7.0	57.54
AF60321-160	16	16	26	92	8.0	67.22
AF60321-180	18	18	26	92	9.0	101.81
AF60321-200	20	20	32	104	10.0	104.86

HC = Carbide coated

P	●
M	●
K	●
N	
S	
H	


● Main application
○ Secondary application



AF50322-...

2 flutes, extra long design

AF

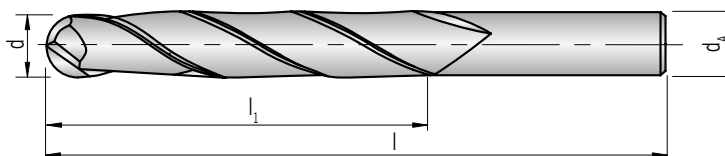

HA

53 - 60

30°

2

Ultra micro granulation

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	R ± 0,02	PG 24 / Price in £ HC
						TAIN
AF50322-030	3	3	20	60	1.5	15.86
AF50322-040	4	4	20	60	2.0	16.72
AF50322-050	5	5	25	75	2.5	20.66
AF50322-060	6	6	30	75	3.0	22.40
AF50322-080	8	8	30	75	4.0	32.73
AF50322-100	10	10	40	100	5.0	45.81
AF50322-120	12	12	45	100	6.0	68.55
AF50322-140	14	14	45	100	7.0	87.85
AF50322-160	16	16	45	100	8.0	115.93
AF50322-180	18	18	45	100	9.0	130.57
AF50322-200	20	20	45	100	10.0	155.02



HC = Carbide coated

P	●
M	●
K	●
N	
S	
H	

● Main application
○ Secondary application



AF50135-... / AF60135-...
3-skjærs, ekstra kort design

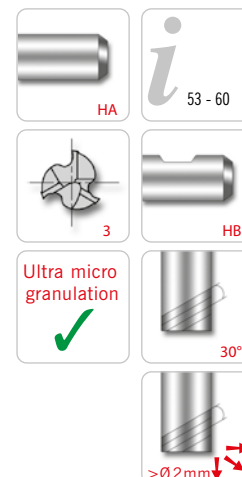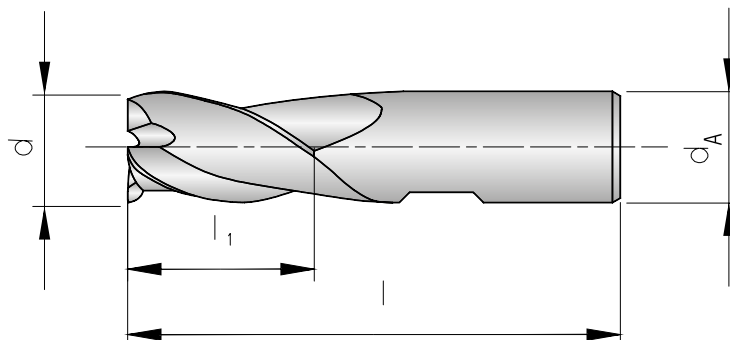

AF

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AF50135-005	0.5	3	1.5	38	12.50
AF50135-006	0.6	3	1.5	38	12.50
AF50135-008	0.8	3	2.0	38	12.50
AF50135-010	1.0	3	2.0	38	12.50
AF50135-012	1.2	3	2.0	38	12.50
AF50135-015	1.5	3	2.0	38	12.50
AF50135-018	1.8	3	2.0	38	12.05

HC = Carbide coated

P	●
M	●
K	●
N	
S	
H	

● Main application
 ○ Secondary application

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AF60135-020	2.00	6	4	35	11.53
AF60135-025	2.50	6	5	36	12.37
AF60135-030	3.00	6	5	36	11.53
AF60135-035	3.50	6	6	37	12.37
AF60135-040	4.00	6	7	38	11.53
AF60135-045	4.50	6	8	38	12.37
AF60135-050	5.00	6	8	39	11.53
AF60135-055	5.50	6	8	39	12.37
AF60135-0575	5.75	6	8	39	12.37
AF60135-060	6.00	6	8	39	11.53
AF60135-065	6.50	8	10	42	17.23
AF60135-0675	6.75	8	10	42	17.23



Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AF60135-070	7.00	8	10	42	16.73
AF60135-075	7.50	8	11	43	17.23
AF60135-0775	7.75	8	10	42	17.23
AF60135-080	8.00	8	11	43	16.73
AF60135-085	8.50	10	13	50	26.78
AF60135-087	8.70	10	11	48	26.78
AF60135-090	9.00	10	11	48	25.08
AF60135-095	9.50	10	13	50	26.78
AF60135-097	9.70	10	11	48	26.78
AF60135-100	10.00	10	13	50	26.10
AF60135-105	10.50	12	15	55	28.76
AF60135-110	11.00	12	15	55	28.76
AF60135-115	11.50	12	15	55	28.76
AF60135-120	12.00	12	15	55	28.76
AF60135-130	13.00	14	15	58	34.10
AF60135-140	14.00	14	15	58	34.10
AF60135-150	15.00	16	18	62	40.65
AF60135-160	16.00	16	18	62	40.65
AF60135-180	18.00	18	20	70	53.41
AF60135-200	20.00	20	22	75	66.91

HC = Carbide coated



P	●
M	●
K	●
N	
S	
H	

● Main application
○ Secondary application



AF61330-...

3 flutes, short design

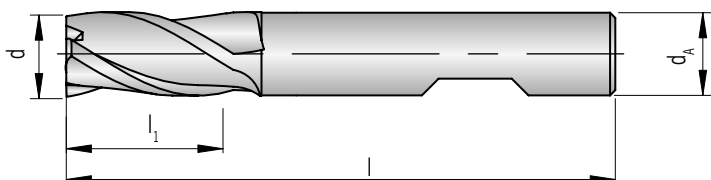

HB	i 53 - 60
30°	3
Ultra micro granulation ✓	

AF

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AF61330-020	2.0	6	3	50	11.72
AF61330-030	3.0	6	4	50	11.72
AF61330-035	3.5	6	4	50	11.72
AF61330-040	4.0	6	5	54	11.72
AF61330-045	4.5	6	5	54	11.72
AF61330-050	5.0	6	6	54	11.72
AF61330-060	6.0	6	7	54	11.72
AF61330-070	7.0	8	8	58	14.47
AF61330-080	8.0	8	9	58	14.47
AF61330-090	9.0	10	10	66	22.04
AF61330-100	10.0	10	11	66	22.04
AF61330-120	12.0	12	12	73	30.66
AF61330-140	14.0	14	14	75	40.48
AF61330-160	16.0	16	16	82	54.27
AF61330-180	18.0	18	18	84	72.69
AF61330-200	20.0	20	20	92	90.44

HC = Carbide coated



P	●
M	●
K	●
N	
S	
H	

● Main application
○ Secondary application



AF60131-...
3 flutes, long design

AF

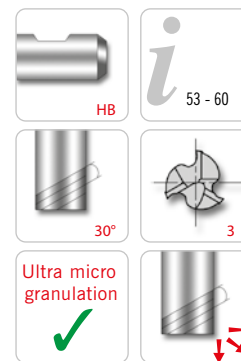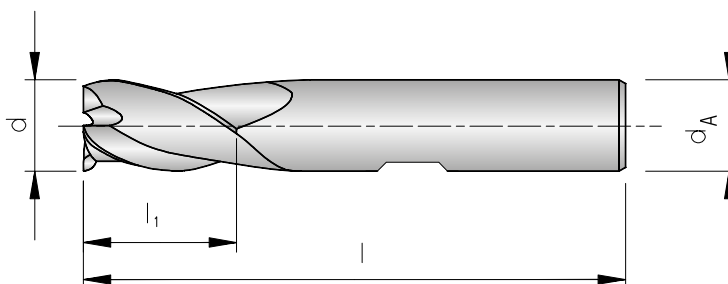

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TiAlN
AF60131-030	3	6	7	57	10.21
AF60131-040	4	6	8	57	10.21
AF60131-050	5	6	10	57	10.21
AF60131-060	6	6	10	57	10.21
AF60131-080	8	8	16	63	12.87
AF60131-090	9	10	16	72	24.03
AF60131-100	10	10	19	72	19.06
AF60131-120	12	12	22	83	26.94
AF60131-140	14	14	22	83	47.52
AF60131-160	16	16	26	92	43.67
AF60131-180	18	18	26	92	82.15
AF60131-200	20	20	32	104	74.60

HC = Carbide coated



P	●
M	●
K	●
N	
S	
H	

● Main application
○ Secondary application



AF60231-...

3 flutes, long design

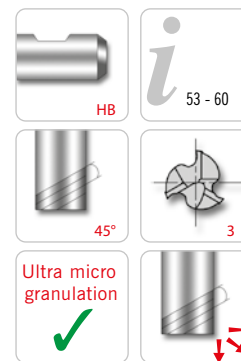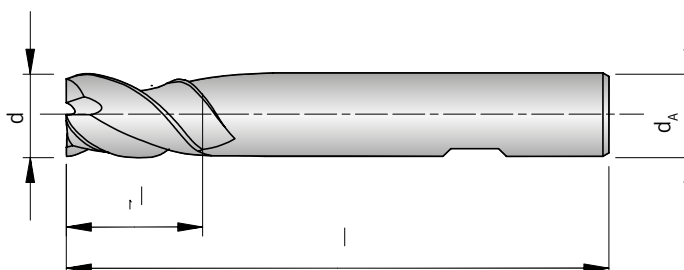

AF

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AF60231-030	3.0	6	7	57	10.21
AF60231-035	3.5	6	7	57	13.02
AF60231-040	4.0	6	8	57	10.21
AF60231-045	4.5	6	8	57	13.02
AF60231-050	5.0	6	10	57	10.21
AF60231-060	6.0	6	10	57	10.21
AF60231-070	7.0	8	13	63	16.45
AF60231-080	8.0	8	16	63	12.87
AF60231-090	9.0	10	16	72	24.03
AF60231-100	10.0	10	19	72	19.06
AF60231-120	12.0	12	22	83	26.94
AF60231-140	14.0	14	22	83	49.43
AF60231-160	16.0	16	26	92	43.67
AF60231-180	18.0	18	26	92	87.85
AF60231-200	20.0	20	32	104	74.60

HC = Carbide coated



P	●
M	●
K	●
N	
S	
H	

● Main application
○ Secondary application



AF50140-...
4 flutes, short design

AF

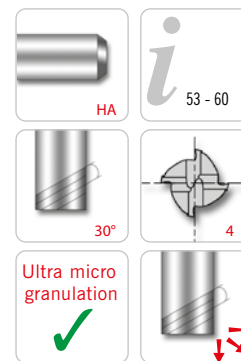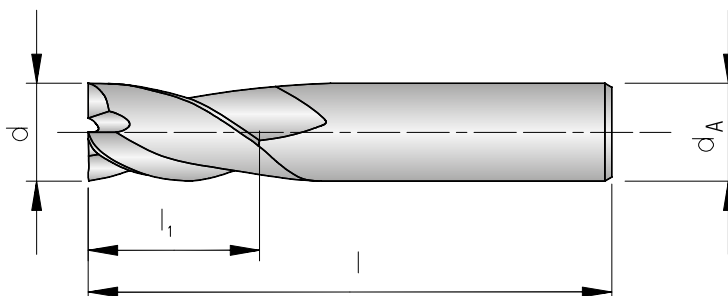

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AF50140-010	1.0	4,0	3.0	40	15.58
AF50140-015	1.5	4,0	4.5	40	15.58
AF50140-020	2.0	2,0	8.0	32	13.06
AF50140-025	2.5	2,5	8.0	32	15.58
AF50140-030	3.0	3,0	12.0	32	13.06
AF50140-035	3.5	3,5	12.0	32	15.58
AF50140-040	4.0	4,0	12.0	40	13.06
AF50140-045	4.5	4,5	14.0	50	15.58
AF50140-050	5.0	5,0	14.0	50	13.06
AF50140-055	5.5	5,5	16.0	50	16.45
AF50140-060	6.0	6,0	16.0	50	13.70
AF50140-070	7.0	7,0	20.0	60	22.82
AF50140-080	8.0	8,0	20.0	60	17.73
AF50140-090	9.0	9,0	20.0	60	34.37
AF50140-100	10.0	10,0	22.0	70	27.78
AF50140-120	12.0	12,0	22.0	70	35.46
AF50140-140	14.0	14,0	25.0	75	49.43
AF50140-160	16.0	16,0	25.0	75	44.16
AF50140-200	20.0	20,0	32.0	100	73.25

HC = Carbide coated



P	●
M	●
K	●
N	
S	
H	

● Main application
○ Secondary application



AF50140-...R...

4 flutes, short design, with corner radius

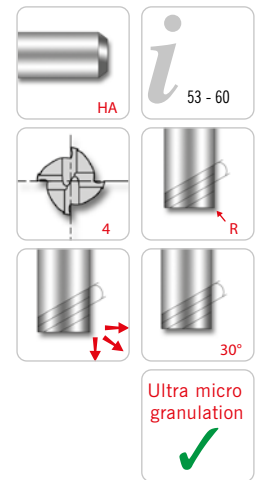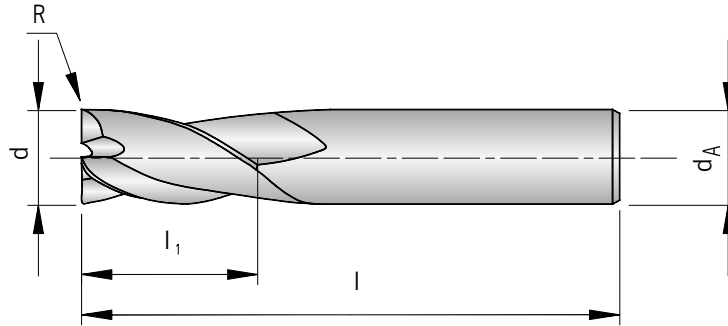

AF

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	R ± 0,03	PG 24 / Price in £ HC
						TiAlN
AF50140-020R0,2	2.0	4	4	50	0.2	14.65
AF50140-020R0,3	2.0	4	4	50	0.3	14.65
AF50140-020R0,5	2.0	4	4	50	0.5	14.65
AF50140-025R0,2	2.5	4	5	50	0.2	14.65
AF50140-025R0,3	2.5	4	5	50	0.3	14.65
AF50140-025R0,5	2.5	4	5	50	0.5	14.65
AF50140-030R0,2	3.0	4	6	50	0.2	15.68
AF50140-030R0,3	3.0	4	6	50	0.3	15.68
AF50140-030R0,5	3.0	4	6	50	0.5	15.68
AF50140-030R1,0	3.0	4	6	50	1.0	15.68
AF50140-040R0,2	4.0	4	8	50	0.2	17.49
AF50140-040R0,3	4.0	4	8	50	0.3	17.49
AF50140-040R0,5	4.0	4	8	50	0.5	17.49
AF50140-040R1,0	4.0	4	8	50	1.0	17.49
AF50140-050R0,2	5.0	6	10	50	0.2	19.27
AF50140-050R0,3	5.0	6	10	50	0.3	19.27
AF50140-050R0,5	5.0	6	10	50	0.5	19.27
AF50140-050R1,0	5.0	6	10	50	1.0	19.27
AF50140-060R0,2	6.0	6	12	50	0.2	19.27
AF50140-060R0,3	6.0	6	12	50	0.3	19.27
AF50140-060R0,5	6.0	6	12	50	0.5	19.27
AF50140-060R1,0	6.0	6	12	50	1.0	19.27
AF50140-080R0,5	8.0	8	16	60	0.5	23.88
AF50140-080R1,0	8.0	8	16	60	1.0	23.88
AF50140-080R1,5	8.0	8	16	60	1.5	23.88
AF50140-080R2,0	8.0	8	16	60	2.0	23.88
AF50140-080R2,5	8.0	8	16	60	2.5	23.88
AF50140-100R0,5	10.0	10	20	75	0.5	35.84
AF50140-100R1,0	10.0	10	20	75	1.0	35.84
AF50140-100R1,5	10.0	10	20	75	1.5	35.84
AF50140-100R2,0	10.0	10	20	75	2.0	35.84
AF50140-100R2,5	10.0	10	20	75	2.5	35.84
AF50140-120R0,5	12.0	12	24	75	0.5	50.79



Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	R ± 0,03	PG 24 / Price in £ HC
						TAIN
AF50140-120R1,0	12.0	12	24	75	1.0	50.79
AF50140-120R1,5	12.0	12	24	75	1.5	50.79
AF50140-120R2,0	12.0	12	24	75	2.0	50.79
AF50140-120R2,5	12.0	12	24	75	2.5	50.79

HC = Carbide coated



P	●
M	●
K	●
N	
S	
H	

● Main application
○ Secondary application



AF60140-...X ...

4 flutes, short design

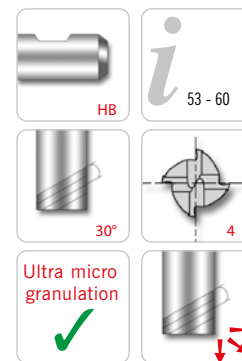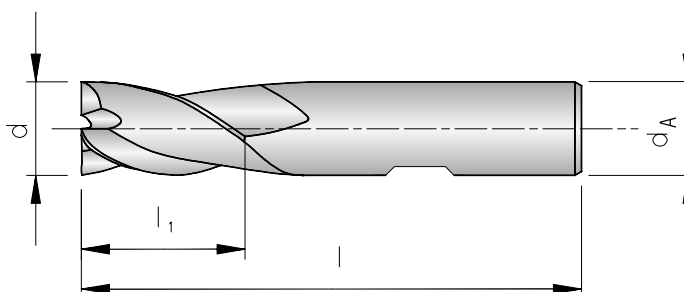

AF



Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AF60140-020X	2.0	6	4	50	15.58
AF60140-025X	2.5	6	4	50	15.58
AF60140-030X	3.0	6	5	50	15.58
AF60140-035X	3.5	6	6	50	15.58
AF60140-040X	4.0	6	8	54	15.58
AF60140-045X	4.5	6	8	54	15.58
AF60140-050X	5.0	6	9	54	15.58
AF60140-060X	6.0	6	10	54	16.45
AF60140-070X	7.0	8	11	58	22.82
AF60140-080X N	8.0	8	12	58	22.82
AF60140-090X	9.0	10	13	66	22.82
AF60140-100X	10.0	10	14	66	34.37
AF60140-120X	12.0	12	16	73	45.21
AF60140-140X	14.0	14	18	75	49.43
AF60140-160X	16.0	16	22	82	60.46
AF60140-180X	18.0	18	24	84	77.85
AF60140-200X	20.0	20	26	92	97.34

HC = Carbide coated

P	●
M	●
K	●
N	
S	
H	


● Main application
○ Secondary application



AF50141-... / AF60141-...

4 flutes, long design

AF

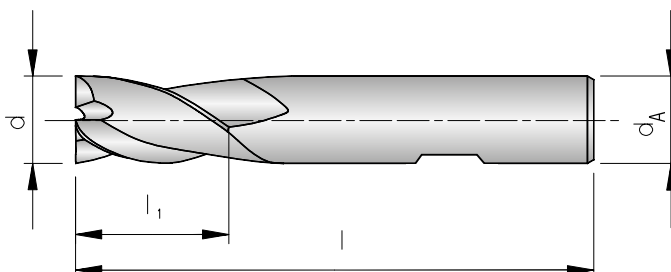

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TiAlN
AF50141-020	2	3	7	38	14.54

HC = Carbide coated

P	●
M	●
K	●
N	
S	
H	

● Main application
○ Secondary application

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TiAlN
AF60141-030	3.0	6	8	57	14.54
AF60141-035	3.5	6	10	57	15.75
AF60141-040	4.0	6	11	57	14.54
AF60141-045	4.5	6	11	57	15.75
AF60141-050	5.0	6	13	57	14.54
AF60141-060	6.0	6	13	57	15.38
AF60141-070	7.0	8	16	63	23.00
AF60141-080	8.0	8	19	63	21.25
AF60141-090	9.0	10	19	72	34.71
AF60141-100	10.0	10	22	72	32.12
AF60141-120	12.0	12	26	83	42.64



Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AF60141-140	14.0	14	26	83	47.39
AF60141-160	16.0	16	32	92	53.34
AF60141-180	18.0	18	32	92	82.15
AF60141-200	20.0	20	38	104	88.63

HC = Carbide coated

P	●
M	●
K	●
N	
S	
H	



- Main application
- Secondary application



AF50141-...R...

4 flutes, long design, with corner radius

AF

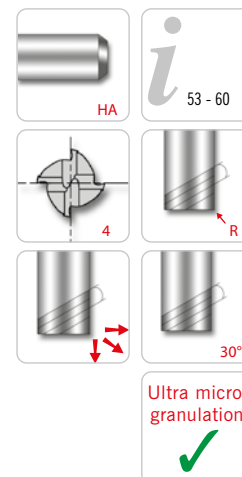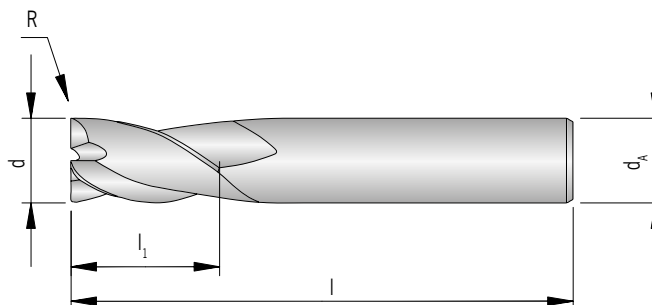

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	R ± 0,03	PG 24 / Price in £ HC
						TiAlN
AF50141-030R0,5	3	4	6	75	0.5	17.79
AF50141-030R1,0	3	4	6	75	1.0	17.79
AF50141-040R0,5	4	4	8	75	0.5	17.90
AF50141-040R1,0	4	4	8	75	1.0	17.90
AF50141-050R0,5	5	6	10	75	0.5	21.66
AF50141-050R1,0	5	6	10	75	1.0	21.66
AF50141-060R0,5	6	6	12	75	0.5	22.26
AF50141-060R1,0	6	6	12	75	1.0	22.26
AF50141-080R0,5	8	8	16	100	0.5	31.35
AF50141-080R1,0	8	8	16	100	1.0	31.35
AF50141-080R1,5	8	8	16	100	1.5	31.35
AF50141-080R2,0	8	8	16	100	2.0	31.35
AF50141-080R2,5	8	8	16	100	2.5	31.35
AF50141-100R0,5	10	10	20	100	0.5	43.32
AF50141-100R1,0	10	10	20	100	1.0	43.32
AF50141-100R1,5	10	10	20	100	1.5	43.32
AF50141-100R2,0	10	10	20	100	2.0	43.32
AF50141-100R2,5	10	10	20	100	2.5	43.32
AF50141-120R0,5	12	12	24	100	0.5	55.24
AF50141-120R1,0	12	12	24	100	1.0	55.24
AF50141-120R1,5	12	12	24	100	1.5	55.24
AF50141-120R2,0	12	12	24	100	2.0	55.24
AF50141-120R2,5	12	12	24	100	2.5	55.24

HC = Carbide coated


P	●
M	●
K	●
N	
S	
H	

● Main application
○ Secondary application



AF50142-...X ... / AF60142-...X ...

4 flutes, extra long design

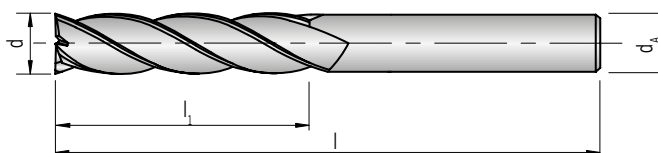

AF

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TiAlN
AF50142-030X	3	3	20	60	15.75
AF50142-040X	4	4	20	60	15.75
AF50142-050X	5	5	25	75	17.76
AF50142-060X	6	6	30	75	19.29
AF50142-080X	8	8	30	75	28.59
AF50142-100X	10	10	40	100	36.87
AF50142-120X	12	12	45	100	55.66
AF50142-140X	14	14	45	100	70.63
AF50142-160X	16	16	45	100	96.63
AF50142-180X	18	18	45	100	106.78
AF50142-200X	20	20	45	100	129.18

HC = Carbide coated

P	●
M	●
K	●
N	
S	
H	

● Main application
○ Secondary application



Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AF60142-060X	6	6	30	75	19.29
AF60142-080X	8	8	30	75	28.59
AF60142-100X	10	10	40	100	36.87

HC = Carbide coated



P	●
M	●
K	●
N	
S	
H	

- Main application
- Secondary application



AF50340-...

4 flutes, short design

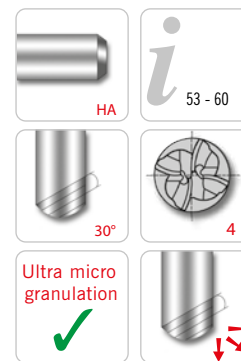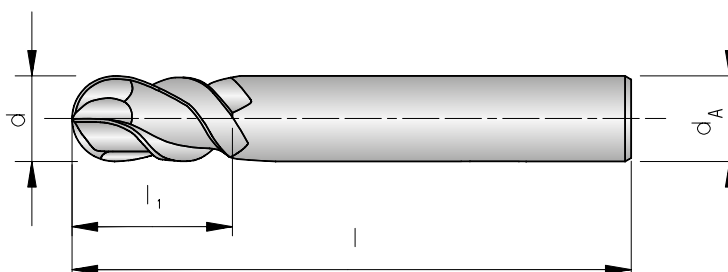

AF

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	R ± 0,02	PG 24 / Price in £ HC
						TAIN
AF50340-020	2	6	4	48	1.0	12.94
AF50340-030	3	6	4	48	1.5	12.94
AF50340-040	4	6	6	50	2.0	12.94
AF50340-050	5	6	7	51	2.5	12.94
AF50340-060	6	6	7	51	3.0	14.12
AF50340-080	8	8	9	59	4.0	20.50
AF50340-100	10	10	10	60	5.0	31.02
AF50340-120	12	12	14	71	6.0	41.35
AF50340-140	14	14	14	71	7.0	49.96
AF50340-160	16	16	16	76	8.0	63.04
AF50340-180	18	18	18	76	9.0	70.63
AF50340-200	20	20	20	82	10.0	94.06

HC = Carbide coated

P	●
M	●
K	●
N	
S	
H	


● Main application
○ Secondary application



AF502.0-...

4 - 6 flutes, short design

AF

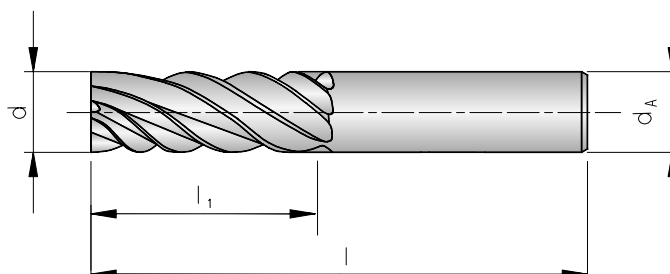

HA

i 53 - 60

45°

4-6

Ultra micro granulation

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	z	PG 24 / Price in £ HC
						TAIN
AF50240-030	3	4	8	50	4	11.31
AF50240-040	4	4	11	50	4	11.31
AF50260-050	5	6	13	50	6	13.36
AF50260-060	6	6	16	50	6	13.36
AF50260-080	8	8	19	60	6	19.13
AF50260-100	10	10	22	75	6	28.29
AF50260-120	12	12	26	75	6	37.18
AF50260-140	14	14	30	90	6	46.08
AF50260-160	16	16	32	100	6	61.12
AF50260-180	18	18	38	100	6	78.82
AF50260-200	20	20	38	100	6	97.46

HC = Carbide coated


P	●
M	●
K	●
N	
S	
H	

● Main application
○ Secondary application



AF50261-...

6 flutes, long design

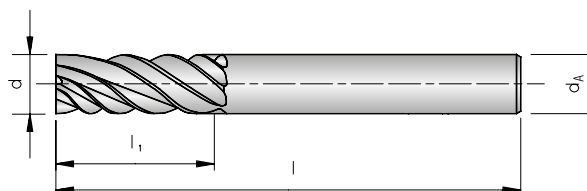

HA	i 53 - 60
45°	6
Ultra micro granulation ✓	

AF

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	z	PG 24 / Price in £ HC
						TAIN
AF50261-120	12	12	50	100	6	51.02
AF50261-160	16	16	65	150	6	106.24
AF50261-200	20	20	70	150	6	155.23

HC = Carbide coated

P	●
M	●
K	●
N	
S	
H	


● Main application
○ Secondary application



AF614.1-...

3 - 5 flutes, long design

AF

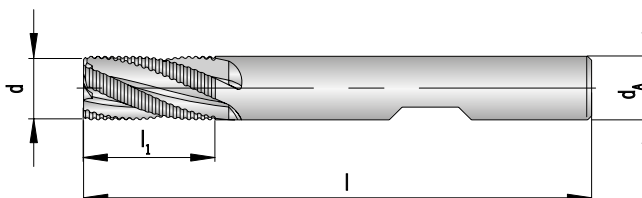

HB	i 53 - 60
30°	3-5
Ultra micro granulation ✓	

Shank DIN 6535HB	d h10	d _A h6	l ₁	l	z	PG 24 / Price in £ HC
						TAIN
AF61431-060	6	6	16	57	3	20.94
AF61431-080	8	8	16	63	3	24.86
AF61441-100	10	10	22	72	4	37.12
AF61441-120	12	12	26	83	4	50.56
AF61441-140	14	14	26	83	4	59.58
AF61441-160	16	16	32	92	4	76.09
AF61441-180	18	18	32	92	4	101.29
AF61441-200	20	20	38	104	4	115.58
AF61451-250	25	25	45	121	5	246.81

HC = Carbide coated

P	●
M	●
K	●
N	
S	
H	

● Main application
○ Secondary application



AF

Material group	Structure of the material groups and identification letters		Brinell hardness HB	Tensile strength Rm (N/mm ²)	Chipping group	Correction factor	Cutting speed V _c (m/min)		
							VHM	TAIN	
P	Unalloyed steel	C ≤ 0.25 % annealed	125	428	P1	1,2	100 - 170 - 240		
		C > 0.25 ... ≤ 0.55 % annealed	190	639	P2	1,2	100 - 170 - 240		
		C > 0.25 ... ≤ 0.55 % hardened and tempered	210	708	P3	1,2	90 - 155 - 220		
		C > 0.55 % annealed	190	639	P4	1,2	100 - 170 - 240		
		C > 0.55 % hardened and tempered	300	1013	P5	1,0	60 - 100 - 140		
		Machining steel (short-chipping) tempered	220	745	P6	1,2	100 - 170 - 240		
	Low alloyed steel		annealed	175	591	P7	1,2	90 - 145 - 200	
			hardened and tempered	300	1013	P8	1,0	90 - 105 - 120	
			hardened and tempered	380	1282	P9	0,8	60 - 90 - 120	
			hardened and tempered	430	1477	P10	0,8	61 - 90 - 120	
	High alloyed steel and high alloyed tool steel		annealed	200	675	P11	1,2	90 - 145 - 200	
			hardened	300	1013	P12	1,0	90 - 115 - 140	
			hardened	400	1361	P13	0,8	60 - 85 - 110	
	Stainless steel		ferritic / martensitic, annealed	200	675	P14	1,0	50 - 85 - 120	
			martensitic, hardened and tempered	330	1114	P15	0,9	30 - 55 - 80	
M	Stainless steel	austenitic, chilled	200	675	M1	1,0	60 - 90 - 20		
		austenitic, precipitation-hardened (PH)	300	1013	M2	0,9	30 - 55 - 80		
		austenitic-ferritic, Duplex	230	778	M3	1,0	50 - 85 - 120		
K	Malleable cast iron	ferritic	200	675	K1	1,0	80 - 120 - 160		
		pearlitic	260	867	K2	0,8	70 - 110 - 150		
	Cast iron	low tensile strength	180	602	K3	1,0	80 - 120 - 160		
		high tensile strength / austenitic	245	825	K4	1,0	70 - 110 - 150		
	Cast iron with nodular graphite	ferritic	155	518	K5	1,0	80 - 120 - 160		
		pearlitic	265	885	K6	1,0	70 - 110 - 150		
	GGV (CGI)		200	675	K7	1,0	80 - 120 - 160		
N	Aluminium alloys long chipping	not heat treatable	30	-	N1		-		
		heat treatable, heat treated	100	343	N2		-		
	Casted aluminium alloys	≤ 12 % Si, not heat treatable	75	260	N3		-		
		≤ 12 % Si, aushärtbar, ausgehärtet	90	314	N4		-		
		> 12 % Si, not heat treatable	130	447	N5		-		
	Magnesium alloys		70	250	N6		-		
	Copper and copper alloys (Brass / Bronze)		Unalloyed, elektrolyte copper	100	343	N7		-	
			Brass, Bronze	90	314	N8		-	
			Cu-alloys, short-chipping	110	382	N9		-	
			High-tensile, Ampco	300	1013	N10		-	
	Non-ferrous materials		Lead alloys (without abrasive filling material)	-	-	N11		-	
			Duroplastic (without abrasive filling material)	-	-	N12		-	
			Plastic glas fibre reinforced GFRP	-	-	N13		-	
			Plastic carbon fibre reinforced CFRP	-	-	N14		-	
			Plastic aramid fibre reinforced AFRP	-	-	N15		-	
			Graphite (tech.)	80 Shore	-	N16		-	
S	High temperature resistant alloys	Fe-Basis	annealed	200	675	S1		-	
			heat treated	280	943	S2		-	
		Ni- or Co-alloyed	annealed	250	839	S3		-	
			heat treated	350	1177	S4		-	
			casting	320	1076	S5		-	
	Titanium alloys		Pure titan	200	675	S6		-	
			α- and β-alloys, heat treated	375	1262	S7		-	
			β-alloys	410	1396	S8		-	
	Wolfram alloys		300	1013	S9		-		
	Molybdän alloys		300	1013	S10		-		
H	Hardened steel		hardened	50 HRC	-	H1		-	
			hardened	55 HRC	-	H2		-	
			hardened	60 HRC	-	H3		-	
	Hardened cast iron		hardened	55 HRC	-	H4		-	

The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.



For the following feed tables the values must be corrected depending on the material being machined in line with the correction factor.

An example using a cutter with $\varnothing 6$ mm is detailed:

V_c-table

ISO	Material	Strength [N/mm ² - HB]	K _f [x f _z]	TiAlN V _c [m/min]
P	General construction steel	< 800 N/mm ²	1,2	100 - 150
	Free cutting steel	< 800 N/mm ²	1,2	100 - 150
	Case hardened steel, non alloyed	< 800 N/mm ²	1,2	100 - 150
	Alloyed case hardened steel	< 1000 N/mm ²	1	90 - 120
	Tempering steel, non alloyed	< 850 N/mm ²	1,2	90 - 130
	Tempering steel, non alloyed	< 1000 N/mm ²	1	60 - 90
	Tempering steel, alloyed	< 800 N/mm ²	1,2	90 - 120
	Tempering steel, alloyed	< 1300 N/mm ²	0,8	60 - 80
	Steel castings	< 850 N/mm ²	1,2	70 - 100

f_z-table

Ø d ₁ [mm]	Correction factor		
	1	0,7	0,8
1	0,004	0,003	0,003
2	0,008	0,006	0,006
3	0,012	0,008	0,010
4	0,016	0,011	0,013
5	0,020	0,014	0,016
6	0,024	0,017	0,019
8	0,032	0,022	0,026

For case-hardening alloy steel the feed value from the table is valid: $K_f(f_z) = 1$ (according to 100%) $f_z = 0,024$
 For heat treatable steel alloys < 1300 N/mm² the feed value from the table is reduced by 20%.
 $K_f(f_z) = 0,8$ (according to 80%) $f_z = 0,019$

General rule:

Feed per tooth:

$$= f_z \cdot K_f(f_z)$$


For axial plunge milling:

$$= \text{Table value} / \text{Number of teeth}$$




Feed per tooth with radial depth of cut from 0,2 – 0,3 mm

Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,004	0,003	0,003	0,004	0,004	0,005	0,006	0,006	0,007	0,008
2	0,008	0,006	0,006	0,007	0,009	0,010	0,012	0,013	0,014	0,015
3	0,012	0,008	0,010	0,011	0,013	0,014	0,018	0,019	0,022	0,023
4	0,016	0,011	0,013	0,014	0,018	0,019	0,024	0,026	0,029	0,030
5	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
6	0,024	0,017	0,019	0,022	0,026	0,029	0,036	0,038	0,043	0,046
8	0,032	0,022	0,026	0,029	0,035	0,038	0,048	0,051	0,058	0,061
10	0,040	0,028	0,032	0,036	0,044	0,048	0,060	0,064	0,072	0,076
12	0,048	0,034	0,038	0,043	0,053	0,058	0,072	0,077	0,086	0,091
14	0,056	0,039	0,045	0,050	0,062	0,067	0,084	0,090	0,101	0,106
16	0,064	0,045	0,051	0,058	0,070	0,077	0,096	0,102	0,115	0,122
18	0,072	0,050	0,058	0,065	0,079	0,086	0,108	0,115	0,130	0,137
20	0,080	0,056	0,064	0,072	0,088	0,096	0,120	0,128	0,144	0,152
25	0,100	0,070	0,080	0,090	0,110	0,120	0,150	0,160	0,180	0,190

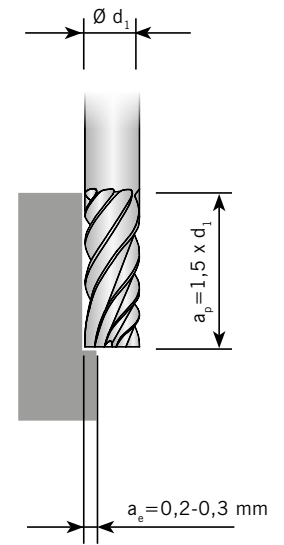

Feed per tooth with radial depth of cut of 10% of the cutter (Ø d₁)

Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,003	0,002	0,002	0,003	0,003	0,004	0,005	0,005	0,005	0,006
2	0,008	0,006	0,006	0,007	0,009	0,010	0,012	0,013	0,014	0,015
3	0,012	0,008	0,010	0,011	0,013	0,014	0,018	0,019	0,022	0,023
4	0,014	0,010	0,011	0,013	0,015	0,017	0,021	0,022	0,025	0,027
5	0,017	0,012	0,014	0,015	0,019	0,020	0,026	0,027	0,031	0,032
6	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
8	0,027	0,019	0,022	0,024	0,030	0,032	0,041	0,043	0,049	0,051
10	0,033	0,023	0,026	0,030	0,036	0,040	0,050	0,053	0,059	0,063
12	0,040	0,028	0,032	0,036	0,044	0,048	0,060	0,064	0,072	0,076
14	0,047	0,033	0,038	0,042	0,052	0,056	0,071	0,075	0,085	0,089
16	0,053	0,037	0,042	0,048	0,058	0,064	0,080	0,085	0,095	0,101
18	0,060	0,042	0,048	0,054	0,066	0,072	0,090	0,096	0,108	0,114
20	0,067	0,047	0,054	0,060	0,074	0,080	0,101	0,107	0,121	0,127
25	0,083	0,058	0,066	0,075	0,091	0,100	0,125	0,133	0,149	0,158

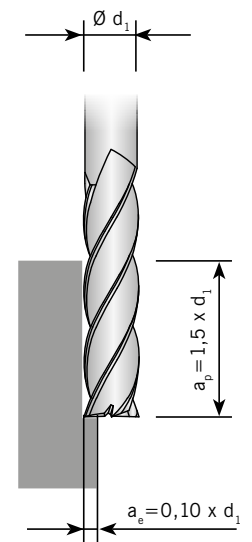


Attention: Take the correction factor from the table "Cutting speeds".
 Correction factor -> 1,1 with a_p = 1 x d₁ -> 1,2 with a_p = 0,5 x d₁




Feed per tooth with radial depth of cut of 20% of the cutter (ϕd_1)

ϕd_1 [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,002	0,001	0,001	0,001	0,002	0,002	0,003	0,003	0,003	0,003
2	0,005	0,003	0,004	0,004	0,005	0,006	0,007	0,008	0,009	0,009
3	0,008	0,005	0,006	0,007	0,008	0,009	0,012	0,012	0,014	0,015
4	0,010	0,007	0,008	0,009	0,011	0,012	0,015	0,016	0,018	0,019
5	0,013	0,009	0,010	0,011	0,014	0,015	0,019	0,020	0,023	0,024
6	0,015	0,010	0,012	0,013	0,016	0,018	0,022	0,024	0,027	0,028
8	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
10	0,025	0,017	0,020	0,022	0,027	0,030	0,037	0,040	0,045	0,047
12	0,030	0,021	0,024	0,027	0,033	0,036	0,045	0,048	0,054	0,057
14	0,035	0,024	0,028	0,031	0,038	0,042	0,052	0,056	0,063	0,066
16	0,040	0,028	0,032	0,036	0,044	0,048	0,060	0,064	0,072	0,076
18	0,045	0,031	0,036	0,040	0,049	0,054	0,067	0,072	0,081	0,085
20	0,050	0,035	0,040	0,045	0,055	0,060	0,075	0,080	0,090	0,095
25	0,063	0,044	0,050	0,056	0,069	0,075	0,094	0,100	0,113	0,119

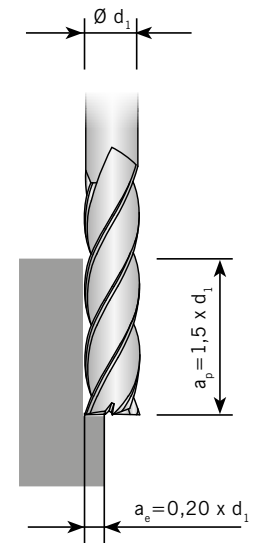

Feed per tooth with radial depth of cut of 40% of the cutter (ϕd_1)

ϕd_1 [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,001	0,002	0,002	0,002	0,003
2	0,004	0,002	0,003	0,003	0,004	0,004	0,006	0,006	0,007	0,007
3	0,006	0,004	0,005	0,005	0,007	0,007	0,009	0,010	0,011	0,012
4	0,008	0,005	0,006	0,007	0,008	0,009	0,012	0,012	0,014	0,015
5	0,010	0,007	0,008	0,009	0,011	0,012	0,015	0,016	0,018	0,019
6	0,012	0,008	0,009	0,010	0,013	0,014	0,018	0,019	0,021	0,022
8	0,016	0,011	0,012	0,014	0,017	0,019	0,024	0,025	0,028	0,030
10	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
12	0,024	0,016	0,019	0,021	0,026	0,028	0,036	0,038	0,043	0,045
14	0,028	0,019	0,022	0,025	0,030	0,033	0,042	0,044	0,050	0,053
16	0,032	0,022	0,025	0,028	0,035	0,038	0,048	0,051	0,057	0,060
18	0,036	0,025	0,028	0,032	0,039	0,043	0,054	0,057	0,064	0,068
20	0,040	0,028	0,032	0,036	0,044	0,048	0,060	0,064	0,072	0,076
25	0,050	0,035	0,040	0,045	0,055	0,060	0,075	0,080	0,090	0,095

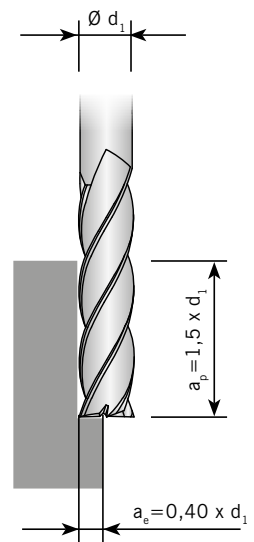


Attention: Take the correction factor from the table "Cutting speeds".
Correction factor -> 1,1 with $a_p = 1 \times d_1$ -> 1,2 with $a_p = 0,5 \times d_1$

AF




Feed per tooth with radial depth of cut of 60% of the cutter ($\varnothing d_1$)

$\varnothing d_1$ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,002	0,002	0,002
2	0,003	0,002	0,002	0,002	0,003	0,003	0,004	0,005	0,005	0,006
3	0,005	0,003	0,004	0,004	0,005	0,006	0,007	0,008	0,009	0,009
4	0,006	0,004	0,005	0,005	0,007	0,007	0,009	0,010	0,011	0,012
5	0,008	0,005	0,006	0,007	0,009	0,010	0,012	0,013	0,015	0,016
6	0,009	0,006	0,007	0,008	0,010	0,011	0,014	0,015	0,017	0,018
8	0,013	0,009	0,010	0,011	0,014	0,015	0,019	0,020	0,023	0,024
10	0,016	0,011	0,013	0,014	0,017	0,019	0,024	0,026	0,029	0,030
12	0,019	0,013	0,015	0,017	0,021	0,023	0,029	0,031	0,035	0,037
14	0,022	0,015	0,018	0,020	0,025	0,027	0,034	0,036	0,040	0,043
16	0,026	0,018	0,020	0,023	0,028	0,031	0,039	0,041	0,046	0,049
18	0,029	0,020	0,023	0,026	0,032	0,035	0,043	0,046	0,052	0,055
20	0,032	0,022	0,026	0,029	0,035	0,039	0,048	0,052	0,058	0,061
25	0,040	0,028	0,032	0,036	0,045	0,049	0,061	0,065	0,073	0,077

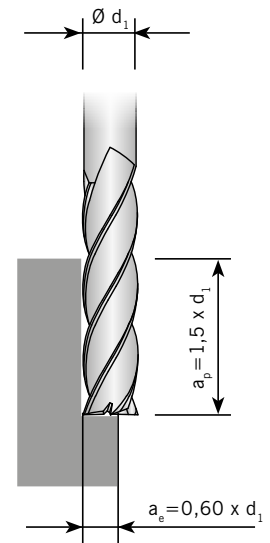

Feed per tooth with radial depth of cut of 80% of the cutter ($\varnothing d_1$)

$\varnothing d_1$ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001
2	0,002	0,001	0,002	0,002	0,002	0,003	0,003	0,004	0,004	0,004
3	0,004	0,002	0,003	0,003	0,004	0,004	0,006	0,006	0,007	0,007
4	0,005	0,003	0,004	0,004	0,005	0,006	0,007	0,008	0,009	0,009
5	0,006	0,004	0,005	0,005	0,007	0,007	0,009	0,010	0,011	0,012
6	0,007	0,005	0,006	0,006	0,008	0,009	0,011	0,012	0,013	0,014
8	0,010	0,007	0,008	0,009	0,011	0,012	0,015	0,016	0,018	0,019
10	0,012	0,008	0,010	0,011	0,013	0,015	0,018	0,020	0,022	0,023
12	0,015	0,010	0,012	0,013	0,016	0,018	0,022	0,024	0,027	0,028
14	0,017	0,012	0,014	0,015	0,019	0,021	0,026	0,028	0,031	0,033
16	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
18	0,022	0,015	0,018	0,020	0,024	0,027	0,033	0,036	0,040	0,042
20	0,025	0,017	0,020	0,022	0,027	0,030	0,037	0,040	0,045	0,047
25	0,031	0,022	0,025	0,028	0,034	0,037	0,047	0,050	0,056	0,059

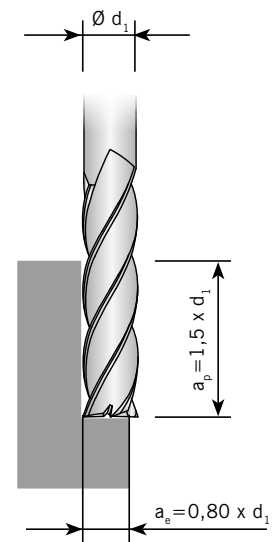


Attention: Take the correction factor from the table "Cutting speeds".
Correction factor -> 1,1 with $a_p = 1 \times d_1$ -> 1,2 with $a_p = 0,5 \times d_1$



Feed per tooth when full slot milling → $a_p = 0,5 \times d_1$


Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,002	0,001	0,001	0,001	0,002	0,002	0,003	0,003	0,003	0,003
2	0,004	0,002	0,003	0,003	0,004	0,004	0,006	0,006	0,007	0,007
3	0,007	0,004	0,005	0,006	0,007	0,008	0,010	0,011	0,012	0,013
4	0,009	0,006	0,007	0,008	0,009	0,010	0,013	0,014	0,016	0,017
5	0,011	0,007	0,008	0,009	0,012	0,013	0,016	0,017	0,019	0,020
6	0,013	0,009	0,010	0,011	0,014	0,015	0,019	0,020	0,023	0,024
8	0,018	0,012	0,014	0,016	0,019	0,021	0,027	0,028	0,032	0,034
10	0,022	0,015	0,017	0,019	0,024	0,026	0,033	0,035	0,039	0,041
12	0,030	0,021	0,024	0,027	0,033	0,036	0,045	0,048	0,054	0,057
14	0,032	0,022	0,025	0,028	0,035	0,038	0,048	0,051	0,057	0,060
16	0,036	0,025	0,028	0,032	0,039	0,043	0,054	0,057	0,064	0,068
18	0,042	0,029	0,033	0,037	0,046	0,050	0,063	0,067	0,075	0,079
20	0,045	0,031	0,036	0,040	0,049	0,054	0,067	0,072	0,081	0,085
25	0,056	0,039	0,044	0,050	0,061	0,067	0,084	0,089	0,100	0,106

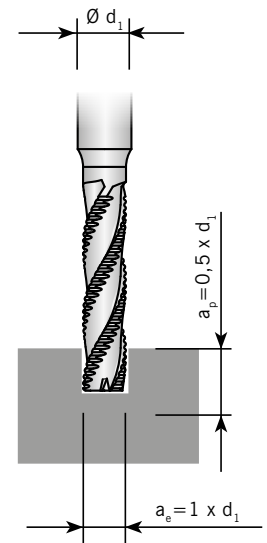

AF

Feed per tooth when full slot milling → $a_p = 1 \times d_1$


Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,002	0,002	0,002	0,002	0,002
2	0,003	0,002	0,002	0,002	0,003	0,003	0,004	0,004	0,005	0,005
3	0,005	0,003	0,004	0,004	0,005	0,005	0,007	0,007	0,008	0,009
4	0,006	0,004	0,005	0,005	0,006	0,007	0,009	0,009	0,011	0,011
5	0,007	0,005	0,006	0,006	0,008	0,009	0,011	0,011	0,013	0,014
6	0,008	0,006	0,007	0,008	0,009	0,010	0,013	0,014	0,015	0,016
8	0,012	0,008	0,009	0,011	0,013	0,014	0,018	0,019	0,021	0,022
10	0,014	0,010	0,011	0,013	0,016	0,017	0,021	0,023	0,026	0,027
12	0,020	0,014	0,016	0,018	0,021	0,023	0,029	0,031	0,035	0,037
14	0,021	0,015	0,017	0,019	0,023	0,025	0,031	0,033	0,037	0,040
16	0,023	0,016	0,019	0,021	0,026	0,028	0,035	0,037	0,042	0,044
18	0,027	0,019	0,022	0,025	0,030	0,033	0,041	0,044	0,049	0,052
20	0,029	0,020	0,023	0,026	0,032	0,035	0,044	0,047	0,053	0,056
25	0,036	0,025	0,029	0,033	0,040	0,044	0,055	0,058	0,066	0,069

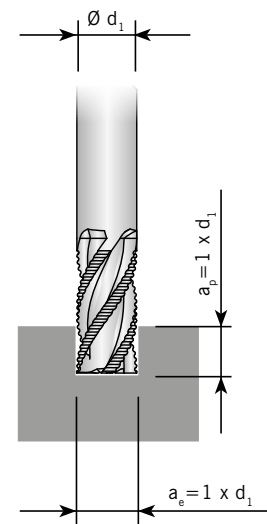

Attention: Feed rates are reduced by 10 - 20% for uncoated tools.



Feed rates for ball nosed- and High feed cutters

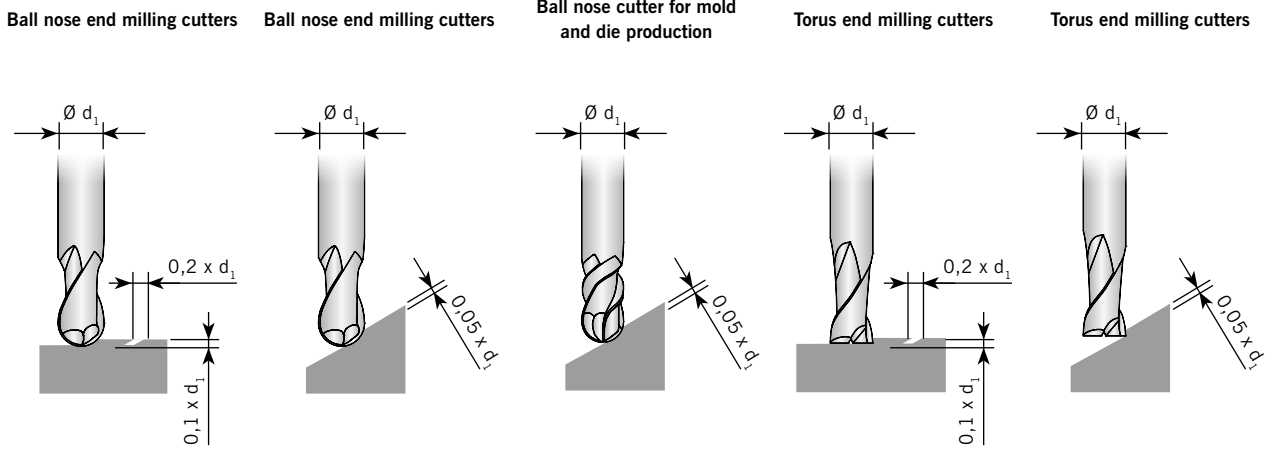


d_1 [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]
2	0,015	0,010	0,005	0,010	0,015
3	0,030	0,020	0,015	0,015	0,020
4	0,040	0,030	0,030	0,020	0,030
5	0,060	0,050	0,050	0,030	0,040
6	0,070	0,060	0,060	0,050	0,060
8	0,100	0,080	0,070	0,070	0,080
10	0,120	0,100	0,080	0,080	0,100
12	0,150	0,120	0,090	0,100	0,120
16	0,180	0,150	0,100	0,120	0,150
18	0,200	0,180	0,110	0,140	0,160
20	0,220	0,200	0,120	0,150	0,180
25	0,240	0,220	0,140	0,160	0,200

Attention: Feed rates are reduced by 10-20% for uncoated tools.

HIGH PERFORMANCE FOR ALUMINIUM AND NON-FERROUS MATERIALS.

Best performance for aluminium and non-ferrous materials. The dedicated geometry with a very strong cutting edge guarantees best surface finish and excellent chip flow.

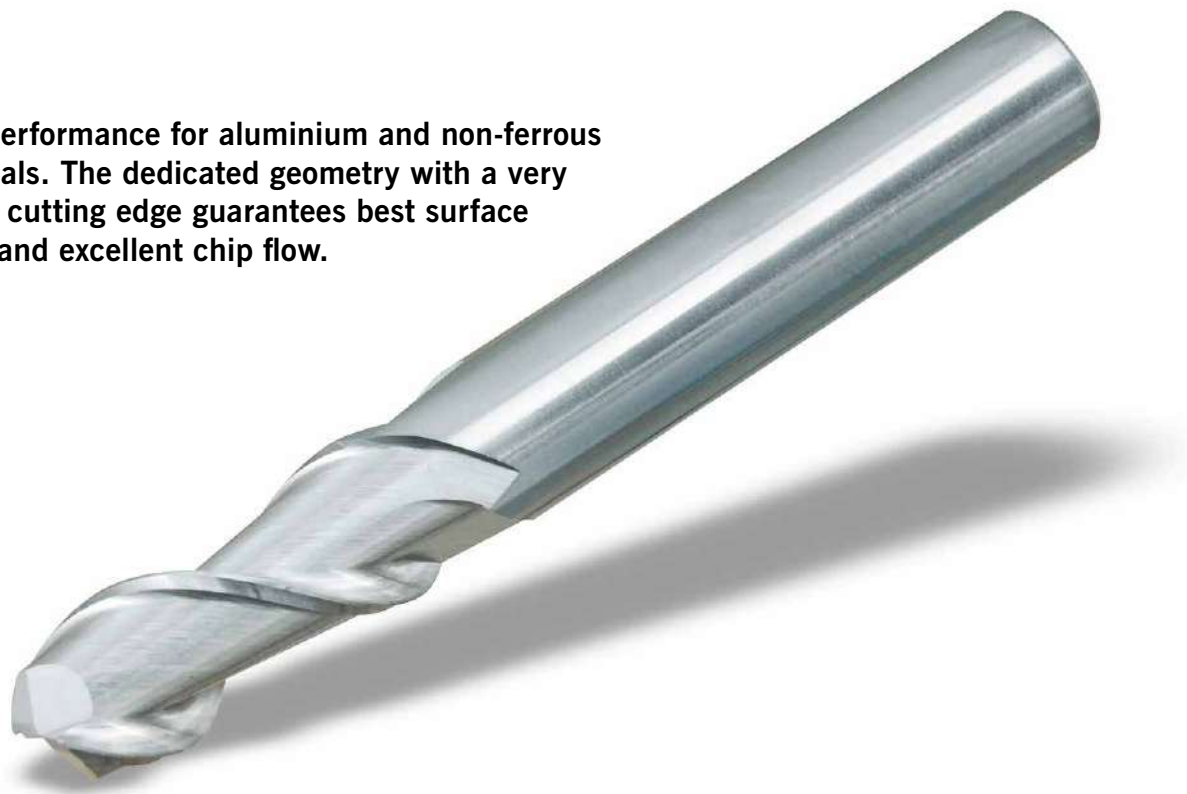




AFA50116-...

1 flute, mid-length design

AFA

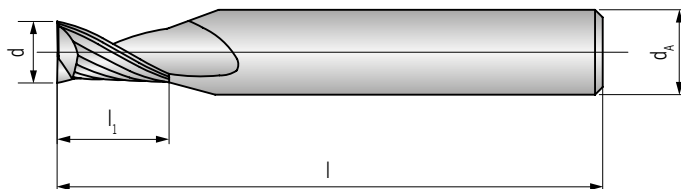

HA	85 - 91
30°	1
Ultra micro granulation ✓	

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TICN
AFA50116-020	2	3	8	50	10.84
AFA50116-030	3	3	12	50	11.08
AFA50116-040	4	4	15	60	12.39
AFA50116-050	5	5	17	60	14.69
AFA50116-060	6	6	20	65	15.29
AFA50116-080	8	8	22	65	31.89
AFA50116-100	10	10	25	75	62.56
AFA50116-120	12	12	30	80	78.20


HC = Carbide coated

P	
M	
K	
N	●
S	
H	

● Main application
○ Secondary application



AFA50220-...
2 flutes, short design

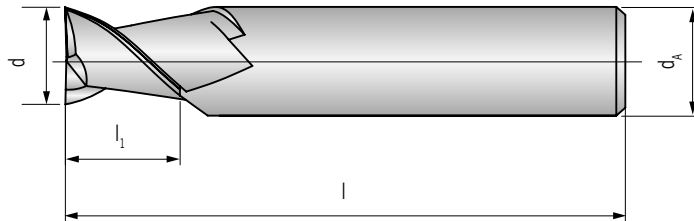

HA	i 85 - 91
45°	2
Ultra micro granulation ✓	

AFA

Shank DIN 6535HA	d -0,015	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TICN
AFA50220-030	3	6	5	50	10.84
AFA50220-040	4	6	8	54	11.08
AFA50220-050	5	6	9	54	12.39
AFA50220-060	6	6	10	54	14.69
AFA50220-080	8	8	12	58	15.29
AFA50220-100	10	10	14	66	31.89
AFA50220-120	12	12	16	73	62.56
AFA50220-140	14	14	18	75	78.20
AFA50220-160	16	16	22	82	83.02
AFA50220-180	18	18	24	84	108.30
AFA50220-200	20	20	26	92	134.78

HC = Carbide coated


P	
M	
K	
N	●
S	
H	

● Main application
○ Secondary application



AFA51820-...
2 flutes, short design

AFA

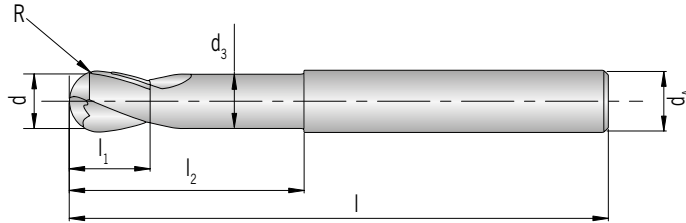

HA

i 85 - 91

50°

2

Ultra micro granulation

✓

Shank DIN 6535HA	d -0,02	d _A h6	d ₃	l ₁	l ₂	l	R ±0,01	PG 24 / Price in £ HC
								TiCN
AFA51820-060	6	6	5.4	5.5	25	55	3	19.40
AFA51820-080	8	8	7.2	7.0	30	65	4	30.62
AFA51820-100	10	10	9.0	8.5	35	75	5	45.16
AFA51820-120	12	12	11.0	10.5	40	75	6	58.38
AFA51820-160	16	16	14.5	14.0	50	90	8	97.18
AFA51820-200	20	20	18.0	17.0	50	100	10	140.66

HC = Carbide coated


P	
M	
K	
N	●
S	
H	

● Main application
○ Secondary application



AFA51521-...

2 flutes, long design, uncoated

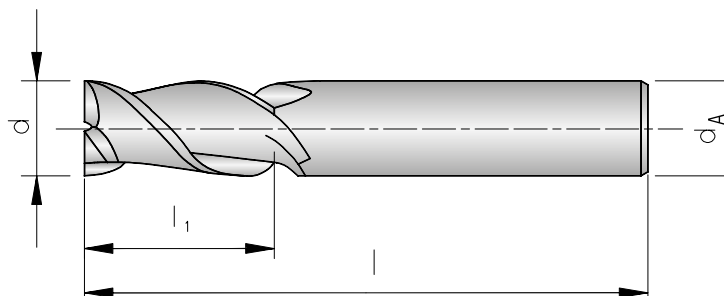

HA	85 - 91
45°	2
Ultra micro granulation	

AFA

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HU
					AK1010
AFA51521-030	3	6	8	57	9.70
AFA51521-040	4	6	11	57	13.19
AFA51521-050	5	6	13	57	13.19
AFA51521-060	6	6	13	57	13.19
AFA51521-080	8	8	19	63	21.25
AFA51521-100	10	10	22	72	31.96
AFA51521-120	12	12	26	83	44.50
AFA51521-160	16	16	32	92	76.42
AFA51521-200	20	20	38	104	130.28

HU = Carbide uncoated

P	
M	
K	
N	●
S	
H	


● Main application
○ Secondary application



AFA50720-...R...

2 flutes, long design with corner radius

AFA

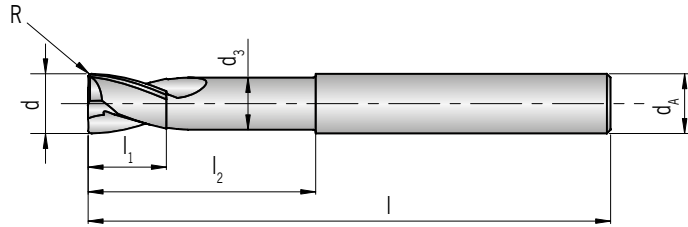

HA

85 - 91

2

R

30°

Ultra micro granulation

Shank DIN 6535HA	d -0,03	d _A h6	d ₃	l ₁	l ₂	l	R	PG 24 / Price in £ HC
								TICN
AFA50720-040R0,3	4	6	3.6	5	10	50	0.3	17.87
AFA50720-060R0,5	6	6	5.4	8	20	60	0.5	17.87
AFA50720-080R0,6	8	8	7.2	10	30	70	0.6	24.76
AFA50720-100R0,8	10	10	9.0	12	36	80	0.8	37.12
AFA50720-120R1,0	12	12	11.0	14	40	90	1.0	57.70
AFA50720-160R1,3	16	16	14.5	18	45	100	1.3	91.80
AFA50720-200R1,6	20	20	18.0	24	45	100	1.6	145.83

HC = Carbide coated



P	
M	
K	
N	●
S	
H	

● Main application
○ Secondary application



AFA51522-...

2 flutes, extra long design

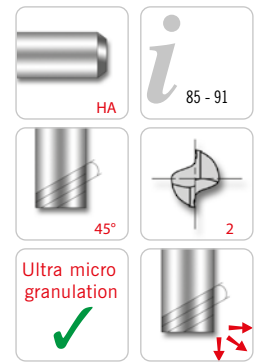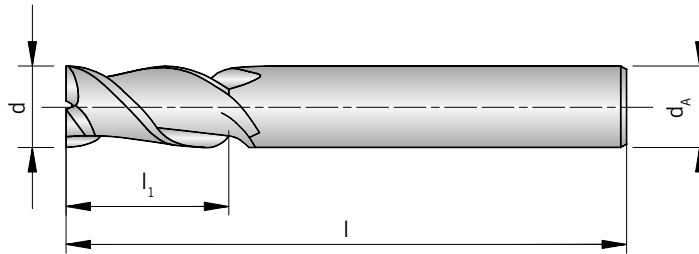

AFA

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TICN
AFA51522-010	1.0	6	3	40	27.54
AFA51522-015	1.5	6	5	40	27.54
AFA51522-020	2.0	6	6	40	27.54
AFA51522-025	2.5	6	8	40	27.54
AFA51522-030	3.0	6	11	50	27.54
AFA51522-040	4.0	6	13	50	27.54
AFA51522-040A	4.0	6	16	70	33.24
AFA51522-050	5.0	6	17	55	29.64
AFA51522-050A	5.0	6	22	70	34.30
AFA51522-060	6.0	6	17	55	29.64
AFA51522-060A	6.0	6	22	70	34.30
AFA51522-070	7.0	8	22	65	36.00
AFA51522-080	8.0	8	22	65	36.00
AFA51522-080A	8.0	8	28	80	38.59
AFA51522-090	9.0	10	27	70	56.68
AFA51522-100	10.0	10	27	70	56.68
AFA51522-100A	10.0	10	32	90	65.46
AFA51522-120	12.0	12	32	80	74.93
AFA51522-120A	12.0	12	38	95	88.38
AFA51522-140	14.0	14	37	85	111.95
AFA51522-160	16.0	16	42	100	149.35
AFA51522-160A	16.0	16	52	110	166.25
AFA51522-180	18.0	16	48	110	206.70
AFA51522-200	20.0	20	48	110	235.98
AFA51522-200A	20.0	20	55	110	246.33

HC = Carbide coated

P	
M	
K	
N	●
S	
H	


● Main application
○ Secondary application



AFA50222-...

2 flutes, extra long design

AFA

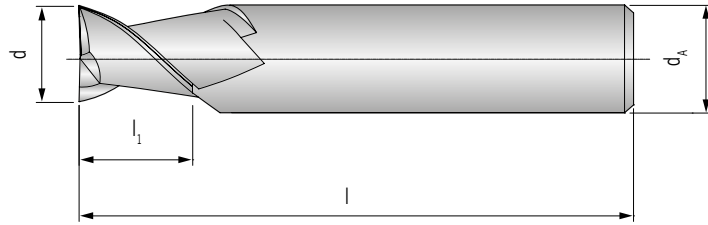

HA	85 - 91
45°	2
Ultra micro granulation	

Shank DIN 6535HA	d -0,015	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TICN
AFA50222-010A	1.0	6	3	50	20.35
AFA50222-010B	1.0	6	6	60	22.98
AFA50222-012A	1.2	6	4	50	20.35
AFA50222-015A	1.5	6	5	50	20.35
AFA50222-015B	1.5	6	8	60	21.05
AFA50222-020A	2.0	6	6	50	18.53
AFA50222-020B	2.0	6	10	60	21.05
AFA50222-025A	2.5	6	8	55	18.53
AFA50222-030A	3.0	6	11	55	18.53
AFA50222-030B	3.0	6	15	65	21.05
AFA50222-040A	4.0	6	13	55	18.53
AFA50222-040B	4.0	6	16	65	21.05
AFA50222-050A	5.0	6	17	55	18.53
AFA50222-050B	5.0	6	22	60	21.05
AFA50222-060A	6.0	6	17	60	21.05
AFA50222-060B	6.0	6	25	70	21.41
AFA50222-070A	7.0	8	22	65	32.37
AFA50222-080A	8.0	8	22	70	33.10
AFA50222-080B	8.0	8	30	80	34.65
AFA50222-100A	10.0	10	27	75	42.70
AFA50222-100B	10.0	10	35	90	50.78
AFA50222-120A	12.0	12	32	80	48.96
AFA50222-120B	12.0	12	40	95	59.07
AFA50222-140A	14.0	16	37	90	97.46
AFA50222-160A	16.0	16	42	100	101.07



Shank DIN 6535HA	d -0,015	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TiCN
AFA50222-160B	16.0	16	52	110	132.36
AFA50222-180A	18.0	16	48	100	115.51
AFA50222-200A	20.0	20	48	100	170.87
AFA50222-200B	20.0	20	55	110	222.60

HC = Carbide coated

P	
M	
K	
N	●
S	
H	

- Main application
- Secondary application


AFA



AFA51836-...

3 flutes, mid-length design

AFA

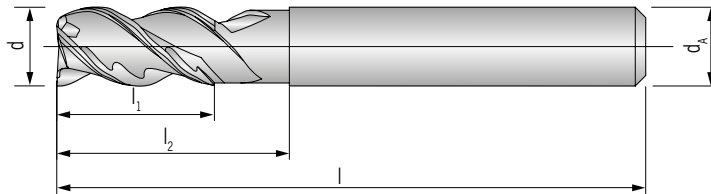

HA

i 85 - 91

45°

3

Ultra micro granulation

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l ₂	l	PG 24 / Price in £ HC
						TICN
AFA51836-060	6	6	13	20	70	24.91
AFA51836-080	8	8	19	26	80	37.42
AFA51836-100	10	10	22	32	80	49.94
AFA51836-120	12	12	26	36	90	63.89
AFA51836-140	14	16	28	40	110	105.40
AFA51836-160	16	16	32	46	120	138.37
AFA51836-180	18	20	35	50	120	180.50
AFA51836-200	20	20	38	52	120	232.24

HC = Carbide coated


P	
M	
K	
N	●
S	
H	

● Main application
○ Secondary application



AFA52336-...

3 flutes, mid-length design, with neck

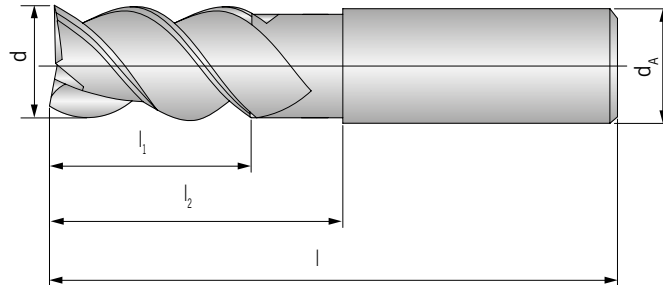

HA

i 85 - 91

45°

3

Ultra micro granulation

AFA

Shank DIN 6535HA	d -0,015	d _A h6	l ₁	l ₂	l	PG 24 / Price in £ HC
						TICN
AFA52336-030	3	6	8	12	57	14.69
AFA52336-040	4	6	11	18	57	19.61
AFA52336-050	5	6	13	18	57	19.61
AFA52336-060	6	6	13	18	57	19.61
AFA52336-080	8	8	21	25	63	30.92
AFA52336-100	10	10	22	30	72	44.40
AFA52336-120	12	12	26	36	83	67.38
AFA52336-160	16	16	36	42	92	106.73
AFA52336-200	20	20	41	52	104	178.08

HC = Carbide coated

P	
M	
K	
N	●
S	
H	


● Main application
○ Secondary application



AFA51531...

3 flutes, long design

AFA

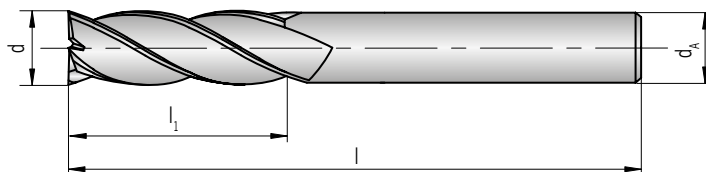

HA

85 - 91

45°

3

Ultra micro granulation

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TICN
AFA51531-030	3	6	11	50	27.54
AFA51531-030A	3	6	14	65	30.16
AFA51531-040	4	6	13	50	27.54
AFA51531-040A	4	6	16	65	30.16
AFA51531-050	5	6	17	55	33.24
AFA51531-050A	5	6	22	70	34.30
AFA51531-060	6	6	17	55	29.64
AFA51531-060A	6	6	22	70	34.30
AFA51531-070	7	8	22	65	36.00
AFA51531-080	8	8	22	65	36.00
AFA51531-080A	8	8	28	80	38.59
AFA51531-090	9	10	27	70	56.68
AFA51531-100	10	10	27	70	56.68
AFA51531-100A	10	10	32	90	65.46
AFA51531-120	12	12	32	80	74.93
AFA51531-120A	12	12	38	95	88.38
AFA51531-140	14	14	37	85	111.95
AFA51531-160	16	16	42	100	149.35
AFA51531-160A	16	16	52	110	166.25
AFA51531-180	18	16	48	110	206.70
AFA51531-200	20	20	48	110	235.98
AFA51531-200A	20	20	55	110	246.33

HC = Carbide coated


P	
M	
K	
N	●
S	
H	

● Main application
○ Secondary application



AFA50231-...R...

3 flutes, long design, with corner radius

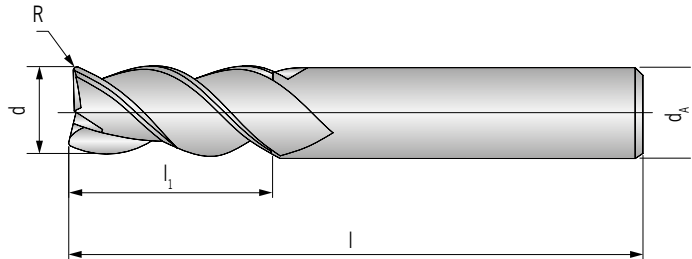

AFA

Shank DIN 6535HA	d -0,015	d _A h6	l ₁	l	R	PG 24 / Price in £ HC
						TICN
AFA50231-030R0,5	3	6	12	57	0.5	12.52
AFA50231-030R1,0	3	6	12	57	1.0	12.52
AFA50231-040R0,5	4	6	15	57	0.5	18.28
AFA50231-040R1,0	4	6	15	57	1.0	18.28
AFA50231-050R0,5	5	6	20	57	0.5	18.28
AFA50231-050R1,0	5	6	20	57	1.0	18.28
AFA50231-060R0,5	6	6	20	65	0.5	21.05
AFA50231-060R1,0	6	6	20	65	1.0	21.05
AFA50231-080R0,5	8	8	22	65	0.5	33.69
AFA50231-080R1,0	8	8	22	65	1.0	33.69
AFA50231-100R0,5	10	10	25	70	0.5	40.91
AFA50231-100R1,0	10	10	25	70	1.0	40.91
AFA50231-100R2,0	10	10	25	70	2.0	40.91
AFA50231-120R0,5	12	12	25	75	0.5	57.76
AFA50231-120R1,0	12	12	25	75	1.0	57.76
AFA50231-120R2,0	12	12	25	75	2.0	57.76
AFA50231-160R0,5	16	16	35	90	0.5	95.06
AFA50231-160R1,0	16	16	35	90	1.0	95.06
AFA50231-160R2,0	16	16	35	90	2.0	95.06
AFA50231-200R0,5	20	20	40	100	0.5	155.23
AFA50231-200R1,0	20	20	40	100	1.0	155.23
AFA50231-200R2,0	20	20	40	100	2.0	155.23

HC = Carbide coated

P	
M	
K	
N	●
S	
H	



● Main application
○ Secondary application



AFA51532-...

3 flutes, extra long design

AFA

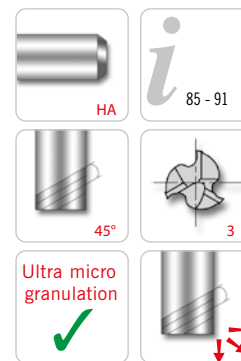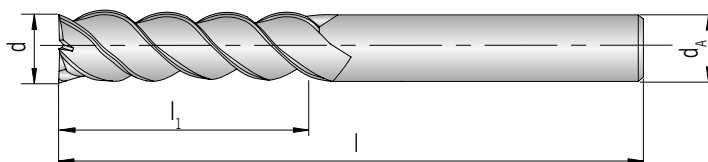

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TICN
AFA51532-030A	3	6	15	65	32.20
AFA51532-030B	3	6	20	70	36.87
AFA51532-030C	3	6	25	75	38.77
AFA51532-040A	4	6	20	70	36.87
AFA51532-040B	4	6	25	75	37.56
AFA51532-040C	4	6	30	80	38.07
AFA51532-050A	5	6	25	70	35.68
AFA51532-050B	5	6	30	75	37.21
AFA51532-050C	5	6	35	80	39.47
AFA51532-060A	6	6	25	70	35.68
AFA51532-060B	6	6	30	75	36.87
AFA51532-060C	6	6	35	80	39.47
AFA51532-060D	6	6	42	90	44.96
AFA51532-080A	8	8	30	80	39.80
AFA51532-080B	8	8	35	85	45.31
AFA51532-080C	8	8	40	90	47.71
AFA51532-080D	8	8	45	95	49.96
AFA51532-100A	10	10	35	90	67.18
AFA51532-100B	10	10	45	100	71.32
AFA51532-100C	10	10	55	110	77.70
AFA51532-100D	10	10	65	120	84.06
AFA51532-120A	12	12	40	95	90.79
AFA51532-120B	12	12	45	100	93.18
AFA51532-120C	12	12	55	110	101.62
AFA51532-120D	12	12	65	120	114.90
AFA51532-120E	12	12	75	135	131.94
AFA51532-120F	12	12	60	110	106.46
AFA51532-160A	16	16	55	120	177.42
AFA51532-160B	16	16	65	135	206.70
AFA51532-160C	16	16	75	150	215.29
AFA51532-160D	16	16	85	160	225.67
AFA51532-160E	16	16	95	180	249.77
AFA51532-160F	16	16	105	190	265.27
AFA51532-160G	16	16	115	200	280.79
AFA51532-200A	20	20	55	125	266.99
AFA51532-200B	20	20	65	140	308.32



Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TICN
AFA51532-200C	20	20	75	150	322.12
AFA51532-200D	20	20	85	160	334.16
AFA51532-200E	20	20	95	180	372.05
AFA51532-200F	20	20	105	190	394.45
AFA51532-200G	20	20	115	200	416.86
AFA51532-200H	20	20	125	220	449.57

HC = Carbide coated

P	
M	
K	
N	●
S	
H	


- Main application
- Secondary application



AFA50232-...

3 flutes, extra long design

AFA

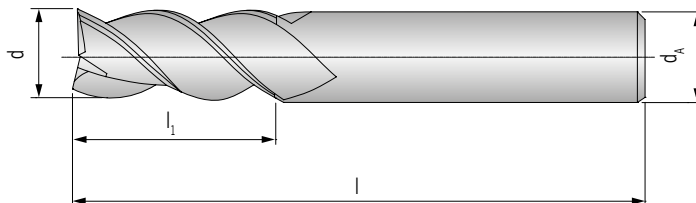

HA

85 - 91

45°

3

Ultra micro granulation

Shank DIN 6535HA	d -0,015	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TICN
AFA50232-010A	1.0	6	3.0	50	20.35
AFA50232-010B	1.0	6	2.0	40	18.65
AFA50232-010C	1.0	6	2.5	40	18.65
AFA50232-010D	1.0	6	4.0	60	22.98
AFA50232-010E	1.0	6	6.0	60	22.98
AFA50232-012A	1.2	6	4.0	50	20.35
AFA50232-015A	1.5	6	5.0	50	20.35
AFA50232-015B	1.5	6	3.0	40	18.65
AFA50232-015C	1.5	6	8.0	60	21.05
AFA50232-015D	1.5	6	10.0	60	21.05
AFA50232-020A	2.0	6	6.0	50	18.53
AFA50232-020B	2.0	6	3.0	40	16.97
AFA50232-020C	2.0	6	8.0	60	21.05
AFA50232-020D	2.0	6	10.0	60	21.05
AFA50232-020E	2.0	6	12.0	60	21.05
AFA50232-025A	2.5	6	10.0	55	18.53
AFA50232-025B	2.5	6	8.0	40	16.97
AFA50232-025C	2.5	6	12.0	60	21.05
AFA50232-030A	3.0	6	11.0	55	18.53
AFA50232-030B	3.0	6	4.0	45	16.00
AFA50232-030C	3.0	6	8.0	45	16.97
AFA50232-030D	3.0	6	15.0	65	21.05
AFA50232-030E	3.0	6	20.0	70	21.41
AFA50232-030F	3.0	6	25.0	75	21.41
AFA50232-030G	3.0	6	30.0	80	21.89
AFA50232-035A	3.5	6	12.0	55	18.53
AFA50232-040A	4.0	6	13.0	55	18.53
AFA50232-040B	4.0	6	5.0	45	16.00
AFA50232-040C	4.0	6	11.0	45	16.97
AFA50232-040D	4.0	6	16.0	65	21.05
AFA50232-040E	4.0	6	20.0	70	21.41
AFA50232-040F	4.0	6	26.0	75	21.41
AFA50232-040G	4.0	6	30.0	80	21.89
AFA50232-045A	4.5	6	15.0	55	18.53
AFA50232-050A	5.0	6	17.0	55	18.53
AFA50232-050B	5.0	6	6.0	45	16.00



Shank DIN 6535HA	d -0,015	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TiCN
AFA50232-050C	5.0	6	22.0	60	21.05
AFA50232-050D	5.0	6	25.0	70	21.41
AFA50232-050E	5.0	6	30.0	75	21.41
AFA50232-050F	5.0	6	35.0	80	21.89
AFA50232-050G	5.0	6	40.0	85	25.15
AFA50232-050H	5.0	6	45.0	90	26.36
AFA50232-055A	5.5	6	17.0	55	18.53
AFA50232-060A	6.0	6	17.0	60	21.05
AFA50232-060B	6.0	6	7.0	50	17.81
AFA50232-060C	6.0	6	13.0	50	18.53
AFA50232-060D	6.0	6	22.0	60	21.05
AFA50232-060E	6.0	6	25.0	70	21.41
AFA50232-060F	6.0	6	30.0	75	21.41
AFA50232-060G	6.0	6	35.0	80	21.89
AFA50232-060H	6.0	6	42.0	90	26.36
AFA50232-060I	6.0	6	50.0	100	26.95
AFA50232-070A	7.0	8	22.0	65	32.37
AFA50232-080A	8.0	8	22.0	70	33.10
AFA50232-080B	8.0	8	9.0	60	27.79
AFA50232-080C	8.0	8	19.0	60	29.24
AFA50232-080D	8.0	8	28.0	80	34.65
AFA50232-080E	8.0	8	30.0	80	34.65
AFA50232-080F	8.0	8	35.0	85	40.19
AFA50232-080G	8.0	8	40.0	90	41.76
AFA50232-080H	8.0	8	45.0	95	41.76
AFA50232-080I	8.0	8	50.0	100	42.48
AFA50232-080J	8.0	8	55.0	105	42.60
AFA50232-080K	8.0	8	65.0	110	51.27
AFA50232-090A	9.0	10	27.0	70	42.60
AFA50232-100A	10.0	10	27.0	75	42.70
AFA50232-100B	10.0	10	11.0	65	40.67
AFA50232-100C	10.0	10	22.0	65	42.60
AFA50232-100D	10.0	10	32.0	90	50.78
AFA50232-100E	10.0	10	35.0	90	50.78
AFA50232-100F	10.0	10	40.0	90	52.58
AFA50232-100G	10.0	10	45.0	100	52.71
AFA50232-100H	10.0	10	50.0	100	52.71
AFA50232-100I	10.0	10	55.0	110	66.17
AFA50232-100J	10.0	10	60.0	110	66.17
AFA50232-100K	10.0	10	65.0	120	68.59
AFA50232-120A	12.0	12	32.0	80	48.96
AFA50232-120B	12.0	12	13.0	70	46.68
AFA50232-120C	12.0	12	26.0	70	48.50
AFA50232-120D	12.0	12	40.0	95	59.07
AFA50232-120E	12.0	12	45.0	100	61.37
AFA50232-120F	12.0	12	50.0	100	61.37
AFA50232-120G	12.0	12	55.0	110	79.42
AFA50232-120H	12.0	12	60.0	110	79.42
AFA50232-120I	12.0	12	65.0	120	81.83
AFA50232-120J	12.0	12	70.0	120	81.83
AFA50232-120K	12.0	12	75.0	135	81.83
AFA50232-140A	14.0	16	37.0	90	97.46
AFA50232-160A	16.0	16	18.0	90	95.06
AFA50232-160B	16.0	16	32.0	90	97.46
AFA50232-160C	16.0	16	42.0	100	101.07
AFA50232-160D	16.0	16	52.0	105	103.48
AFA50232-160E	16.0	16	55.0	110	132.36
AFA50232-160F	16.0	16	65.0	130	135.96

AFA



AFA

Shank DIN 6535HA	d -0,015	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TICN
AFA50232-160G	16.0	16	75.0	150	139.58
AFA50232-160H	16.0	16	85.0	160	141.98
AFA50232-160I	16.0	16	95.0	180	156.43
AFA50232-160J	16.0	16	105.0	190	166.05
AFA50232-160K	16.0	16	115.0	200	170.87
AFA50232-180A	18.0	16	48.0	100	115.51
AFA50232-200A	20.0	20	22.0	90	160.03
AFA50232-200B	20.0	20	38.0	90	166.05
AFA50232-200C	20.0	20	48.0	100	170.87
AFA50232-200D	20.0	20	55.0	110	222.60
AFA50232-200E	20.0	20	65.0	130	228.62
AFA50232-200F	20.0	20	75.0	150	234.62
AFA50232-200G	20.0	20	85.0	160	239.44
AFA50232-200H	20.0	20	95.0	180	268.33
AFA50232-200I	20.0	20	105.0	190	282.78
AFA50232-200J	20.0	20	115.0	200	297.21
AFA50232-200K	20.0	20	125.0	220	399.48


HC = Carbide coated

P	
M	
K	
N	●
S	
H	

- Main application
- Secondary application



AFA51831-...
3 flutes, short design

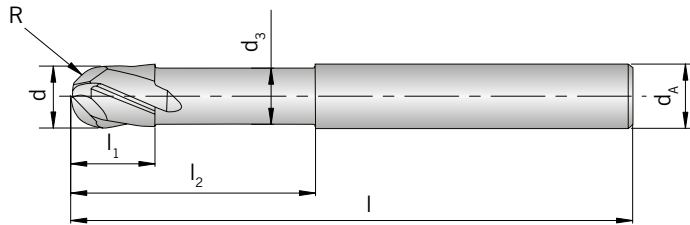

HA

i 85 - 91

40°

3

Ultra micro granulation

AFA

Shank DIN 6535HA	d -0,03	d _A h6	d ₃	l ₁	l ₂	l	R ±0,01	PG 24 / Price in £ HC
								TCN
AFA51831-020	2.0	6	1.9	3.0	5.0	60	1.00	21.58
AFA51831-025	2.5	6	2.4	4.0	6.0	60	1.25	21.58
AFA51831-030	3.0	6	2.8	4.5	6.5	60	1.50	21.58
AFA51831-035	3.5	6	3.2	5.0	7.0	65	1.75	21.58
AFA51831-040	4.0	6	3.7	6.0	8.0	65	2.00	21.58
AFA51831-050	5.0	6	4.6	7.5	10.0	65	2.50	21.58
AFA51831-060	6.0	6	5.6	9.0	12.0	75	3.00	21.58
AFA51831-080	8.0	8	7.4	12.0	25.0	75	4.00	32.61
AFA51831-100	10.0	10	9.4	15.0	30.0	80	5.00	48.50
AFA51831-120	12.0	12	11.4	18.0	36.0	90	6.00	67.72
AFA51831-160	16.0	16	15.4	24.0	40.0	100	8.00	99.04
AFA51831-200	20.0	20	18.0	30.0	50.0	110	10.00	165.54

HC = Carbide coated

P	
M	
K	
N	●
S	
H	


● Main application
○ Secondary application



AFA61431-...

3 flutes, long design, uncoated

AFA

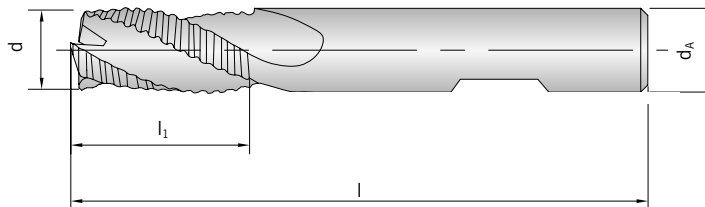

HB

85 - 91

30°

3

Ultra micro granulation

Shank DIN 6535HB	d h10	d _A h6	l ₁	l	PG 24 / Price in £
					PG 24 / Price in £ HU
AFA61431-060	6	6	16	57	23.35
AFA61431-070	7	8	16	63	25.20
AFA61431-080	8	8	16	63	25.20
AFA61431-090	9	10	19	72	40.15
AFA61431-100	10	10	22	72	40.15
AFA61431-120	12	12	26	83	52.98
AFA61431-140	14	14	26	83	65.35
AFA61431-160	16	16	32	92	89.73
AFA61431-180	18	18	32	92	115.06
AFA61431-200	20	20	38	104	140.99
AFA61431-250	25	25	45	121	263.46

HU = Carbide uncoated


P	
M	
K	
N	●
S	
H	

● Main application
○ Secondary application



AFA51431-...

3 flutes, long design

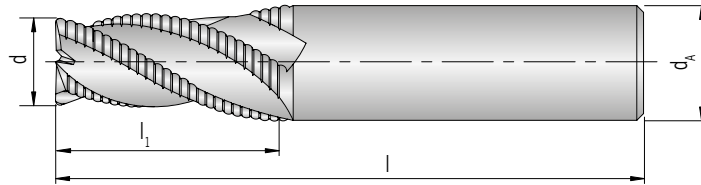

HA	i 85 - 91
30°	3
Ultra micro granulation ✓	

AFA

Shank DIN 6535HA	d <i>js12</i>	d _A <i>h6</i>	l ₁	l	PG 24 / Price in £ HC
					TICN
AFA51431-060	6	6	16	57	31.02
AFA51431-070	7	8	16	63	33.78
AFA51431-080	8	8	16	63	33.78
AFA51431-090	9	10	19	72	52.54
AFA51431-100	10	10	22	72	52.54
AFA51431-120	12	12	26	83	71.65
AFA51431-140	14	14	26	83	91.99
AFA51431-160	16	16	32	92	123.16
AFA51431-180	18	18	32	92	161.22
AFA51431-200	20	20	38	104	191.19
AFA51431-250	25	25	45	121	342.78

HC = Carbide coated

P	
M	
K	
N	●
S	
H	


● Main application
○ Secondary application



AFA52131-...

3 flutes, long design

AFA

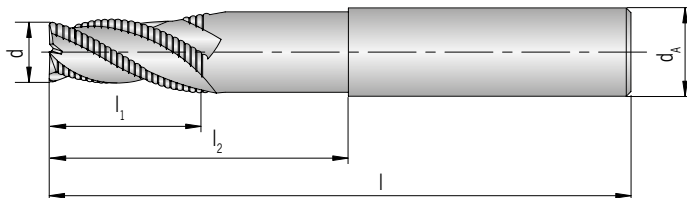

HA

i 85 - 91

42°

3

Ultra micro granulation

Shank DIN 6535HA	d <i>js12</i>	d _A <i>h6</i>	l ₁	l ₂	l	PG 24 / Price in £ HC
						TICN
AFA52131-040A	4	6	6	14	60	40.13
AFA52131-060A	6	6	10	20	65	40.13
AFA52131-060B	6	6	18	-	60	40.13
AFA52131-060C	6	6	30	-	70	47.52
AFA52131-070A	7	8	20	-	65	45.81
AFA52131-080A	8	8	12	26	80	46.34
AFA52131-080B	8	8	20	-	65	45.81
AFA52131-080C	8	8	30	-	100	54.95
AFA52131-100A	10	10	14	30	85	74.41
AFA52131-100B	10	10	26	-	70	67.52
AFA52131-100C	10	10	40	-	100	90.44
AFA52131-120A	12	12	16	36	100	90.60
AFA52131-120B	12	12	30	-	80	81.14
AFA52131-120C	12	12	50	-	120	114.71
AFA52131-160A	16	16	20	42	110	160.20
AFA52131-160B	16	16	40	-	100	153.30
AFA52131-160C	16	16	56	-	120	192.91
AFA52131-200A	20	20	24	52	110	249.77
AFA52131-200B	20	20	46	-	100	241.14
AFA52131-200C	20	20	60	-	120	304.91

HC = Carbide coated



P	
M	
K	
N	●
S	
H	

● Main application
○ Secondary application



AFA51931-...

3 flutes, long design

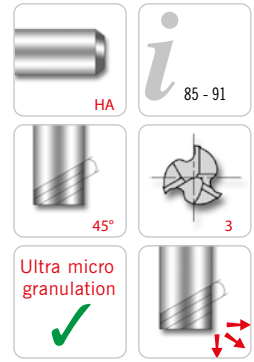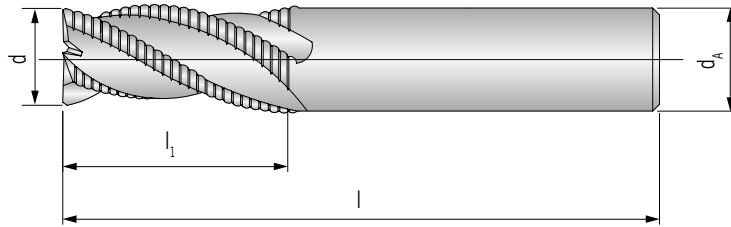

AFA

Shank DIN 6535HA	d h10	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TICN
AFA51931-040	4	6	10	55	40.42
AFA51931-050	5	6	15	55	40.42
AFA51931-060	6	6	15	60	40.42
AFA51931-060A	6	6	25	80	47.17
AFA51931-080	8	8	20	65	47.17
AFA51931-080A	8	8	30	90	56.68
AFA51931-100	10	10	25	70	67.38
AFA51931-100A	10	10	40	100	81.46
AFA51931-120	12	12	30	80	76.41
AFA51931-120A	12	12	50	110	105.89
AFA51931-140	14	16	35	90	145.59
AFA51931-160	16	16	42	100	151.61
AFA51931-160A	16	16	52	150	193.72
AFA51931-180	18	20	45	100	232.24
AFA51931-200	20	20	48	100	234.62
AFA51931-200A	20	20	55	160	298.41

HC = Carbide coated

P	
M	
K	
N	●
S	
H	


● Main application
○ Secondary application



AFA52331-...

3 flutes, long design, with neck

AFA

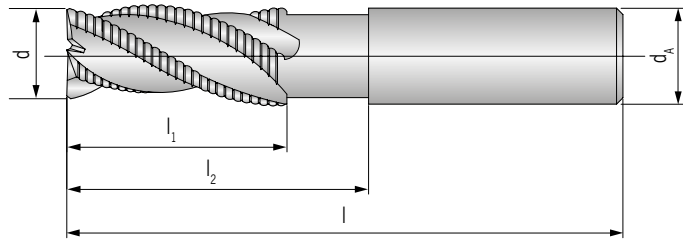

HA

i 85 - 91

45°

3

Ultra micro granulation

Shank DIN 6535HA	d h10	d _A h6	l ₁	l ₂	l	PG 24 / Price in £ HC
						TICN
AFA52331-040	4	6	6	12	60	43.92
AFA52331-050	5	6	7	20	60	43.92
AFA52331-060	6	6	8	20	70	45.36
AFA52331-080	8	8	10	26	80	50.66
AFA52331-100	10	10	12	32	90	73.88
AFA52331-120	12	12	14	36	100	84.94
AFA52331-160	16	16	18	46	120	181.70
AFA52331-200	20	20	22	52	120	277.96

HC = Carbide coated

P	
M	
K	
N	●
S	
H	

● Main application
○ Secondary application



Material group	Structure of the material groups and identification letters		Brinell hardness HB	Tensile strength Rm (N/mm ²)	Chipping group	Correction factor	Cutting speed V _c (m/min)		
							AK1010	VHM TiCN	
P	Unalloyed steel	C ≤ 0.25 % annealed	125	428	P1		-	-	
		C > 0.25 ... ≤ 0.55 % annealed	190	639	P2		-	-	
		C > 0.25 ... ≤ 0.55 % hardened and tempered	210	708	P3		-	-	
		C > 0.55 % annealed	190	639	P4		-	-	
		C > 0.55 % hardened and tempered	300	1013	P5		-	-	
		Machining steel (short-chipping) tempered	220	745	P6		-	-	
	Low alloyed steel	annealed	175	591	P7		-	-	
		hardened and tempered	300	1013	P8		-	-	
		hardened and tempered	380	1282	P9		-	-	
		hardened and tempered	430	1477	P10		-	-	
	High alloyed steel and high alloyed tool steel	annealed	200	675	P11		-	-	
		hardened	300	1013	P12		-	-	
		hardened	400	1361	P13		-	-	
	Stainless steel	ferritic / martensitic, annealed	200	675	P14		-	-	
		martensitic, hardened and tempered	330	1114	P15		-	-	
M	Stainless steel	austenitic, chilled	200	675	M1		-	-	
		austenitic, precipitation-hardened (PH)	300	1013	M2		-	-	
		austenitic-ferritic, Duplex	230	778	M3		-	-	
K	Malleable cast iron	ferritic	200	675	K1		-	-	
		pearlitic	260	867	K2		-	-	
	Cast iron	low tensile strength	180	602	K3		-	-	
		high tensile strength / austenitic	245	825	K4		-	-	
	Cast iron with nodular graphite	ferritic	155	518	K5		-	-	
		pearlitic	265	885	K6		-	-	
	GGV (CGI)		200	675	K7		-	-	
N	Aluminium alloys long chipping	not heat treatable	30	-	N1	1,9	280 - 430 - 580	280 - 430 - 580	
		heat treatable, heat treated	100	343	N2	1,8	220 - 350 - 480	220 - 350 - 480	
	Casted aluminium alloys	≤ 12 % Si, not heat treatable	75	260	N3	1,9	280 - 405 - 530	280 - 405 - 530	
		≤ 12 % Si, aushärtbar, ausgehärtet	90	314	N4	1,7	170 - 265 - 360	170 - 265 - 360	
		> 12 % Si, not heat treatable	130	447	N5	1,6	120 - 200 - 280	120 - 200 - 280	
	Magnesium alloys		70	250	N6	1,8	150 - 185 - 220	150 - 185 - 220	
	Copper and copper alloys (Brass / Bronze)	Unalloyed, elektrolyte copper	100	343	N7	1,2	100 - 170 - 240	100 - 170 - 240	
		Brass, Bronze	90	314	N8	1,1	100 - 175 - 250	100 - 175 - 250	
		Cu-alloys, short-chipping	110	382	N9	1,1	90 - 155 - 220	90 - 155 - 220	
		High-tensile, Ampco	300	1013	N10	0,7	70 - 125 - 180	70 - 125 - 180	
	Non-ferrous materials	Lead alloys (without abrasive filling material)	-	-	N11	1,9	70 - 105 - 140	70 - 105 - 140	
		Duroplastic (without abrasive filling material)	-	-	N12	1,9	120 - 185 - 250	120 - 185 - 250	
		Plastic glas fibre reinforced GFRP	-	-	N13	1,0	50 - 95 - 140	50 - 95 - 140	
		Plastic carbon fibre reinforced CFRP	-	-	N14	1,0	50 - 95 - 140	50 - 95 - 140	
		Plastic aramid fibre reinforced AFRP	-	-	N15	1,0	50 - 95 - 140	50 - 95 - 140	
Graphite (tech.)			80 Shore	-	N16		-	-	
S	High temperature resistant alloys	Fe-Basis	annealed	200	675	S1		-	-
			heat treated	280	943	S2		-	-
		Ni- or Co-alloyed	annealed	250	839	S3		-	-
			heat treated	350	1177	S4		-	-
			casting	320	1076	S5		-	-
	Titanium alloys	Pure titan	200	675	S6		-	-	
		α- and β-alloys, heat treated	375	1262	S7		-	-	
		β-alloys	410	1396	S8		-	-	
	Wolfram alloys		300	1013	S9		-	-	
	Molybdän alloys		300	1013	S10		-	-	
H	Hardened steel	hardened	50 HRC	-	H1		-	-	
		hardened	55 HRC	-	H2		-	-	
		hardened	60 HRC	-	H3		-	-	
	Hardened cast iron	hardened	55 HRC	-	H4		-	-	

The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.



For the following feed tables the values must be corrected depending on the material being machined in line with the correction factor.

An example using a cutter with $\varnothing 6$ mm is detailed:

V_c -table

ISO	Material	Strength [N/mm ² - HB]	Kf [x f _z]	TiAlN V _c [m/min]
P	General construction steel	< 800 N/mm ²	1,2	100 - 150
	Free cutting steel	< 800 N/mm ²	1,2	100 - 150
	Case hardened steel, non alloyed	< 800 N/mm ²	1,2	100 - 150
	Alloyed case hardened steel	< 1000 N/mm ²	1	90 - 120
	Tempering steel, non alloyed	< 850 N/mm ²	1,2	90 - 130
	Tempering steel, non alloyed	< 1000 N/mm ²	1	60 - 90
	Tempering steel, alloyed	< 800 N/mm ²	1,2	90 - 120
	Tempering steel, alloyed	< 1300 N/mm ²	0,8	60 - 80
	Steel castings	< 850 N/mm ²	1,2	70 - 100

f_z-table

Ø d ₁ [mm]	Correction factor		
	1	0,7	0,8
1	0,004	0,003	0,003
2	0,008	0,006	0,006
3	0,012	0,008	0,010
4	0,016	0,011	0,013
5	0,020	0,014	0,016
6	0,024	0,017	0,019
8	0,032	0,022	0,026

For case-hardening alloy steel the feed value from the table is valid: $Kf(f_z) = 1$ (according to 100%) $f_z = 0,024$
 For heat treatable steel alloys < 1300 N/mm² the feed value from the table is reduced by 20%.
 $Kf(fz) = 0,8$ (according to 80%) $fz = 0,019$

General rule:

Feed per tooth:

$$= f_z \cdot Kf(f_z)$$


For axial plunge milling:

$$= \text{Table value} / \text{Number of teeth}$$




Feed per tooth with radial depth of cut from 0,2 – 0,3 mm

Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,004	0,003	0,003	0,004	0,004	0,005	0,006	0,006	0,007	0,008
2	0,008	0,006	0,006	0,007	0,009	0,010	0,012	0,013	0,014	0,015
3	0,012	0,008	0,010	0,011	0,013	0,014	0,018	0,019	0,022	0,023
4	0,016	0,011	0,013	0,014	0,018	0,019	0,024	0,026	0,029	0,030
5	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
6	0,024	0,017	0,019	0,022	0,026	0,029	0,036	0,038	0,043	0,046
8	0,032	0,022	0,026	0,029	0,035	0,038	0,048	0,051	0,058	0,061
10	0,040	0,028	0,032	0,036	0,044	0,048	0,060	0,064	0,072	0,076
12	0,048	0,034	0,038	0,043	0,053	0,058	0,072	0,077	0,086	0,091
14	0,056	0,039	0,045	0,050	0,062	0,067	0,084	0,090	0,101	0,106
16	0,064	0,045	0,051	0,058	0,070	0,077	0,096	0,102	0,115	0,122
18	0,072	0,050	0,058	0,065	0,079	0,086	0,108	0,115	0,130	0,137
20	0,080	0,056	0,064	0,072	0,088	0,096	0,120	0,128	0,144	0,152
25	0,100	0,070	0,080	0,090	0,110	0,120	0,150	0,160	0,180	0,190

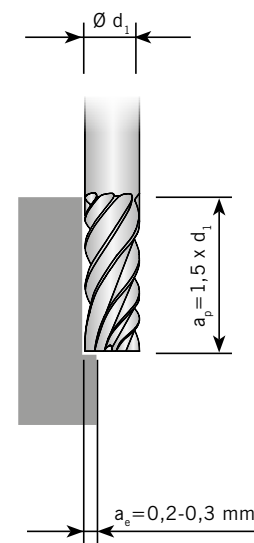

Feed per tooth with radial depth of cut of 10% of the cutter (Ø d₁)

Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,003	0,002	0,002	0,003	0,003	0,004	0,005	0,005	0,005	0,006
2	0,008	0,006	0,006	0,007	0,009	0,010	0,012	0,013	0,014	0,015
3	0,012	0,008	0,010	0,011	0,013	0,014	0,018	0,019	0,022	0,023
4	0,014	0,010	0,011	0,013	0,015	0,017	0,021	0,022	0,025	0,027
5	0,017	0,012	0,014	0,015	0,019	0,020	0,026	0,027	0,031	0,032
6	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
8	0,027	0,019	0,022	0,024	0,030	0,032	0,041	0,043	0,049	0,051
10	0,033	0,023	0,026	0,030	0,036	0,040	0,050	0,053	0,059	0,063
12	0,040	0,028	0,032	0,036	0,044	0,048	0,060	0,064	0,072	0,076
14	0,047	0,033	0,038	0,042	0,052	0,056	0,071	0,075	0,085	0,089
16	0,053	0,037	0,042	0,048	0,058	0,064	0,080	0,085	0,095	0,101
18	0,060	0,042	0,048	0,054	0,066	0,072	0,090	0,096	0,108	0,114
20	0,067	0,047	0,054	0,060	0,074	0,080	0,101	0,107	0,121	0,127
25	0,083	0,058	0,066	0,075	0,091	0,100	0,125	0,133	0,149	0,158

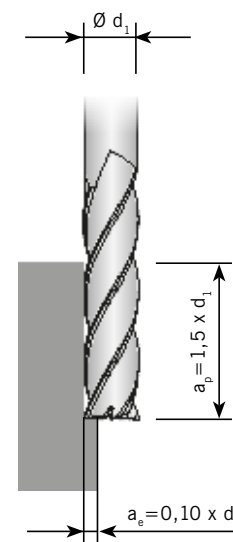


Attention: Take the correction factor from the table "Cutting speeds".
Correction factor -> 1,1 with $a_p = 1 \times d_1$ -> 1,2 with $a_p = 0,5 \times d_1$


AFA


Feed per tooth with radial depth of cut of 20% of the cutter ($\varnothing d_1$)

$\varnothing d_1$ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,002	0,001	0,001	0,001	0,002	0,002	0,003	0,003	0,003	0,003
2	0,005	0,003	0,004	0,004	0,005	0,006	0,007	0,008	0,009	0,009
3	0,008	0,005	0,006	0,007	0,008	0,009	0,012	0,012	0,014	0,015
4	0,010	0,007	0,008	0,009	0,011	0,012	0,015	0,016	0,018	0,019
5	0,013	0,009	0,010	0,011	0,014	0,015	0,019	0,020	0,023	0,024
6	0,015	0,010	0,012	0,013	0,016	0,018	0,022	0,024	0,027	0,028
8	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
10	0,025	0,017	0,020	0,022	0,027	0,030	0,037	0,040	0,045	0,047
12	0,030	0,021	0,024	0,027	0,033	0,036	0,045	0,048	0,054	0,057
14	0,035	0,024	0,028	0,031	0,038	0,042	0,052	0,056	0,063	0,066
16	0,040	0,028	0,032	0,036	0,044	0,048	0,060	0,064	0,072	0,076
18	0,045	0,031	0,036	0,040	0,049	0,054	0,067	0,072	0,081	0,085
20	0,050	0,035	0,040	0,045	0,055	0,060	0,075	0,080	0,090	0,095
25	0,063	0,044	0,050	0,056	0,069	0,075	0,094	0,100	0,113	0,119

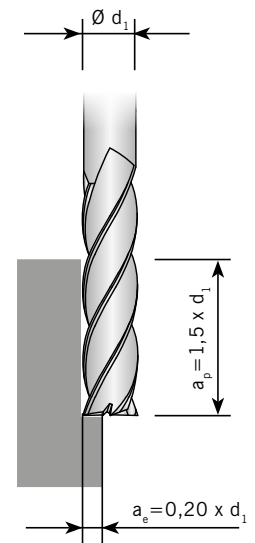
Feed per tooth with radial depth of cut of 40% of the cutter ($\varnothing d_1$)

$\varnothing d_1$ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,001	0,002	0,002	0,002	0,003
2	0,004	0,002	0,003	0,003	0,004	0,004	0,006	0,006	0,007	0,007
3	0,006	0,004	0,005	0,005	0,007	0,007	0,009	0,010	0,011	0,012
4	0,008	0,005	0,006	0,007	0,008	0,009	0,012	0,012	0,014	0,015
5	0,010	0,007	0,008	0,009	0,011	0,012	0,015	0,016	0,018	0,019
6	0,012	0,008	0,009	0,010	0,013	0,014	0,018	0,019	0,021	0,022
8	0,016	0,011	0,012	0,014	0,017	0,019	0,024	0,025	0,028	0,030
10	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
12	0,024	0,016	0,019	0,021	0,026	0,028	0,036	0,038	0,043	0,045
14	0,028	0,019	0,022	0,025	0,030	0,033	0,042	0,044	0,050	0,053
16	0,032	0,022	0,025	0,028	0,035	0,038	0,048	0,051	0,057	0,060
18	0,036	0,025	0,028	0,032	0,039	0,043	0,054	0,057	0,064	0,068
20	0,040	0,028	0,032	0,036	0,044	0,048	0,060	0,064	0,072	0,076
25	0,050	0,035	0,040	0,045	0,055	0,060	0,075	0,080	0,090	0,095

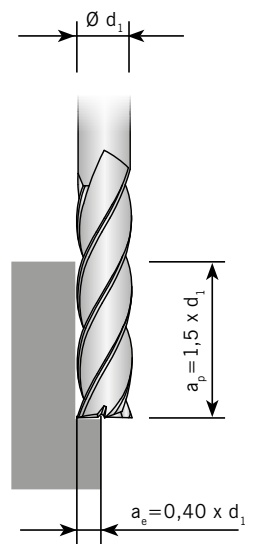


Attention: Take the correction factor from the table "Cutting speeds".
Correction factor -> 1,1 with $a_p = 1 \times d_1$ -> 1,2 with $a_p = 0,5 \times d_1$




Feed per tooth with radial depth of cut of 60% of the cutter (ϕd_1)

ϕd_1 [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,002	0,002	0,002
2	0,003	0,002	0,002	0,002	0,003	0,003	0,004	0,005	0,005	0,006
3	0,005	0,003	0,004	0,004	0,005	0,006	0,007	0,008	0,009	0,009
4	0,006	0,004	0,005	0,005	0,007	0,007	0,009	0,010	0,011	0,012
5	0,008	0,005	0,006	0,007	0,009	0,010	0,012	0,013	0,015	0,016
6	0,009	0,006	0,007	0,008	0,010	0,011	0,014	0,015	0,017	0,018
8	0,013	0,009	0,010	0,011	0,014	0,015	0,019	0,020	0,023	0,024
10	0,016	0,011	0,013	0,014	0,017	0,019	0,024	0,026	0,029	0,030
12	0,019	0,013	0,015	0,017	0,021	0,023	0,029	0,031	0,035	0,037
14	0,022	0,015	0,018	0,020	0,025	0,027	0,034	0,036	0,040	0,043
16	0,026	0,018	0,020	0,023	0,028	0,031	0,039	0,041	0,046	0,049
18	0,029	0,020	0,023	0,026	0,032	0,035	0,043	0,046	0,052	0,055
20	0,032	0,022	0,026	0,029	0,035	0,039	0,048	0,052	0,058	0,061
25	0,040	0,028	0,032	0,036	0,045	0,049	0,061	0,065	0,073	0,077

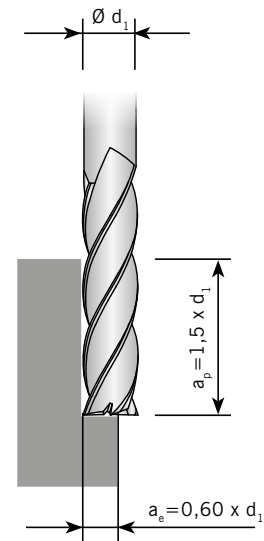

Feed per tooth with radial depth of cut of 80% of the cutter (ϕd_1)

ϕd_1 [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001
2	0,002	0,001	0,002	0,002	0,002	0,003	0,003	0,004	0,004	0,004
3	0,004	0,002	0,003	0,003	0,004	0,004	0,006	0,006	0,007	0,007
4	0,005	0,003	0,004	0,004	0,005	0,006	0,007	0,008	0,009	0,009
5	0,006	0,004	0,005	0,005	0,007	0,007	0,009	0,010	0,011	0,012
6	0,007	0,005	0,006	0,006	0,008	0,009	0,011	0,012	0,013	0,014
8	0,010	0,007	0,008	0,009	0,011	0,012	0,015	0,016	0,018	0,019
10	0,012	0,008	0,010	0,011	0,013	0,015	0,018	0,020	0,022	0,023
12	0,015	0,010	0,012	0,013	0,016	0,018	0,022	0,024	0,027	0,028
14	0,017	0,012	0,014	0,015	0,019	0,021	0,026	0,028	0,031	0,033
16	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
18	0,022	0,015	0,018	0,020	0,024	0,027	0,033	0,036	0,040	0,042
20	0,025	0,017	0,020	0,022	0,027	0,030	0,037	0,040	0,045	0,047
25	0,031	0,022	0,025	0,028	0,034	0,037	0,047	0,050	0,056	0,059

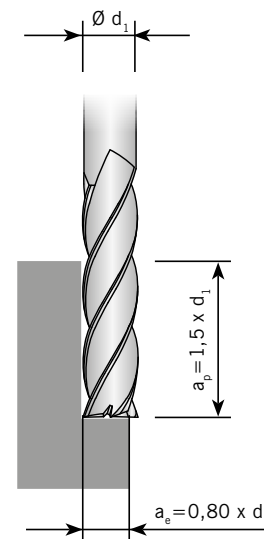


Attention: Take the correction factor from the table "Cutting speeds".
 Correction factor \rightarrow 1,1 with $a_p = 1 \times d_1 \rightarrow$ 1,2 with $a_p = 0,5 \times d_1$




Feed per tooth when full slot milling → $a_p = 0,5 \times d_1$

$\varnothing d_1$ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,002	0,001	0,001	0,001	0,002	0,002	0,003	0,003	0,003	0,003
2	0,004	0,002	0,003	0,003	0,004	0,004	0,006	0,006	0,007	0,007
3	0,007	0,004	0,005	0,006	0,007	0,008	0,010	0,011	0,012	0,013
4	0,009	0,006	0,007	0,008	0,009	0,010	0,013	0,014	0,016	0,017
5	0,011	0,007	0,008	0,009	0,012	0,013	0,016	0,017	0,019	0,020
6	0,013	0,009	0,010	0,011	0,014	0,015	0,019	0,020	0,023	0,024
8	0,018	0,012	0,014	0,016	0,019	0,021	0,027	0,028	0,032	0,034
10	0,022	0,015	0,017	0,019	0,024	0,026	0,033	0,035	0,039	0,041
12	0,030	0,021	0,024	0,027	0,033	0,036	0,045	0,048	0,054	0,057
14	0,032	0,022	0,025	0,028	0,035	0,038	0,048	0,051	0,057	0,060
16	0,036	0,025	0,028	0,032	0,039	0,043	0,054	0,057	0,064	0,068
18	0,042	0,029	0,033	0,037	0,046	0,050	0,063	0,067	0,075	0,079
20	0,045	0,031	0,036	0,040	0,049	0,054	0,067	0,072	0,081	0,085
25	0,056	0,039	0,044	0,050	0,061	0,067	0,084	0,089	0,100	0,106

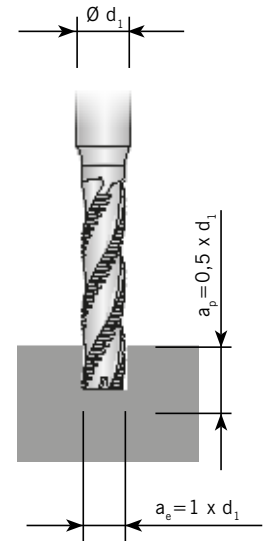

Feed per tooth when full slot milling → $a_p = 1 \times d_1$

$\varnothing d_1$ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,002	0,002	0,002	0,002	0,002
2	0,003	0,002	0,002	0,002	0,003	0,003	0,004	0,004	0,005	0,005
3	0,005	0,003	0,004	0,004	0,005	0,005	0,007	0,007	0,008	0,009
4	0,006	0,004	0,005	0,005	0,006	0,007	0,009	0,009	0,011	0,011
5	0,007	0,005	0,006	0,006	0,008	0,009	0,011	0,011	0,013	0,014
6	0,008	0,006	0,007	0,008	0,009	0,010	0,013	0,014	0,015	0,016
8	0,012	0,008	0,009	0,011	0,013	0,014	0,018	0,019	0,021	0,022
10	0,014	0,010	0,011	0,013	0,016	0,017	0,021	0,023	0,026	0,027
12	0,020	0,014	0,016	0,018	0,021	0,023	0,029	0,031	0,035	0,037
14	0,021	0,015	0,017	0,019	0,023	0,025	0,031	0,033	0,037	0,040
16	0,023	0,016	0,019	0,021	0,026	0,028	0,035	0,037	0,042	0,044
18	0,027	0,019	0,022	0,025	0,030	0,033	0,041	0,044	0,049	0,052
20	0,029	0,020	0,023	0,026	0,032	0,035	0,044	0,047	0,053	0,056
25	0,036	0,025	0,029	0,033	0,040	0,044	0,055	0,058	0,066	0,069

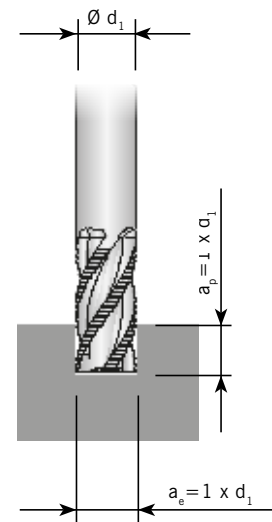

Attention: Feed rates are reduced by 10-20% for uncoated tools.

AFA




Feed rates for ball nosed- and High feed cutters

Ball nose end milling cutters		Ball nose end milling cutters		Ball nose cutter for mold and die production		Torus end milling cutters		Torus end milling cutters	
d_1 [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]
2	0,015	0,010	0,005	0,010	0,015	0,010	0,015	0,015	0,020
3	0,030	0,020	0,015	0,015	0,020	0,015	0,020	0,020	0,030
4	0,040	0,030	0,030	0,020	0,030	0,020	0,030	0,030	0,040
5	0,060	0,050	0,050	0,030	0,040	0,030	0,040	0,040	0,060
6	0,070	0,060	0,060	0,050	0,060	0,050	0,060	0,060	0,080
8	0,100	0,080	0,070	0,070	0,080	0,070	0,080	0,080	0,100
10	0,120	0,100	0,080	0,080	0,100	0,080	0,100	0,100	0,120
12	0,150	0,120	0,090	0,100	0,120	0,100	0,120	0,120	0,150
16	0,180	0,150	0,100	0,120	0,150	0,120	0,150	0,150	0,180
18	0,200	0,180	0,110	0,140	0,160	0,140	0,160	0,160	0,180
20	0,220	0,200	0,120	0,150	0,180	0,150	0,180	0,180	0,200
25	0,240	0,220	0,140	0,160	0,200	0,160	0,200	0,200	0,240

For more information see

www.arno.de

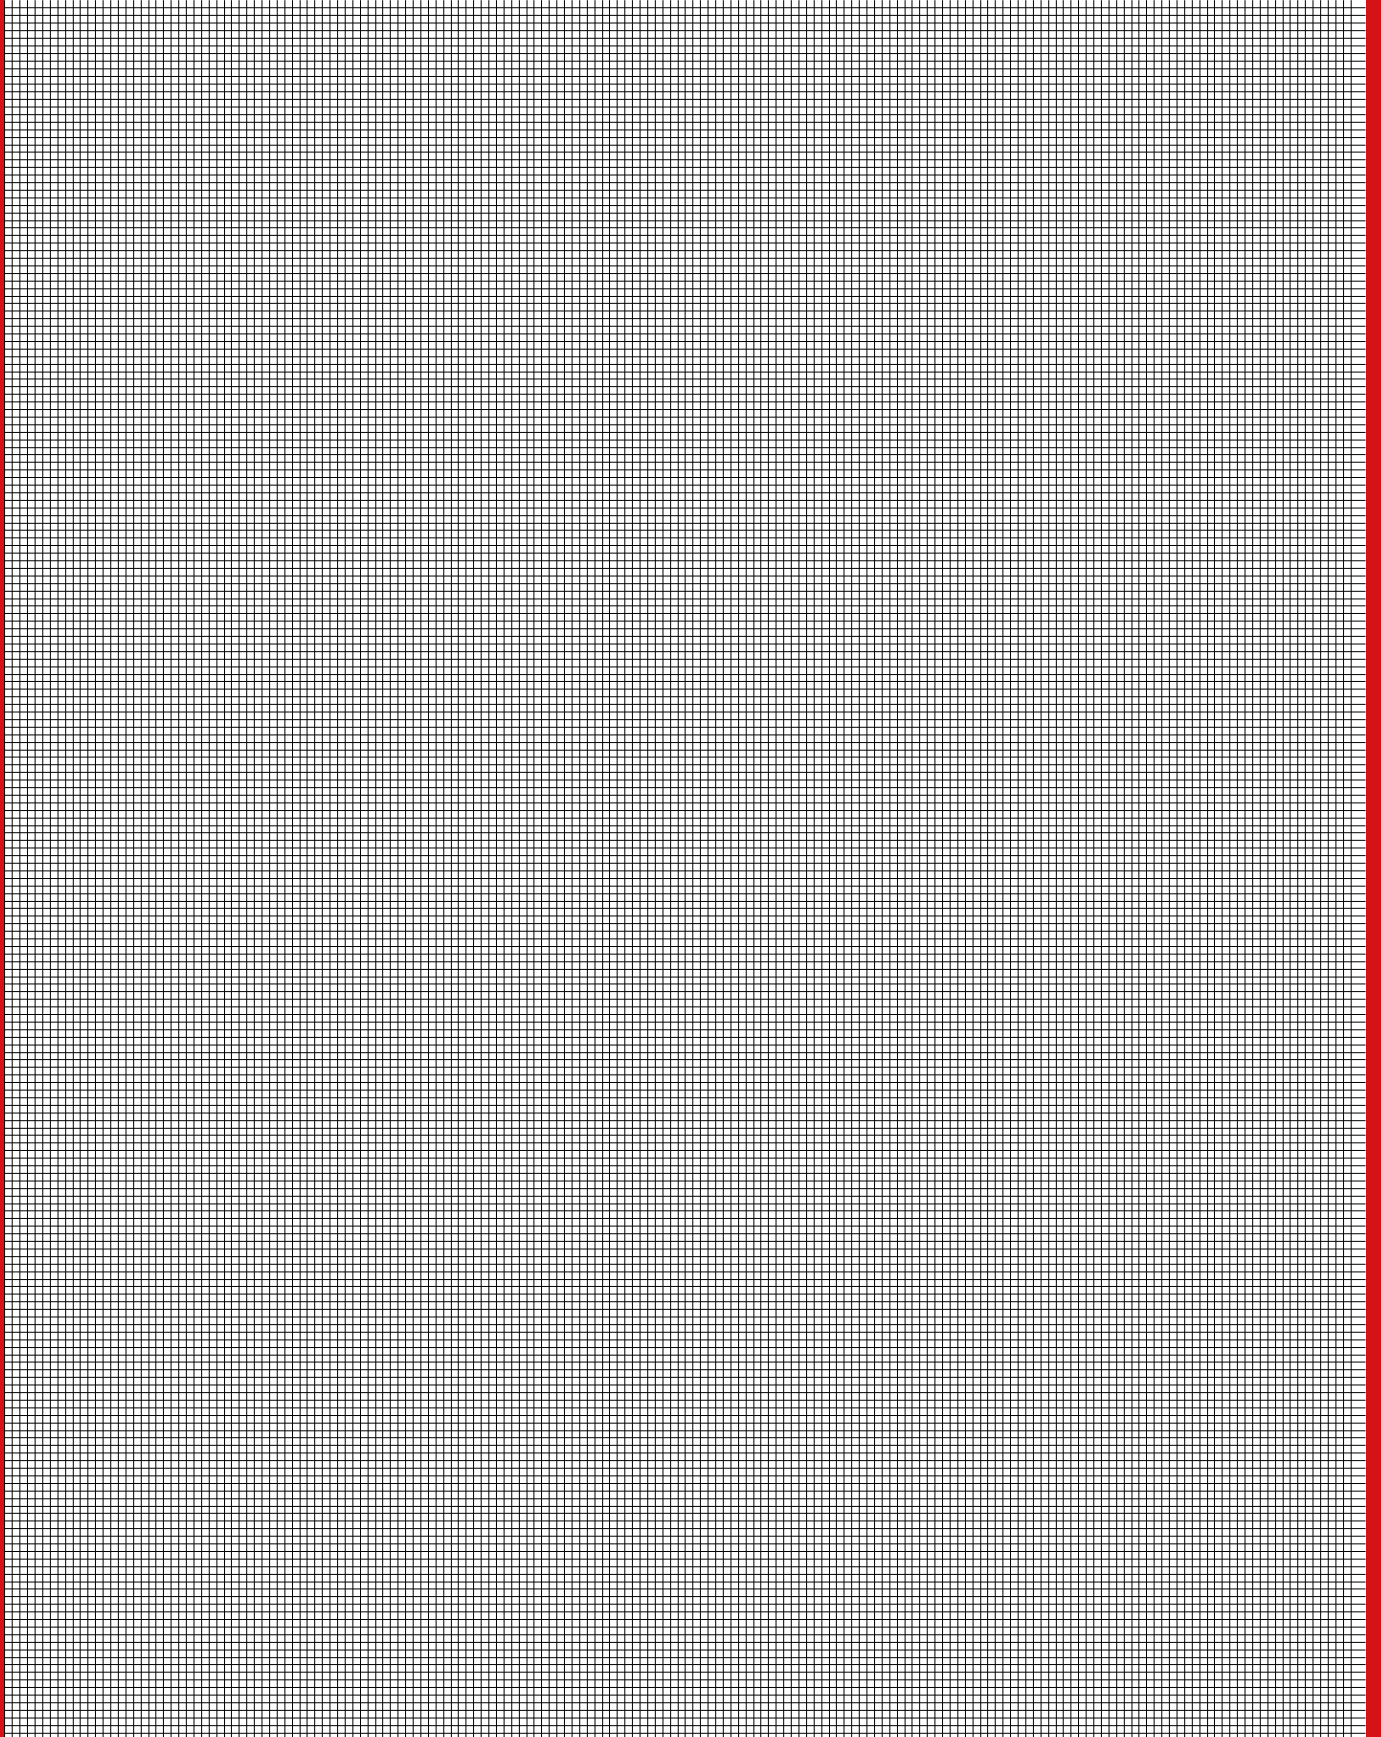



ESPECIALLY FOR GRAPHITE MACHINING

The hard coating ensures excellent wear resistance and long tool life, the ultra-fine diamond coating leaves an outstanding surface finish.



**AFD50724-...R...**

2 flutes, mini design, with corner radius

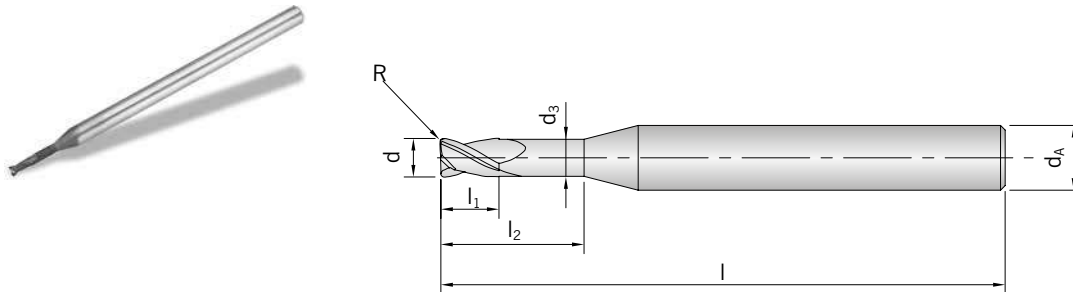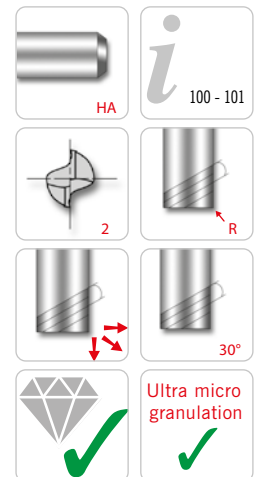

Only for graphite machining

Shank DIN 6535HA	d -0,02	d _A h6	d _s	l ₁	l ₂	l	R	PG 24 / Price in £ HC
								D100
AFD50724-002A	0.2	3	-	0.3	-	40	-	62.67
AFD50724-003A	0.3	3	-	0.5	-	40	-	62.67
AFD50724-004A	0.4	3	-	0.6	-	40	-	51.27
AFD50724-005AR0,05	0.5	3	0.45	0.7	2.5	40	0.05	51.27
AFD50724-005BR0,05	0.5	3	0.45	0.7	4.0	40	0.05	51.27
AFD50724-006AR0,05	0.6	3	0.55	0.9	3.0	40	0.05	51.27
AFD50724-006BR0,05	0.6	3	0.55	0.9	5.0	40	0.05	51.27
AFD50724-008AR0,05	0.8	3	0.75	1.2	4.0	40	0.05	51.27
AFD50724-008BR0,05	0.8	3	0.75	1.2	7.0	40	0.05	51.27
AFD50724-010AR0,1	1.0	3	0.95	1.5	5.0	40	0.10	51.27
AFD50724-010BR0,1	1.0	3	0.95	1.5	8.5	40	0.10	51.27
AFD50724-010CR0,1	1.0	3	0.95	1.5	12.0	40	0.10	51.27
AFD50724-012AR0,1	1.2	3	1.15	1.8	6.0	50	0.10	51.27
AFD50724-012BR0,1	1.2	3	1.15	1.8	10.0	50	0.10	51.27
AFD50724-015AR0,15	1.5	3	1.40	2.2	7.5	50	0.15	51.27
AFD50724-015BR0,15	1.5	3	1.40	2.2	12.0	50	0.15	51.27
AFD50724-015CR0,15	1.5	3	1.40	2.2	18.0	50	0.15	51.27
AFD50724-020AR0,15	2.0	3	1.90	2.2	10.0	60	0.15	51.27
AFD50724-020BR0,15	2.0	3	1.90	2.2	16.0	60	0.15	51.27
AFD50724-020CR0,15	2.0	3	1.90	2.2	25.0	60	0.15	51.27
AFD50724-030AR0,2	3.0	4	2.90	3.0	10.0	65	0.20	55.53
AFD50724-030BR0,2	3.0	4	2.90	3.0	15.0	65	0.20	55.53
AFD50724-030CR0,2	3.0	4	2.90	3.0	20.0	65	0.20	55.53
AFD50724-030DR0,2	3.0	4	2.90	3.0	25.0	75	0.20	55.53
AFD50724-030ER0,2	3.0	4	2.90	3.0	30.0	75	0.20	55.53
AFD50724-040AR0,2	4.0	6	3.90	4.0	20.0	65	0.20	75.47
AFD50724-040BR0,2	4.0	6	3.90	4.0	30.0	75	0.20	75.47
AFD50724-040CR0,2	4.0	6	3.90	4.0	40.0	90	0.20	75.47
AFD50724-050AR0,3	5.0	6	4.90	5.0	20.0	75	0.30	75.47
AFD50724-050BR0,3	5.0	6	4.90	5.0	30.0	75	0.30	75.47
AFD50724-050CR0,3	5.0	6	4.90	5.0	40.0	90	0.30	75.47



Only for graphite machining

Shank DIN 6535HA	d -0,02	d _A h6	d ₃	l ₁	l ₂	l	R	PG 24 / Price in £ HC
								D100
AFD50724-050DR0,3	5.0	6	4.90	5.0	50.0	90	0.30	75.47
AFD50724-060AR0,3	6.0	6	5.90	6.0	30.0	75	0.30	75.47
AFD50724-060BR0,3	6.0	6	5.90	6.0	40.0	90	0.30	75.47
AFD50724-060CR0,3	6.0	6	5.90	6.0	50.0	90	0.30	84.02
AFD50724-060DR0,3	6.0	6	5.90	6.0	60.0	100	0.30	84.02

HC = Carbide coated

P	
M	
K	
N	●
S	
H	



● Main application

○ Secondary application



AFD50121-...

2 flutes, long design

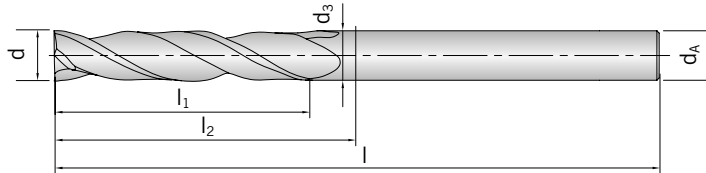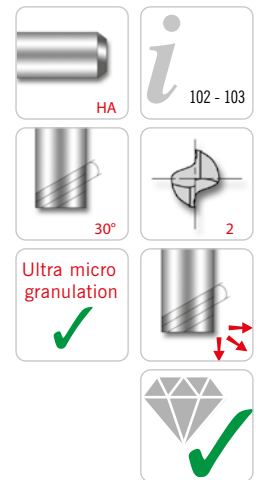

AFD

Only for graphite machining

Shank DIN 6535HA	d -0,03	d _A h6	d ₃	l ₁	l ₂	l	PG 24 / Price in £ HC
							D100
AFD50121-005	0.5	3	0.45	1	2	40	37.03
AFD50121-006	0.6	3	0.55	2	3	40	37.03
AFD50121-007	0.7	3	0.65	2	4	40	37.03
AFD50121-008	0.8	3	0.75	2	5	40	37.03
AFD50121-009	0.9	3	0.85	2	6	40	37.03
AFD50121-010	1.0	4	0.95	3	8	75	54.12
AFD50121-015	1.5	4	1.45	4	10	75	54.12
AFD50121-020	2.0	4	1.90	6	16	100	54.12
AFD50121-025	2.5	4	2.40	8	20	100	54.12
AFD50121-030	3.0	6	2.80	8	30	100	62.67
AFD50121-035	3.5	6	3.20	10	35	100	62.67
AFD50121-040	4.0	6	3.70	20	40	100	65.51
AFD50121-050	5.0	6	4.60	25	50	125	98.26
AFD50121-060	6.0	6	5.60	30	60	140	109.66
AFD50121-070	7.0	6	-	35	-	140	169.47
AFD50121-080	8.0	8	7.40	40	80	150	176.59
AFD50121-090	9.0	8	-	45	-	150	206.48
AFD50121-100	10.0	10	9.40	50	80	150	206.48
AFD50121-110	11.0	10	-	50	-	150	250.64
AFD50121-120	12.0	12	11.40	55	80	150	250.64



HC = Carbide coated

P	
M	
K	
N	●
S	
H	

● Main application
○ Secondary application

**AFD51824-...**

2 flutes, mini design

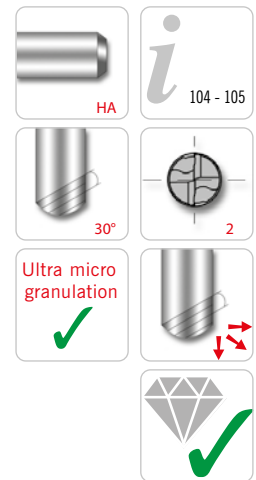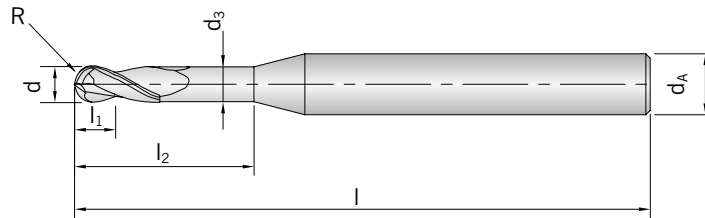

AFD

Only for graphite machining

Shank DIN 6535HA	d -0,02	d _A h6	d ₃	l ₁	l ₂	l	R ± 0,01	PG 24 / Price in £ HC
								D100
AFD51824-002A	0.2	3	-	0.2	-	40	0.10	78.33
AFD51824-003A	0.3	3	-	0.3	-	40	0.15	69.79
AFD51824-004A	0.4	3	-	0.4	-	40	0.20	69.79
AFD51824-005A	0.5	3	0.45	0.5	2.5	40	0.25	69.79
AFD51824-006A	0.6	3	0.55	0.6	3.0	40	0.30	69.79
AFD51824-006B	0.6	3	0.55	0.6	5.0	40	0.30	69.79
AFD51824-008A	0.8	3	0.75	0.8	4.0	40	0.40	54.12
AFD51824-008B	0.8	3	0.75	0.8	7.0	40	0.40	54.12
AFD51824-010A	1.0	3	0.95	1.0	5.0	40	0.50	54.12
AFD51824-010B	1.0	3	0.95	1.0	8.5	40	0.50	54.12
AFD51824-010C	1.0	3	0.95	1.0	12.0	40	0.50	54.12
AFD51824-012A	1.2	3	1.15	1.2	6.0	50	0.60	54.12
AFD51824-012B	1.2	3	1.15	1.2	10.0	50	0.60	54.12
AFD51824-015A	1.5	3	1.40	1.5	7.5	50	0.75	54.12
AFD51824-015B	1.5	3	1.40	1.5	12.0	50	0.75	54.12
AFD51824-015C	1.5	3	1.40	1.5	18.0	50	0.75	54.12
AFD51824-020A	2.0	3	1.90	2.2	10.0	60	1.00	54.12
AFD51824-020B	2.0	3	1.90	2.2	16.0	60	1.00	54.12
AFD51824-020C	2.0	3	1.90	2.2	25.0	60	1.00	54.12
AFD51824-030A	3.0	4	2.90	3.0	10.0	65	1.50	69.79
AFD51824-030B	3.0	4	2.90	3.0	15.0	65	1.50	69.79
AFD51824-030C	3.0	4	2.90	3.0	20.0	65	1.50	69.79
AFD51824-030D	3.0	4	2.90	3.0	25.0	75	1.50	69.79
AFD51824-030E	3.0	4	2.90	3.0	30.0	75	1.50	69.79
AFD51824-040A	4.0	6	3.90	4.0	20.0	65	2.00	88.28
AFD51824-040B	4.0	6	3.90	4.0	30.0	75	2.00	88.28
AFD51824-040C	4.0	6	3.90	4.0	40.0	90	2.00	88.28
AFD51824-050A	5.0	6	4.90	5.0	20.0	65	2.50	88.28
AFD51824-050B	5.0	6	4.90	5.0	30.0	75	2.50	88.28
AFD51824-050C	5.0	6	4.90	5.0	40.0	90	2.50	88.28
AFD51824-050D	5.0	6	4.90	5.0	50.0	90	2.50	88.28



Only for graphite machining

Shank DIN 6535HA	d -0,02	d ₁ h6	d ₃	l ₁	l ₂	l	R ± 0,01	PG 24 / Price in £ HC
								D100
AFD51824-060A	6.0	6	5.90	6.0	30.0	75	3.00	88.28
AFD51824-060B	6.0	6	5.90	6.0	40.0	90	3.00	88.28
AFD51824-060C	6.0	6	5.90	6.0	50.0	90	3.00	98.26
AFD51824-060D	6.0	6	5.90	6.0	60.0	100	3.00	98.26

HC = Carbide coated



P	
M	
K	
N	●
S	
H	

- Main application
- Secondary application



AFD54030-...R...

3 flutes, short design, with corner radius

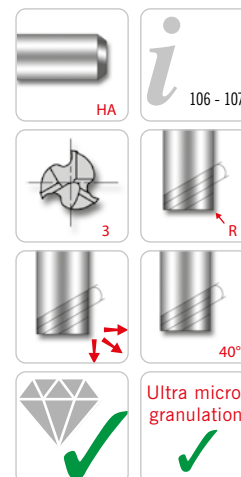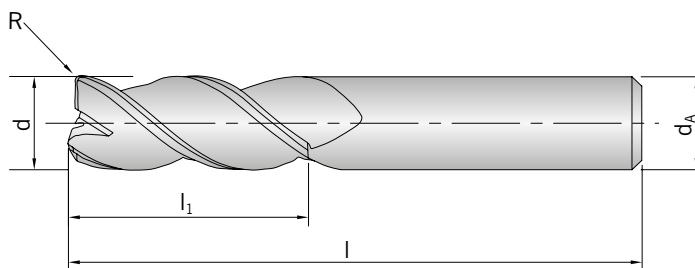

Only for graphite machining

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	R	PG 24 / Price in £ HC
						D100
AFD54030-020R0,15	2	3	6	40	0.15	37.03
AFD54030-030R0,15	3	3	12	40	0.15	38.45
AFD54030-040R0,2	4	4	14	50	0.20	51.27
AFD54030-050R0,3	5	5	16	50	0.30	55.53
AFD54030-060R0,3	6	6	20	65	0.30	72.63
AFD54030-080R0,5	8	8	20	65	0.50	98.26
AFD54030-100R0,5	10	10	25	75	0.50	135.30
AFD54030-120R0,5	12	12	25	75	0.50	163.78

HC = Carbide coated

P	
M	
K	
N	●
S	
H	

● Main application
○ Secondary application




AFD50724-...R...


D100 coating for graphite machining

AFD

$\varnothing d_1$ [mm]	Z	fz [mm]	n 15000 min1 vf [mm/min.]	n 25000 min1 vf [mm/min.]	n 30000 min1 vf [mm/min.]	n 45000 min1 vf [mm/min.]
0,2	2	0,004	120	200	240	360
0,3	2	0,005	150	250	300	450
0,4	2	0,005	150	250	300	450
0,5	2	0,006	180	300	360	540
0,6	2	0,007	210	350	420	630
0,8	2	0,009	270	450	540	810
1,0	2	0,012	360	600	720	1080
1,2	2	0,015	450	750	900	1350
1,5	2	0,018	540	900	1080	1620
2,0	2	0,024	720	1200	1440	2160
3,0	2	0,035	1050	1750	2100	3150
4,0	2	0,047	1410	2350	2820	4230
5,0	2	0,059	1770	2950	3540	5310
6,0	2	0,071	2130	3550	4260	6390

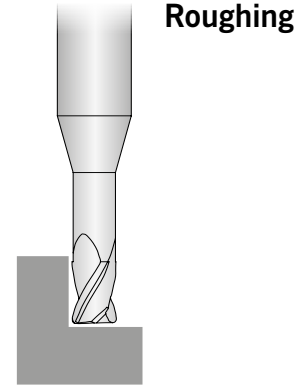

$\varnothing d_1$ [mm]	Z	fz [mm]	n 15000 min1 vf [mm/min.]	n 25000 min1 vf [mm/min.]	n 30000 min1 vf [mm/min.]	n 45000 min1 vf [mm/min.]
0,2	2	0,004	120	200	240	360
0,3	2	0,004	120	200	240	360
0,4	2	0,004	120	200	240	360
0,5	2	0,005	150	250	300	450
0,6	2	0,005	150	250	300	450
0,8	2	0,007	210	350	420	630
1,0	2	0,009	270	450	540	810
1,2	2	0,011	330	550	660	990
1,5	2	0,014	420	700	840	1260
2,0	2	0,018	540	900	1080	1620
3,0	2	0,027	810	1350	1620	2430
4,0	2	0,036	1080	1800	2160	3240
5,0	2	0,045	1350	2250	2700	4050
6,0	2	0,055	1650	2750	3300	4950

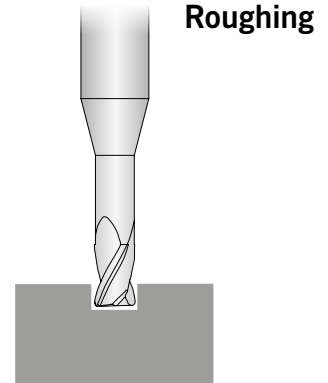


Attention: These cutting data are recommendations only.
Customer specific circumstances such as machine power, stability, tool overhang etc. are not taken into consideration.



AFD50724-...R...

D100 coating for graphite machining


Ø d ₁ [mm]	Z	fz [mm]	n 15000 min1 vf [mm/min.]	n 25000 min1 vf [mm/min.]	n 30000 min1 vf [mm/min.]	n 45000 min1 vf [mm/min.]
0,2	2	0,004	120	200	240	360
0,3	2	0,004	120	200	240	360
0,4	2	0,005	150	250	300	450
0,5	2	0,007	210	350	420	630
0,6	2	0,008	240	400	480	720
0,8	2	0,011	330	550	660	990
1,0	2	0,013	390	650	780	1170
1,2	2	0,015	450	750	900	1350
1,5	2	0,020	600	1000	1200	1800
2,0	2	0,027	810	1350	1620	2430
3,0	2	0,040	1200	2000	2400	3600
4,0	2	0,053	1590	2650	3180	4770
5,0	2	0,067	2010	3350	4020	6030
6,0	2	0,080	2400	4000	4800	7200



Finishing

AFD

Ø d ₁ [mm]	Z	fz [mm]	n 15000 min1 vf [mm/min.]	n 25000 min1 vf [mm/min.]	n 30000 min1 vf [mm/min.]	n 45000 min1 vf [mm/min.]
0,2	2	0,004	120	200	240	360
0,3	2	0,004	120	200	240	360
0,4	2	0,005	150	250	300	450
0,5	2	0,007	210	350	420	630
0,6	2	0,008	240	400	480	720
0,8	2	0,011	330	550	660	990
1,0	2	0,013	390	650	780	1170
1,2	2	0,015	450	750	900	1350
1,5	2	0,020	600	1000	1200	1800
2,0	2	0,027	810	1350	1620	2430
3,0	2	0,040	1200	2000	2400	3600
4,0	2	0,053	1590	2650	3180	4770
5,0	2	0,067	2010	3350	4020	6030
6,0	2	0,080	2400	4000	4800	7200



Finishing

Attention: These cutting data are recommendations only.
Customer specific circumstances such as machine power, stability, tool overhang etc. are not taken into consideration.



AFD50121-...

D100 coating for graphite machining

AFD

Ø d ₁ [mm]	Z	fz [mm]	n 15000 min1 vf [mm/min.]	n 25000 min1 vf [mm/min.]	n 30000 min1 vf [mm/min.]	n 45000 min1 vf [mm/min.]
0,5	2	0,005	150	250	300	450
0,6	2	0,006	180	300	360	540
0,7	2	0,007	210	350	420	630
0,8	2	0,008	240	400	480	720
0,9	2	0,008	240	400	480	720
1,0	2	0,009	270	450	540	810
1,5	2	0,014	420	700	840	1260
2,0	2	0,019	570	950	1140	1710
2,5	2	0,024	720	1200	1440	2160
3,0	2	0,029	840	1400	1680	2520
3,5	2	0,032	960	1600	1920	2880
4,0	2	0,040	1200	2000	2400	3600
5,0	2	0,045	1350	2250	2700	4050
6,0	2	0,050	1500	2500	3000	4500
7,0	2	0,055	1650	2750	3300	4950
8,0	2	0,060	1800	3000	3600	5400
9,0	2	0,065	1950	3250	3900	5850
10,0	2	0,070	2100	3500	4200	6300
11,0	2	0,075	2250	3750	4500	6750
12,0	2	0,080	2400	4000	4800	7200



Roughing

Ø d ₁ [mm]	Z	fz [mm]	n 15000 min1 vf [mm/min.]	n 25000 min1 vf [mm/min.]	n 30000 min1 vf [mm/min.]	n 45000 min1 vf [mm/min.]
0,5	2	0,003	90	150	180	270
0,6	2	0,003	90	150	180	270
0,7	2	0,003	90	150	180	270
0,8	2	0,004	120	200	240	360
0,9	2	0,005	150	250	300	450
1,0	2	0,005	150	250	300	450
1,5	2	0,008	240	400	480	720
2,0	2	0,011	330	550	660	990
2,5	2	0,014	420	700	840	1260
3,0	2	0,016	480	800	960	1440
3,5	2	0,019	570	950	1140	1710
4,0	2	0,021	630	1050	1260	1890
5,0	2	0,026	780	1300	1560	2340
6,0	2	0,031	930	1550	1860	2790
7,0	2	0,036	1080	1800	2160	3240
8,0	2	0,040	1200	2000	2400	3600
9,0	2	0,045	1350	2250	2700	4050
10,0	2	0,050	1500	2500	3000	4500
11,0	2	0,055	1650	2750	3300	4950
12,0	2	0,060	1800	3000	3600	5400



Roughing

Attention: These cutting data are recommendations only.
Customer specific circumstances such as machine power, stability, tool overhang etc. are not taken into consideration.



AFD50121-...

D100 coating for graphite machining


Ø d ₁ [mm]	Z	fz [mm]	n 15000 min1 vf [mm/min.]	n 25000 min1 vf [mm/min.]	n 30000 min1 vf [mm/min.]	n 45000 min1 vf [mm/min.]
0,5	2	0,005	150	250	300	450
0,6	2	0,006	180	300	360	540
0,7	2	0,007	210	350	420	630
0,8	2	0,009	270	450	540	810
0,9	2	0,009	270	450	540	810
1,0	2	0,011	330	550	660	990
1,5	2	0,016	480	800	960	1440
2,0	2	0,021	630	1050	1260	1890
2,5	2	0,026	780	1300	1560	2340
3,0	2	0,031	930	1550	1860	2790
3,5	2	0,036	1080	1800	2160	3240
4,0	2	0,040	1200	2000	2400	3600
5,0	2	0,045	1350	2250	2700	4050
6,0	2	0,050	1500	2500	3000	4500
7,0	2	0,055	1650	2750	3300	4950
8,0	2	0,060	1800	3000	3600	5400
9,0	2	0,065	1950	3250	3900	5850
10,0	2	0,070	2100	3500	4200	6300
11,0	2	0,075	2250	3750	4500	6750
12,0	2	0,080	2400	4000	4800	7200



Finishing

AFD

Ø d ₁ [mm]	Z	fz [mm]	n 15000 min1 vf [mm/min.]	n 25000 min1 vf [mm/min.]	n 30000 min1 vf [mm/min.]	n 45000 min1 vf [mm/min.]
0,5	2	0,005	150	250	300	450
0,6	2	0,006	180	300	360	540
0,7	2	0,007	210	350	420	630
0,8	2	0,009	270	450	540	810
0,9	2	0,009	270	450	540	810
1,0	2	0,011	330	550	660	990
1,5	2	0,016	480	800	960	1440
2,0	2	0,021	630	1050	1260	1890
2,5	2	0,026	780	1300	1560	2340
3,0	2	0,031	930	1550	1860	2790
3,5	2	0,036	1080	1800	2160	3240
4,0	2	0,040	1200	2000	2400	3600
5,0	2	0,045	1350	2250	2700	4050
6,0	2	0,050	1500	2500	3000	4500
7,0	2	0,055	1650	2750	3300	4950
8,0	2	0,060	1800	3000	3600	5400
9,0	2	0,065	1950	3250	3900	5850
10,0	2	0,070	2100	3500	4200	6300
11,0	2	0,075	2250	3750	4500	6750
12,0	2	0,080	2400	4000	4800	7200



Finishing

Attention: These cutting data are recommendations only.
Customer specific circumstances such as machine power, stability, tool overhang etc. are not taken into consideration.




AFD51824-...


D100 coating for graphite machining

AFD

$\varnothing d_1$ [mm]	Z	fz [mm]	n 15000 min1 vf [mm/min.]	n 25000 min1 vf [mm/min.]	n 30000 min1 vf [mm/min.]	n 45000 min1 vf [mm/min.]
0,2	2	0,003	90	150	180	270
0,3	2	0,004	120	200	240	360
0,4	2	0,004	120	200	240	360
0,5	2	0,005	150	250	300	450
0,6	2	0,006	180	300	360	540
0,8	2	0,008	240	400	480	720
1,0	2	0,009	270	450	540	810
1,2	2	0,011	330	550	660	990
1,5	2	0,014	420	700	840	1260
2,0	2	0,019	570	950	1140	1710
3,0	2	0,028	840	1400	1680	2520
4,0	2	0,037	1110	1850	2220	3330
5,0	2	0,046	1380	2300	2760	4140
6,0	2	0,055	1650	2750	3300	4950

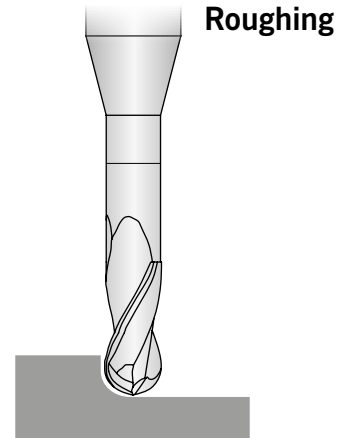

$\varnothing d_1$ [mm]	Z	fz [mm]	n 15000 min1 vf [mm/min.]	n 25000 min1 vf [mm/min.]	n 30000 min1 vf [mm/min.]	n 45000 min1 vf [mm/min.]
0,2	2	0,003	90	150	180	270
0,3	2	0,003	90	150	180	270
0,4	2	0,004	120	200	240	360
0,5	2	0,004	120	200	240	360
0,6	2	0,004	120	200	240	360
0,8	2	0,006	180	300	360	540
1,0	2	0,007	210	350	420	630
1,2	2	0,009	270	450	540	810
1,5	2	0,011	330	550	660	990
2,0	2	0,015	450	750	900	1350
3,0	2	0,022	660	1100	1320	1980
4,0	2	0,029	870	1450	1740	2610
5,0	2	0,036	1080	1800	2160	3240
6,0	2	0,043	1290	2150	2580	3870

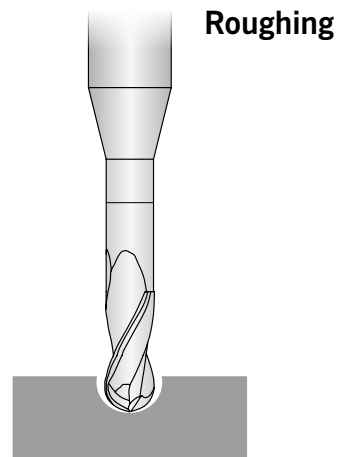


Attention: These cutting data are recommendations only.
Customer specific circumstances such as machine power, stability, tool overhang etc. are not taken into consideration.



AFD51824-...

D100 coating for graphite machining


Ø d ₁ [mm]	Z	fz [mm]	n 15000 min1 vf [mm/min.]	n 25000 min1 vf [mm/min.]	n 30000 min1 vf [mm/min.]	n 45000 min1 vf [mm/min.]
0,2	2	0,003	90	150	180	270
0,3	2	0,004	120	200	240	360
0,4	2	0,004	120	200	240	360
0,5	2	0,005	150	250	300	450
0,6	2	0,006	180	300	360	540
0,8	2	0,009	270	450	540	810
1,0	2	0,011	330	550	660	990
1,2	2	0,013	390	650	780	1170
1,5	2	0,016	480	800	960	1440
2,0	2	0,021	630	1050	1260	1890
3,0	2	0,032	960	1600	1920	2880
4,0	2	0,042	1260	2100	2520	3780
5,0	2	0,053	1590	2650	3180	4770
6,0	2	0,063	1890	3150	3780	5670

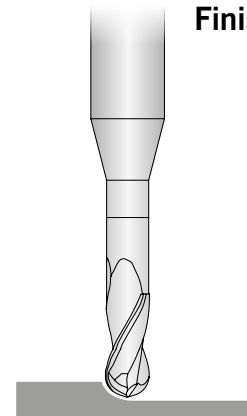

Finishing

AFD

Ø d ₁ [mm]	Z	fz [mm]	n 15000 min1 vf [mm/min.]	n 25000 min1 vf [mm/min.]	n 30000 min1 vf [mm/min.]	n 45000 min1 vf [mm/min.]
0,2	2	0,003	90	150	180	270
0,3	2	0,004	120	200	240	360
0,4	2	0,004	120	200	240	360
0,5	2	0,005	150	250	300	450
0,6	2	0,006	180	300	360	540
0,8	2	0,009	270	450	540	810
1,0	2	0,011	330	550	660	990
1,2	2	0,013	390	650	780	1170
1,5	2	0,016	480	800	960	1440
2,0	2	0,021	630	1050	1260	1890
3,0	2	0,032	960	1600	1920	2880
4,0	2	0,042	1260	2100	2520	3780
5,0	2	0,053	1590	2650	3180	4770
6,0	2	0,063	1890	3150	3780	5670

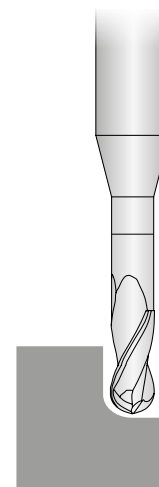

Finishing

Attention: These cutting data are recommendations only.
Customer specific circumstances such as machine power, stability, tool overhang etc. are not taken into consideration.




AFD54030-...R...

D100 coating for graphite machining


AFD

Ø d ₁ [mm]	Z	fz [mm]	n 10000 min1 vf [mm/min.]	n 15000 min1 vf [mm/min.]	n 20000 min1 vf [mm/min.]	n 30000 min1 vf [mm/min.]
2,0	3	0,024	720	1080	1440	2160
3,0	3	0,035	1050	1575	2100	3150
4,0	3	0,047	1410	2115	2820	4230
5,0	3	0,059	1770	2655	3540	5310
6,0	3	0,071	2130	3195	4260	6390
8,0	3	0,094	2820	4230	5640	8460
10,0	3	0,118	3540	5310	7080	10620
12,0	3	0,141	4230	6345	8460	12690



Roughing

Ø d ₁ [mm]	Z	fz [mm]	n 10000 min1 vf [mm/min.]	n 15000 min1 vf [mm/min.]	n 20000 min1 vf [mm/min.]	n 30000 min1 vf [mm/min.]
2,0	3	0,018	540	810	1080	1620
3,0	3	0,027	810	1215	1620	2430
4,0	3	0,036	1080	1620	2160	3240
5,0	3	0,045	1350	2025	2700	4050
6,0	3	0,055	1650	2475	3300	4950
8,0	3	0,073	2190	3285	4380	6570
10,0	3	0,091	2730	4095	5460	8190
12,0	3	0,109	3270	4905	6540	9810



Roughing


Attention: These cutting data are recommendations only.
Customer specific circumstances such as machine power, stability, tool overhang etc. are not taken into consideration.



AFD54030-...R...

D100 coating for graphite machining

$\varnothing d_1$ [mm]	Z	fz [mm]	n 10000 min1 vf [mm/min.]	n 15000 min1 vf [mm/min.]	n 20000 min1 vf [mm/min.]	n 30000 min1 vf [mm/min.]
2,0	3	0,027	810	1215	1620	2430
3,0	3	0,040	1200	1800	2400	3600
4,0	3	0,053	1590	2385	3180	4770
5,0	3	0,067	2010	3015	4020	6030
6,0	3	0,080	2400	3600	4800	7200
8,0	3	0,107	3210	4815	6420	9630
10,0	3	0,133	3990	5985	7980	11970
12,0	3	0,160	4800	7200	9600	14400



Finishing

AFD

$\varnothing d_1$ [mm]	Z	fz [mm]	n 10000 min1 vf [mm/min.]	n 15000 min1 vf [mm/min.]	n 20000 min1 vf [mm/min.]	n 30000 min1 vf [mm/min.]
2,0	3	0,027	810	1215	1620	2430
3,0	3	0,040	1200	1800	2400	3600
4,0	3	0,053	1590	2385	3180	4770
5,0	3	0,067	2010	3015	4020	6030
6,0	3	0,080	2400	3600	4800	7200
8,0	3	0,107	3210	4815	6420	9630
10,0	3	0,133	3990	5985	7980	11970
12,0	3	0,160	4800	7200	9600	14400




Finishing

Attention: These cutting data are recommendations only.
Customer specific circumstances such as machine power, stability, tool overhang etc. are not taken into consideration.

For more information see

www.arno.de

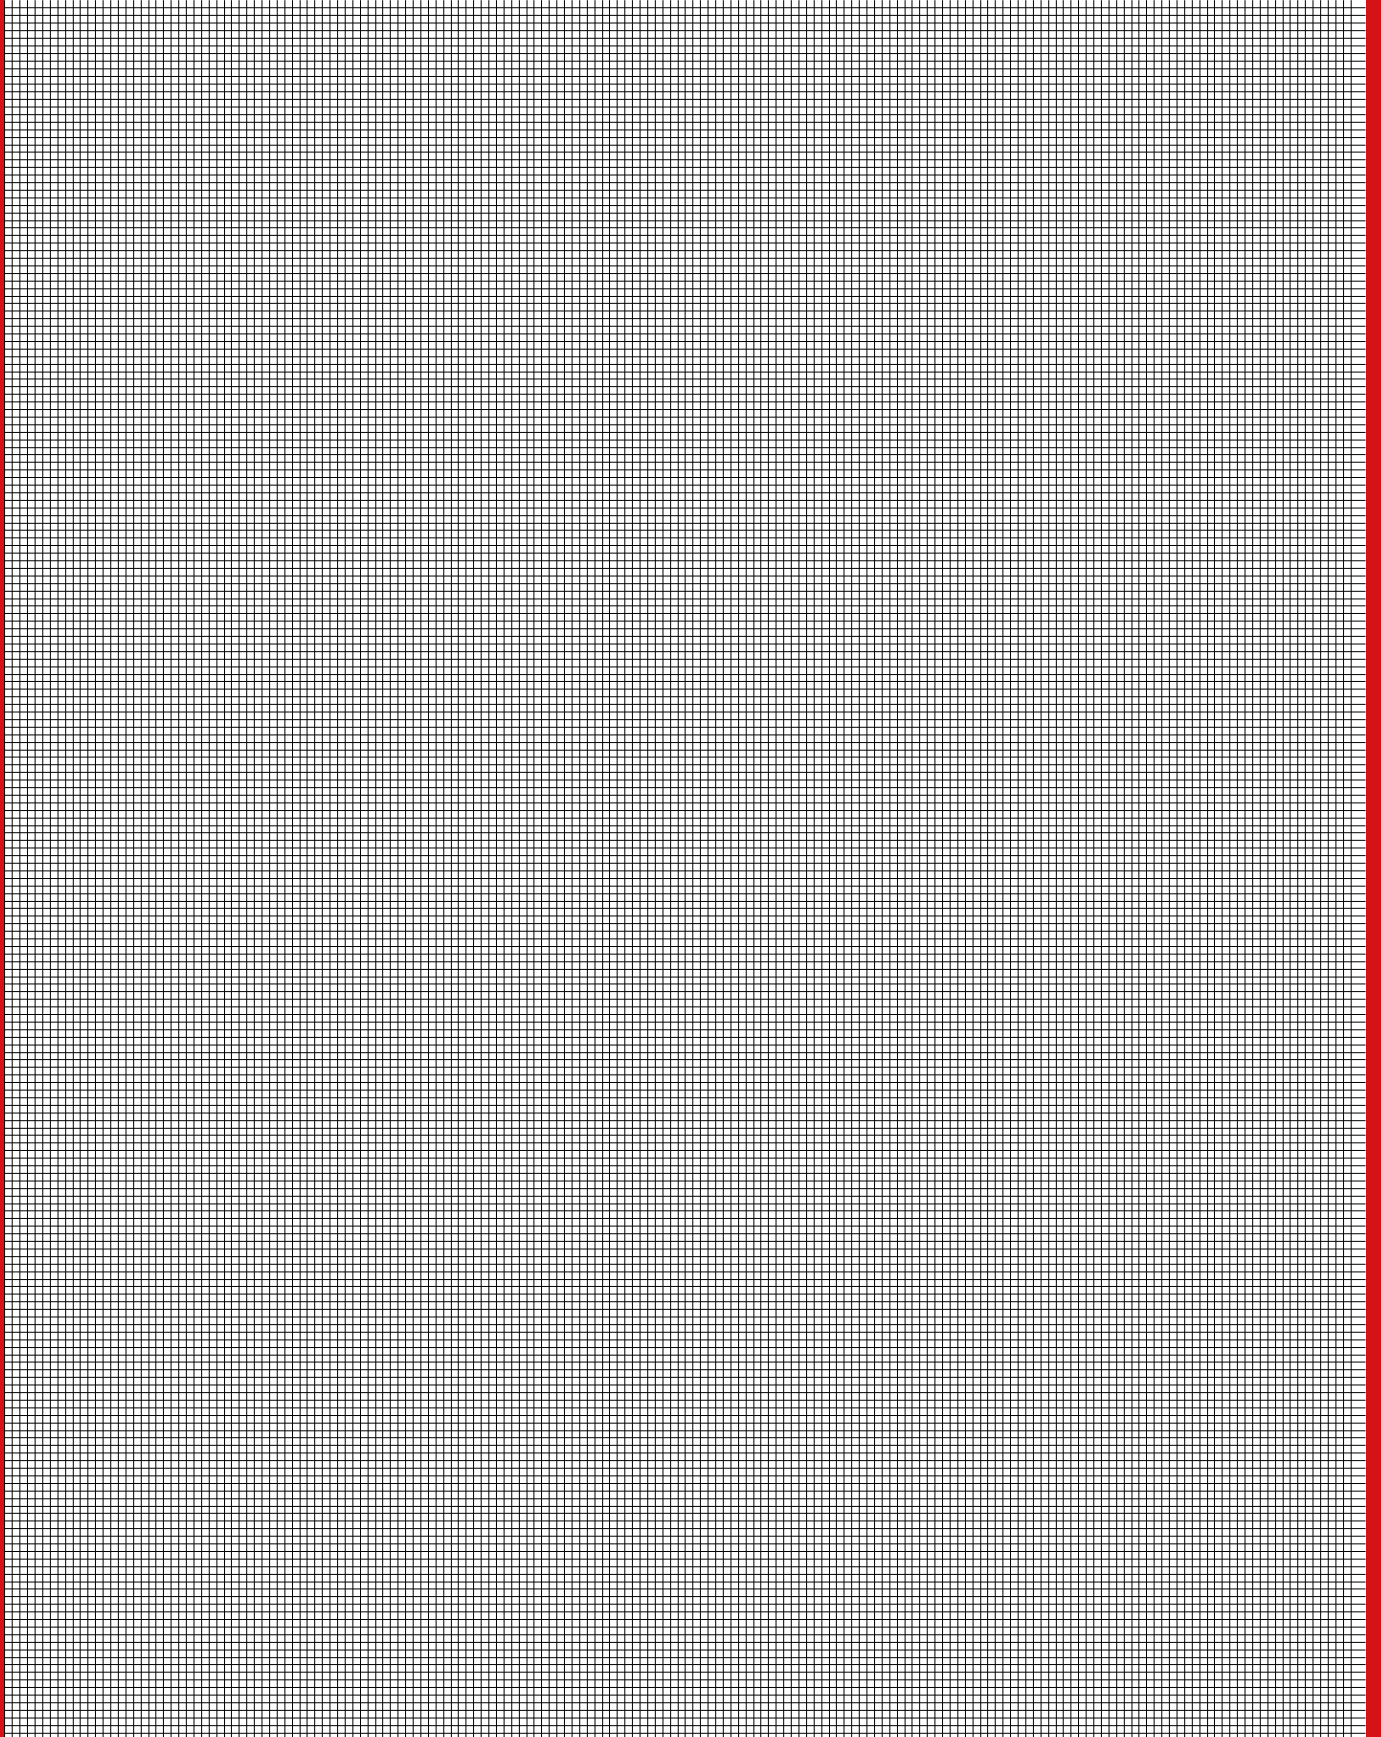

IDEAL FOR HIGH SPEED MACHINING OF EXOTIC MATERIALS (TITANIUM, INCONEL) AND STAINLESS STEELS.



**Tools for Aerospace Industry, Energy & Power generation.
For Roughing and Semi-finishing for universal use, also
for Finishing difficult-to-machine materials. The
special coating achieves higher wear resis-
tance, better oxidation resistance and
higher thermal stability.**





AFE51840-...R...

4 flutes, short design, with corner radius

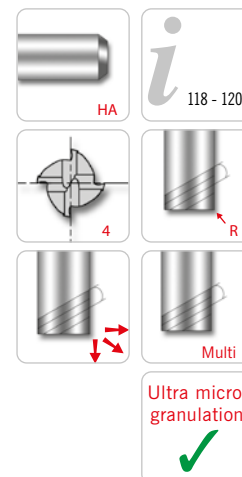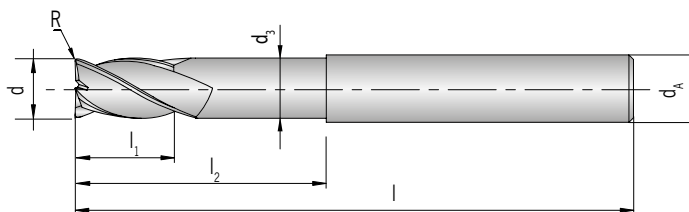

AFE

Shank DIN 6535HA	d -0,03	d _A h6	d ₃	l ₁	l ₂	l	R	PG 24 / Price in £ HC
								£200
AFE51840-060R0,5	6	6,0	5.5	13	20	57	0.5	25.88
AFE51840-060R1,0	6	6,0	5.5	13	20	57	1.0	25.88
AFE51840-080R0,5	8	8,0	7.5	19	25	63	0.5	35.41
AFE51840-080R1,0	8	8,0	7.5	19	25	63	1.0	35.41
AFE51840-080R1,5	8	8,0	7.5	19	25	63	1.5	35.41
AFE51840-080R2,0	8	8,0	7.5	19	25	63	2.0	35.41
AFE51840-100R0,5	10	10,0	9.2	22	30	72	0.5	55.58
AFE51840-100R1,0	10	10,0	9.2	22	30	72	1.0	55.58
AFE51840-100R1,5	10	10,0	9.2	22	30	72	1.5	55.58
AFE51840-100R2,0	10	10,0	9.2	22	30	72	2.0	55.58
AFE51840-120R0,5	12	12,0	11.0	26	35	83	0.5	78.96
AFE51840-120R1,0	12	12,0	11.0	26	35	83	1.0	78.96
AFE51840-120R1,5	12	12,0	11.0	26	35	83	1.5	78.96
AFE51840-120R2,0	12	12,0	11.0	26	35	83	2.0	78.96
AFE51840-120R3,0	12	12,0	11.0	26	35	83	3.0	78.96
AFE51840-140R1,0	14	14,0	13.0	26	35	83	1.0	108.58
AFE51840-140R2,0	14	14,0	13.0	26	35	83	2.0	108.58
AFE51840-160R1,0	16	16,0	15.0	35	43	92	1.0	140.11
AFE51840-160R1,5	16	16,0	15.0	35	43	92	1.5	140.11
AFE51840-160R2,0	16	16,0	15.0	35	43	92	2.0	140.11
AFE51840-160R3,0	16	16,0	15.0	35	43	92	3.0	140.11
AFE51840-160R4,0	16	16,0	15.0	35	43	92	4.0	140.11
AFE51840-200R1,0	20	20,0	19.0	44	56	110	1.0	241.87
AFE51840-200R1,5	20	20,0	19.0	44	56	110	1.5	241.87
AFE51840-200R2,0	20	20,0	19.0	44	56	110	2.0	241.87
AFE51840-200R3,0	20	20,0	19.0	44	56	110	3.0	241.87
AFE51840-200R3,5	20	20,0	19.0	44	56	110	3.5	241.87
AFE51840-200R4,0	20	20,0	19.0	44	56	110	4.0	241.87



Shank DIN 6535HA	d -0,03	d _A h6	d ₃	l ₁	l ₂	l	R	PG 24 / Price in £ HC
								£200
AFE51840-250R1,0	25	25,0	24.0	55	70	130	1.0	316.03
AFE51840-250R1,5	25	25,0	24.0	55	70	130	1.5	316.03
AFE51840-250R2,0	25	25,0	24.0	55	70	130	2.0	316.03
AFE51840-250R3,0	25	25,0	24.0	55	70	130	3.0	316.03
AFE51840-250R4,0	25	25,0	24.0	55	70	130	4.0	316.03



HC = Carbide coated

P	○
M	●
K	○
N	○
S	●
H	○

- Main application
- Secondary application



AFE51850-...
5 flutes, short design

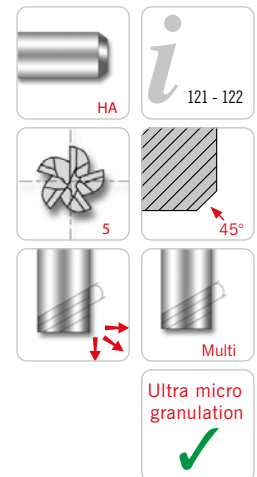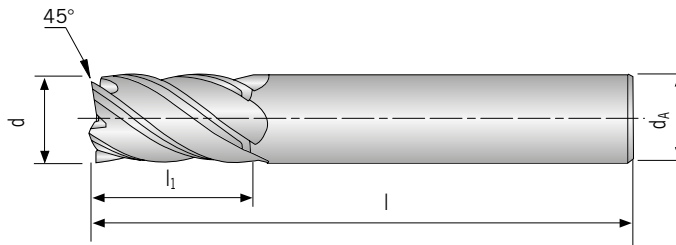

AFE

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	Chamfer	PG 24 / Price in £ HC
						€200
AFE51850-060	6	6,0	10	54	0,2x45°	17.87
AFE51850-080	8	8,0	12	58	0,2x45°	25.22
AFE51850-100	10	10,0	14	66	0,3x45°	37.58
AFE51850-120	12	12,0	16	73	0,35x45°	57.48
AFE51850-160	16	16,0	22	82	0,4x45°	96.76
AFE51850-200	20	20,0	26	92	0,5x45°	153.18
AFE51850-250	25	25,0	29	100	0,5x45°	202.85

HC = Carbide coated



P	○
M	●
K	○
N	○
S	●
H	○

● Main application
○ Secondary application



AFE51850-...R...

5 flutes, short design with corner radius

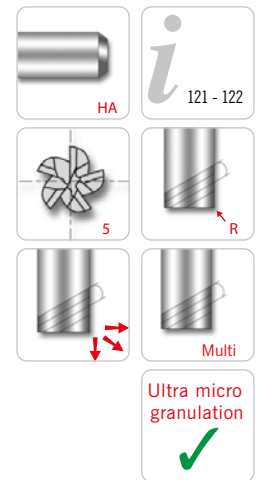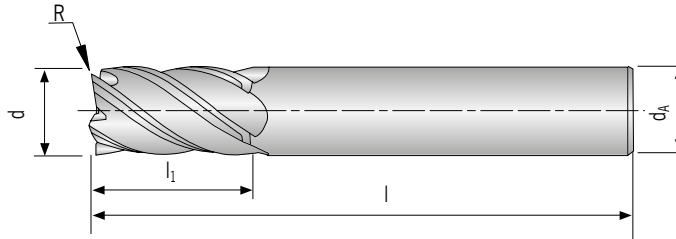

AFE

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	R	PG 24 / Price in £ HC
						£200
AFE51850-060R0,5	6	6,0	10	54	0.5	20.52
AFE51850-080R0,5	8	8,0	12	58	0.5	29.89
AFE51850-100R0,5	10	10,0	14	66	0.5	43.88
AFE51850-120R0,5	12	12,0	16	73	0.5	65.23
AFE51850-160R1,0	16	16,0	22	82	1.0	109.90
AFE51850-200R1,0	20	20,0	26	92	1.0	172.57
AFE51850-250R1,0	25	25,0	29	100	1.0	226.37


HC = Carbide coated

P	○
M	●
K	○
N	○
S	●
H	○

● Main application
○ Secondary application



AFE51851-...
5 flutes, long design

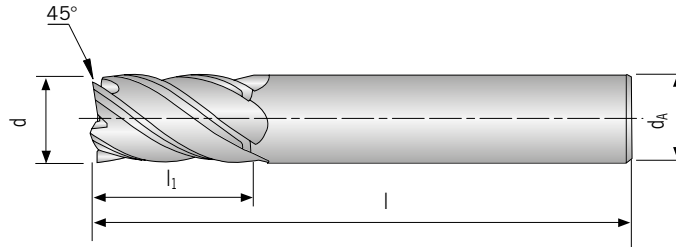

AFE

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	Chamfer	PG 24 / Price in £ HC
						€200
AFE51851-060	6	6,0	13	57	0,2x45°	20.17
AFE51851-080	8	8,0	19	63	0,2x45°	28.57
AFE51851-100	10	10,0	22	72	0,3x45°	44.54
AFE51851-120	12	12,0	26	83	0,35x45°	65.23
AFE51851-160	16	16,0	36	92	0,4x45°	115.15
AFE51851-200	20	20,0	44	104	0,5x45°	189.05
AFE51851-250	25	25,0	54	121	0,5x45°	251.20

HC = Carbide coated



P	○
M	●
K	○
N	
S	●
H	

● Main application
○ Secondary application



AFE51851-...R...

5 flutes, long design with corner radius

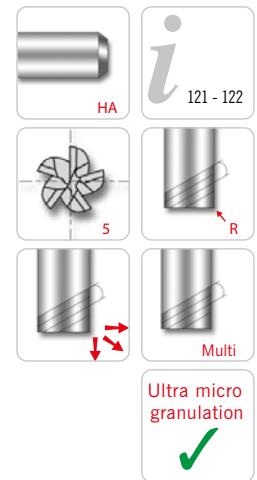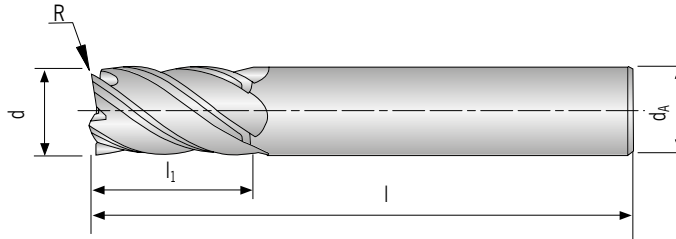

AFE

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	R	PG 24 / Price in £ HC
						£200
AFE51851-060R0,3	6	6,0	13	57	0.3	24.63
AFE51851-060R0,5	6	6,0	13	57	0.5	24.63
AFE51851-060R1,0	6	6,0	13	57	1.0	24.63
AFE51851-080R0,5	8	8,0	19	63	0.5	33.63
AFE51851-080R1,0	8	8,0	19	63	1.0	33.63
AFE51851-080R1,5	8	8,0	19	63	1.5	33.63
AFE51851-080R2,0	8	8,0	19	63	2.0	33.63
AFE51851-100R0,5	10	10,0	22	72	0.5	52.94
AFE51851-100R1,0	10	10,0	22	72	1.0	52.94
AFE51851-100R1,5	10	10,0	22	72	1.5	52.94
AFE51851-100R2,0	10	10,0	22	72	2.0	52.94
AFE51851-120R0,5	12	12,0	26	83	0.5	75.21
AFE51851-120R1,0	12	12,0	26	83	1.0	75.21
AFE51851-120R1,5	12	12,0	26	83	1.5	75.21
AFE51851-120R2,0	12	12,0	26	83	2.0	75.21
AFE51851-120R2,5	12	12,0	26	83	2.5	75.21
AFE51851-120R3,0	12	12,0	26	83	3.0	75.21
AFE51851-160R1,0	16	16,0	36	92	1.0	133.41
AFE51851-160R1,5	16	16,0	36	92	1.5	133.41
AFE51851-160R2,0	16	16,0	36	92	2.0	133.41
AFE51851-160R2,5	16	16,0	36	92	2.5	133.41
AFE51851-160R3,0	16	16,0	36	92	3.0	133.41
AFE51851-160R4,0	16	16,0	36	92	4.0	133.41
AFE51851-200R1,0	20	20,0	44	104	1.0	219.41
AFE51851-200R1,5	20	20,0	44	104	1.5	219.41
AFE51851-200R2,0	20	20,0	44	104	2.0	219.41
AFE51851-200R2,5	20	20,0	44	104	2.5	219.41
AFE51851-200R3,0	20	20,0	44	104	3.0	219.41
AFE51851-200R4,0	20	20,0	44	104	4.0	219.41
AFE51851-200R5,0	20	20,0	44	104	5.0	219.41
AFE51851-250R1,0	25	25,0	54	121	1.0	287.13
AFE51851-250R1,5	25	25,0	54	121	1.5	287.13
AFE51851-250R2,0	25	25,0	54	121	2.0	287.13
AFE51851-250R2,5	25	25,0	54	121	2.5	287.13



Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	R	PG 24 / Price in £ HC
						£200
AFE51851-250R3,0	25	25,0	54	121	3.0	287.13
AFE51851-250R4,0	25	25,0	54	121	4.0	287.13
AFE51851-250R5,0	25	25,0	54	121	5.0	287.13

HC = Carbide coated



P	<input type="radio"/>
M	<input checked="" type="radio"/>
K	<input type="radio"/>
N	<input type="radio"/>
S	<input checked="" type="radio"/>
H	<input type="radio"/>

● Main application
○ Secondary application



AFE52451-...R...

5 flutes, long design with corner radius

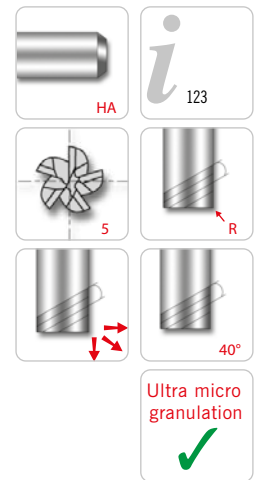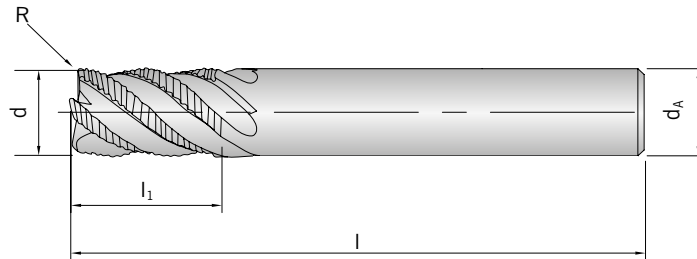

Shank DIN 6535HA	d h10	d _A h6	l ₁	l	R	PG 24 / Price in £ HC
						TiAlN
AFE52451-060R0,2	6	6,0	16	57	0.2	40.47
AFE52451-080R0,2	8	8,0	16	63	0.2	48.80
AFE52451-100R0,3	10	10,0	22	72	0.3	69.17
AFE52451-120R0,3	12	12,0	26	83	0.3	86.77
AFE52451-140R0,3	14	14,0	26	83	0.3	105.30
AFE52451-160R0,3	16	16,0	32	92	0.3	140.77
AFE52451-200R0,3	20	20,0	38	104	0.3	220.85
AFE52451-250R0,3	25	25,0	45	121	0.3	397.55

HC = Carbide coated





P	
M	●
K	
N	
S	●
H	

● Main application
○ Secondary application







AFE

Carbon steel < 300 Brinell 1.1191 (C45) • 1.0726 (35 S 20) • 1.0715 (9 SMn 28) • 1.0718 (9 SMnPb 28)							Carbon steel > 300 / < 380 Brinell 1.2330 (35 CrMo 4) • 1.6565 (40NiCrMo6) • 1.7033 (34Cr4) • 1.6523 (21 NiCrMo2)					
Side cutting Ap 1 x d / Ae 0,4 x d Vc = 128 - 160 - 192 m/min				Slotting Ap 1 x d / Ae 1 x d Vc = 100 - 125 - 150 m/min			Side cutting Ap 1 x d / Ae 0,4 x d Vc = 120 - 150 - 180 m/min			Slotting Ap 1 x d / Ae 1 x d Vc = 96 - 120 - 144 m/min		
d (mm)	RPM (U/min)	Fz (mm/Zahn)	FEED (mm/min)	RPM (U/min)	Fz (mm/Zahn)	FEED (mm/min)	RPM (U/min)	Fz (mm/Zahn)	FEED (mm/min)	RPM (U/min)	Fz (mm/Zahn)	FEED (mm/min)
6	8488	0,027	917	6631	0,025	663	7958	0,025	796	6366	0,025	637
8	6366	0,035	891	4974	0,034	676	5968	0,035	836	4775	0,034	649
10	5093	0,042	856	3979	0,042	668	4775	0,042	802	3820	0,042	642
12	4244	0,053	900	3316	0,049	650	3979	0,049	780	3183	0,049	624
14	3638	0,058	844	2842	0,056	637	3410	0,056	764	2728	0,056	611
16	3183	0,063	802	2487	0,063	627	2984	0,063	752	2387	0,063	602
20	2546	0,077	784	1989	0,07	557	2387	0,070	668	1910	0,07	535
25	2037	0,084	684	1592	0,084	535	1910	0,084	642	1528	0,077	471



Tool steels > 380 Brinell 1.2363 (X100 CrMoV 5 1) • 1.2379 (X155 CrV Mo 12 1) • 1.2344 (X40 CrMoV 5 1) • 1.3243 (S 6-5-2-5)							Cast iron < 280 Brinell 0.6020 (GG20) • 0.8145 (GTS-45-06) • 0.7060 (GGG-60)					
Side cutting Ap 1 x d / Ae 0,4 x d Vc = 120 - 150 - 180 m/min				Slotting Ap 1 x d / Ae 1 x d Vc = 96 - 120 - 144 m/min			Side cutting Ap 1 x d / Ae 0,4 x d Vc = 140 - 175 - 210 m/min			Slotting Ap 1 x d / Ae 1 x d Vc = 112 - 140 - 168 m/min		
d (mm)	RPM (U/min)	Fz (mm/Zahn)	FEED (mm/min)	RPM (U/min)	Fz (mm/Zahn)	FEED (mm/min)	RPM (U/min)	Fz (mm/Zahn)	FEED (mm/min)	RPM (U/min)	Fz (mm/Zahn)	FEED (mm/min)
6	7958	0,027	859	6366	0,027	688	9284	0,021	780	7427	0,021	624
8	5968	0,035	836	4775	0,035	668	6963	0,028	780	5570	0,028	624
10	4775	0,046	879	3820	0,042	642	5570	0,035	780	4456	0,035	624
12	3979	0,053	844	3183	0,053	675	4642	0,042	780	3714	0,042	624
14	3410	0,06	819	2728	0,058	633	3979	0,048	764	3183	0,048	611
16	2984	0,067	800	2387	0,063	602	3482	0,053	738	2785	0,053	590
20	2387	0,077	735	1910	0,077	588	2785	0,06	668	2228	0,06	535
25	1910	0,084	642	1528	0,084	513	2228	0,07	624	1783	0,067	478







The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application. Finish cuts typically require reduced feed rates and/or higher spindle speed, with radial width of 2% x d1 or less. Reduce speed and feed recommendations for materials harder than listed.







AFE

Stainless steel 300							Stainless steel 400					
1.4301(X5 CrNi 18 10) • 1.4436(X3 CrNiMo 17 13 3) • 1.4306(X2 CrNi 19 11) • 1.4435(X2 CrNiMo 18 14 3)							1.4005(X12 CrS 13) • 1.4104(X14 CrMoS 17)					
Side cutting			Slotting				Side cutting			Slotting		
Ap 1 x d / Ae 0,4 x d			Ap 1 x d / Ae 1 x d				Ap 1 x d / Ae 0,4 x d			Ap 1 x d / Ae 1 x d		
Vc = 84 - 105 - 126 m/min			Vc = 68 - 85 - 102 m/min				Vc = 124 - 155 - 186 m/min			Vc = 100 - 125 - 150 m/min		
d	RPM	Fz	FEED	RPM	Fz	FEED	RPM	Fz	FEED	RPM	Fz	FEED
(mm)	(U/min)	(mm/Zahn)	(mm/min)	(U/min)	(mm/Zahn)	(mm/min)	(U/min)	(mm/Zahn)	(mm/min)	(U/min)	(mm/Zahn)	(mm/min)
6	5570	0,025	550	4509	0,025	446	8223	0,034	1125	6631	0,034	907
8	4178	0,034	572	3382	0,034	463	6167	0,046	1125	4974	0,046	907
10	3342	0,042	559	2706	0,042	452	4934	0,057	1125	3979	0,057	907
12	2785	0,048	529	2255	0,048	428	4112	0,067	1094	3316	0,067	882
14	2387	0,055	525	1933	0,056	425	3524	0,076	1071	2842	0,074	841
16	2089	0,062	516	1691	0,062	418	3084	0,086	1055	2487	0,081	803
20	1671	0,071	476	1353	0,071	386	2467	0,095	937	1989	0,095	756
25	1337	0,081	432	1082	0,081	350	1974	0,114	900	1592	0,105	665





Stainless steel PH							Titanium					
1.4594(27 CNU 1505)							Ti6Al4V • Ti5Al5V5Mo • Ti7Al4Mo					
Side cutting			Slotting				Side cutting			Slotting		
Ap 1 x d / Ae 0,4 x d			Ap 1 x d / Ae 1 x d				Ap 1 x d / Ae 0,4 x d			Ap 1 x d / Ae 1 x d		
Vc = 35 - 44 - 53 m/min			Vc = 29 - 36 - 43 m/min				Vc = 56 - 70 - 84 m/min			Vc = 44 - 55 - 66 m/min		
d	RPM	Fz	FEED	RPM	Fz	FEED	RPM	Fz	FEED	RPM	Fz	FEED
(mm)	(U/min)	(mm/Zahn)	(mm/min)	(U/min)	(mm/Zahn)	(mm/min)	(U/min)	(mm/Zahn)	(mm/min)	(U/min)	(mm/Zahn)	(mm/min)
6	2334	0,016	151	1910	0,016	123	3714	0,034	508	2918	0,034	399
8	1751	0,021	146	1432	0,021	120	2785	0,048	529	2188	0,046	399
10	1401	0,027	149	1146	0,027	122	2228	0,057	508	1751	0,057	399
12	1167	0,032	151	955	0,032	123	1857	0,067	494	1459	0,067	388
14	1000	0,036	144	819	0,036	118	1592	0,076	484	1251	0,076	380
16	875	0,04	140	716	0,04	114	1393	0,086	476	1094	0,086	374
20	700	0,046	128	573	0,046	105	1114	0,095	423	875	0,095	333
25	560	0,052	117	458	0,052	96	891	0,114	406	700	0,105	293



The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application. Finish cuts typically require reduced feed rates and/or higher spindle speed, with radial width of 2% x d1 or less. Reduce speed and feed recommendations for materials harder than listed.



High Temperature Alloys						
RENE • INCONEL • WASPALOY • HASTELLOY						
Side cutting			Slotting			
Ap 0,6 x d / Ae 0,3 x d			Ap 0,4 x d / Ae 1 x d			
Vc = 26 - 32 - 38 m/min			Vc = 20 - 55 - 30 m/min			
d	RPM	Fz	FEED	RPM	Fz	FEED
(mm)	(U/min)	(mm/Zahn)	(mm/min)	(U/min)	(mm/Zahn)	(mm/min)
6	1698	0,02	136	1326	0,018	95
8	1273	0,026	132	995	0,024	95
10	1019	0,032	130	796	0,03	95
12	849	0,038	129	663	0,036	95
14	728	0,044	128	568	0,04	91
16	637	0,048	122	497	0,044	88
20	509	0,055	112	398	0,05	80
25	407	0,065	106	318	0,055	70







The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application. Finish cuts typically require reduced feed rates and/or higher spindle speed, with radial width of 2% x d1 or less. Reduce speed and feed recommendations for materials harder than listed.






AFE

Carbon steel < 300 Brinell 1.1191 (C45) • 1.0726 (35 S 20) • 1.0715 (9 SMn 28) • 1.0718 (9 SMnPb 28)				Carbon steel > 300 / < 380 Brinell 1.2330 (35 CrMo 4) • 1.6565 (40NiCrMo6) • 1.7033 (34Cr4) • 1.6523 (21 NiCrMo2)				Tool steels > 380 Brinell 1.2363 (X100 CrMoV 5 1) • 1.2379 (X155 CrVMo 12 1) • 1.2344 (X40 CrMoV 5 1) • 1.3243 (S 6-5-2-5)				Cast iron < 260 Brinell 0.6020 (GG20) 0.8145 (GTS-45-06) 0.7060 (GGG-60)			
Side cutting Ap 1,5 x d / Ae 0,3 x d Vc = 115 - 144 - 173 m/min				Side cutting Ap 1,5 x d / Ae 0,3 x d Vc = 81 - 101 - 121 m/min				Side cutting Ap 1,5 x d / Ae 0,3 x d Vc = 48 - 60 - 72 m/min				Side cutting Ap 1,5 x d / Ae 0,3 x d Vc = 85 - 106 - 127 m/min			
d (mm)	RPM (U/min)	Fz (mm/Zahn)	FEED (mm/min)	RPM (U/min)	Fz (mm/Zahn)	FEED (mm/min)	RPM (U/min)	Fz (mm/Zahn)	FEED (mm/min)	RPM (U/min)	Fz (mm/Zahn)	FEED (mm/min)			
6	7639	0,034	1299	5358	0,034	911	3183	0,024	382	5623	0,043	1209			
8	5730	0,038	1089	4019	0,038	764	2387	0,027	322	4218	0,048	1012			
10	4584	0,050	1146	3215	0,050	804	1910	0,035	334	3374	0,063	1063			
12	3820	0,063	1203	2679	0,063	844	1592	0,044	350	2812	0,079	1111			
14	3274	0,069	1130	2296	0,069	792	1364	0,049	334	2410	0,087	1048			
16	2865	0,076	1089	2009	0,076	764	1194	0,054	322	2109	0,096	1012			
18	2546	0,083	1057	1786	0,083	741	1061	0,058	308	1874	0,103	965			
20	2292	0,089	1020	1607	0,089	715	955	0,062	296	1687	0,111	936			
25	1833	0,101	926	1286	0,101	649	764	0,071	271	1350	0,126	850			



Stainless steel 300 1.4301(X5 CrNi 18 10) • 1.4436(X3 CrNiMo 17 13 3) • 1.4306(X2 CrNi 19 11) • 1.4435(X2 CrNiMo 18 14 3)				Stainless steel 400 1.4005(X12 CrS 13) 1.4104(X14 CrMoS 17)				Stainless steel PH 1.4594(27 CNU 1505)				Titanium Ti6Al4V • Ti5Al5V5Mo • Ti7Al4Mo			
Side cutting Ap 1,5 x d / Ae 0,3 x d Vc = 66 - 82 - 98 m/min				Side cutting Ap 1,5 x d / Ae 0,3 x d Vc = 94 - 117 - 140 m/min				Side cutting Ap 1,5 x d / Ae 0,3 x d Vc = 47 - 59 - 71 m/min				Side cutting Ap 1,5 x d / Ae 0,3 x d Vc = 55 - 69 - 83 m/min			
d (mm)	RPM (U/min)	Fz (mm/Zahn)	FEED (mm/min)	RPM (U/min)	Fz (mm/Zahn)	FEED (mm/min)	RPM (U/min)	Fz (mm/Zahn)	FEED (mm/min)	RPM (U/min)	Fz (mm/Zahn)	FEED (mm/min)			
6	4350	0,030	653	6207	0,024	745	3130	0,03	470	3661	0,027	494			
8	3263	0,032	522	4655	0,025	582	2348	0,032	376	2745	0,029	398			
10	2610	0,038	496	3724	0,03	559	1878	0,038	357	2196	0,034	373			
12	2175	0,063	685	3104	0,046	714	1565	0,063	493	1830	0,057	522			
14	1864	0,065	606	2660	0,051	678	1341	0,065	436	1569	0,059	463			
16	1631	0,069	563	2328	0,054	628	1174	0,069	405	1373	0,062	426			
18	1450	0,070	508	2069	0,057	590	1043	0,07	365	1220	0,063	384			
20	1305	0,076	496	1862	0,061	568	939	0,076	357	1098	0,069	379			
25	1044	0,088	459	1490	0,071	529	751	0,088	331	879	0,079	347			



The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application. Finish cuts typically require reduced feed rates and/or higher spindle speed, with radial width of 2% x d1 or less. Reduce speed and feed recommendations for materials harder than listed.



High Temperature Alloys


- RENE
- INCONEL
- WASPALLOY
- HASTELLOY

Side cutting

A_p 1,5 x d / A_e 0,1 x d

V_c = 25 - 31 - 37 m/min

d (mm)	RPM (U/min)	Fz (mm/Zahn)	FEED (mm/min)
6	1645	0,021	173
8	1233	0,022	136
10	987	0,027	133
12	822	0,044	181
14	705	0,046	162
16	617	0,048	148
18	548	0,049	134
20	493	0,053	131
25	395	0,062	122






The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application. Finish cuts typically require reduced feed rates and/or higher spindle speed, with radial width of 2% x d1 or less. Reduce speed and feed recommendations for materials harder than listed.



Stainless steel				Titanium			High Temperature Alloys		
1.4005(X12 CrS 13) 1.4104(X14 CrMoS 17)				Ti6Al4V • Ti5Al5V5Mo • Ti7Al4Mo			Inconel		
Side cutting				Side cutting			Side cutting		
Ap: 1,5 x d				Ap: 1 x d			Ap 1 x d		
Ae: ø6 - ø10: 0.15 x d ø12 - ø16: 0,10 x d ø20 - ø25: 0.05 x d				Ae: ø6 - ø10: 0.15 x d ø12 - ø16: 0,10 x d ø20 - ø25: 0.05 x d			Ae: 0,05 x d		
Vc = 64 - 80 - 96 m/min				Vc = 52 - 65 - 78 m/min			Vc = 32 - 40 - 48 m/min		
d	RPM	Fz	FEED	RPM	Fz	FEED	RPM	Fz	FEED
(mm)	(U/min)	(mm/Zahn)	(mm/min)	(U/min)	(mm/Zahn)	(mm/min)	(U/min)	(mm/Zahn)	(mm/min)
6	4244	0,025	531	3448	0,022	379	2122	0,020	212
8	3183	0,034	541	2586	0,031	401	1592	0,025	199
10	2546	0,041	522	2069	0,038	393	1273	0,037	236
12	2122	0,051	541	1724	0,046	397	1061	0,040	212
14	1819	0,057	518	1478	0,052	384	909	0,046	209
16	1592	0,063	501	1293	0,058	375	796	0,052	207
20	1273	0,081	516	1035	0,074	383	637	0,061	194
25	1019	0,091	463	828	0,084	348	509	0,068	173


AFE



The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application. Finish cuts typically require reduced feed rates and/or higher spindle speed, with radial width of 2% x d1 or less. Reduce speed and feed recommendations for materials harder than listed.


For more information see

www.arno.de

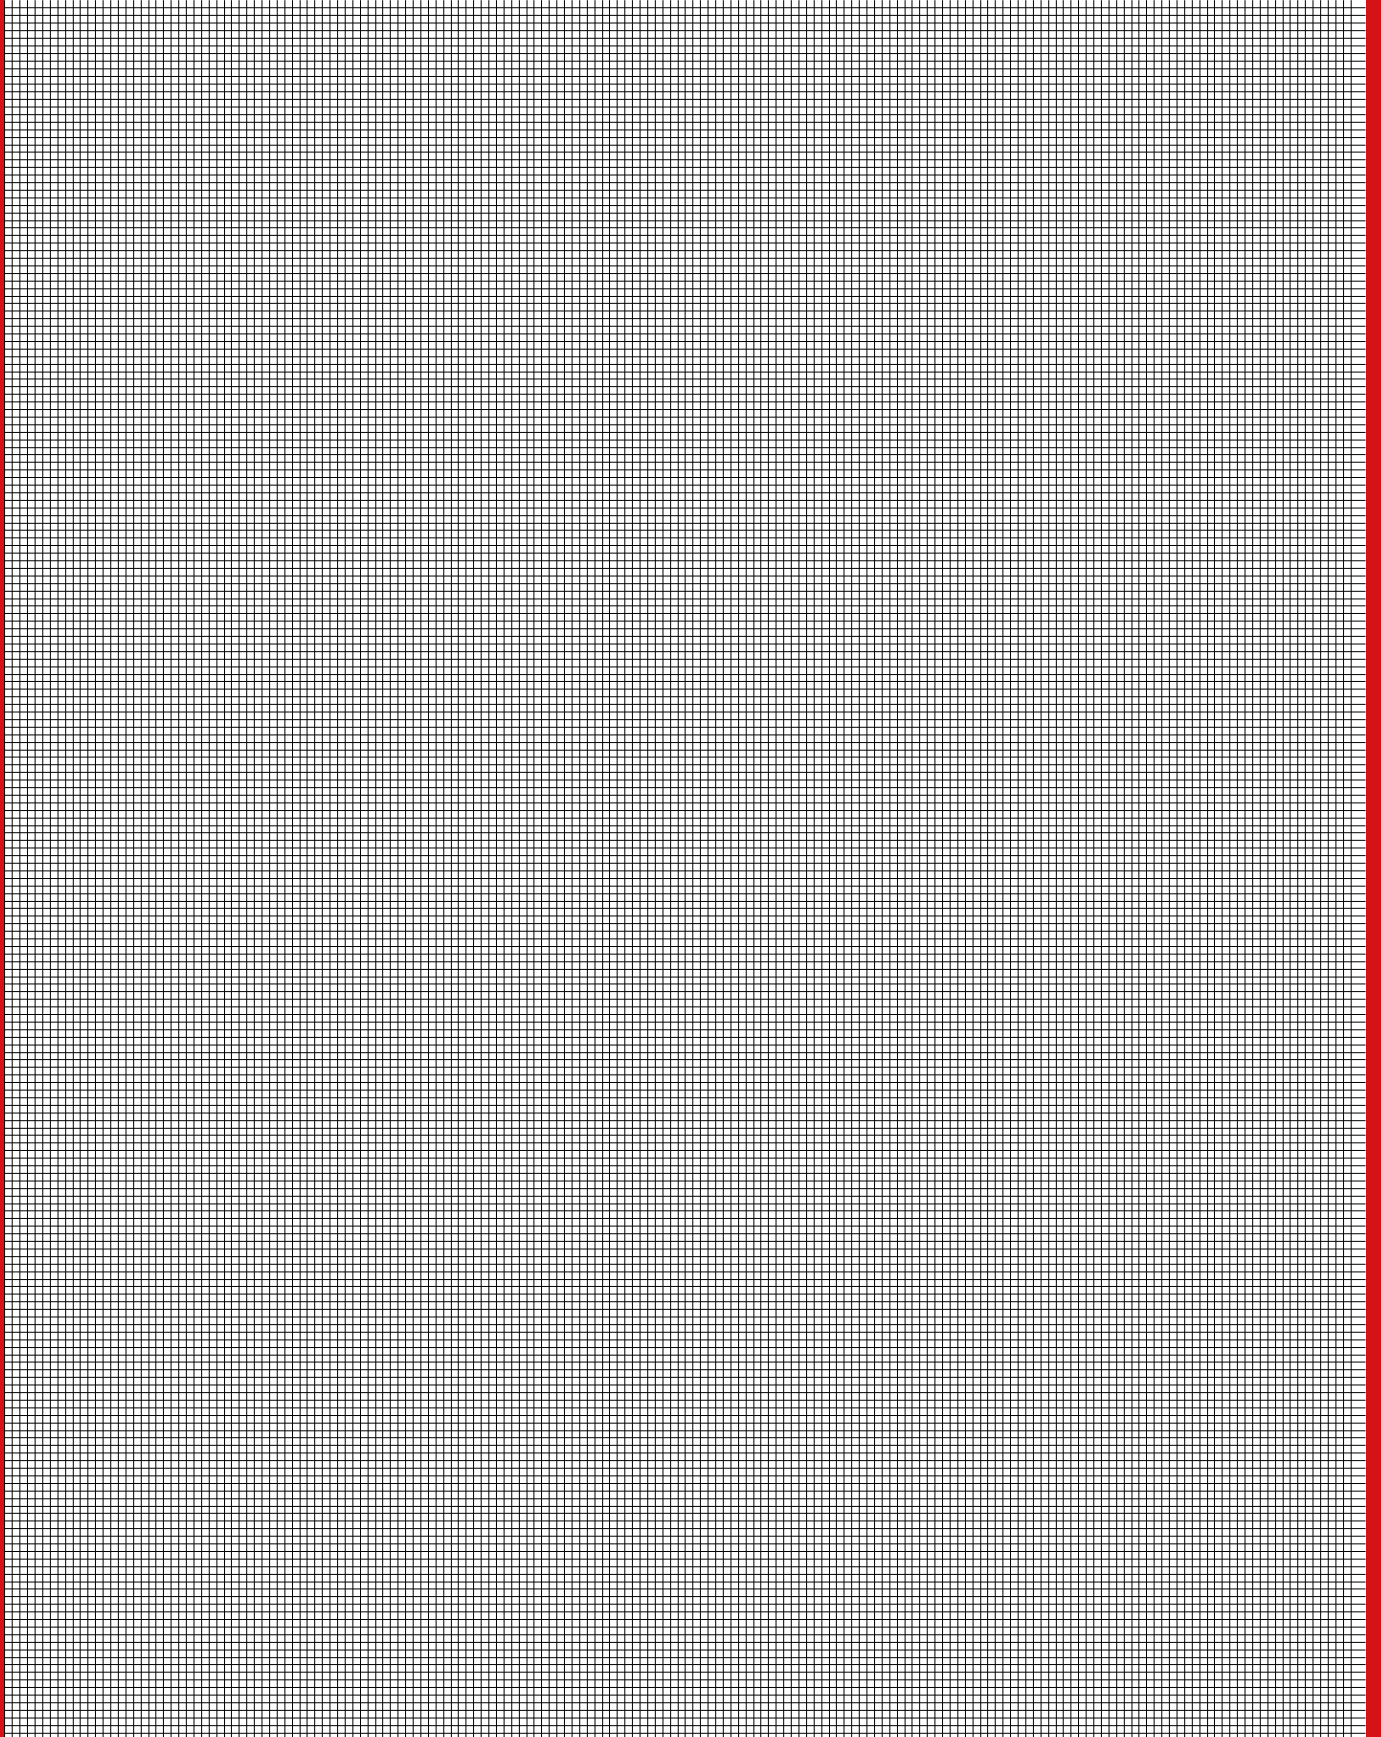



EXCELLENT FOR MACHINING STEEL AND HARDENED STEEL.

Not just for milling of alloy and non-alloy steel,
but also for hard steel (up to 50 HRC) as well
as other tough materials.
Also suitable for dry machining.

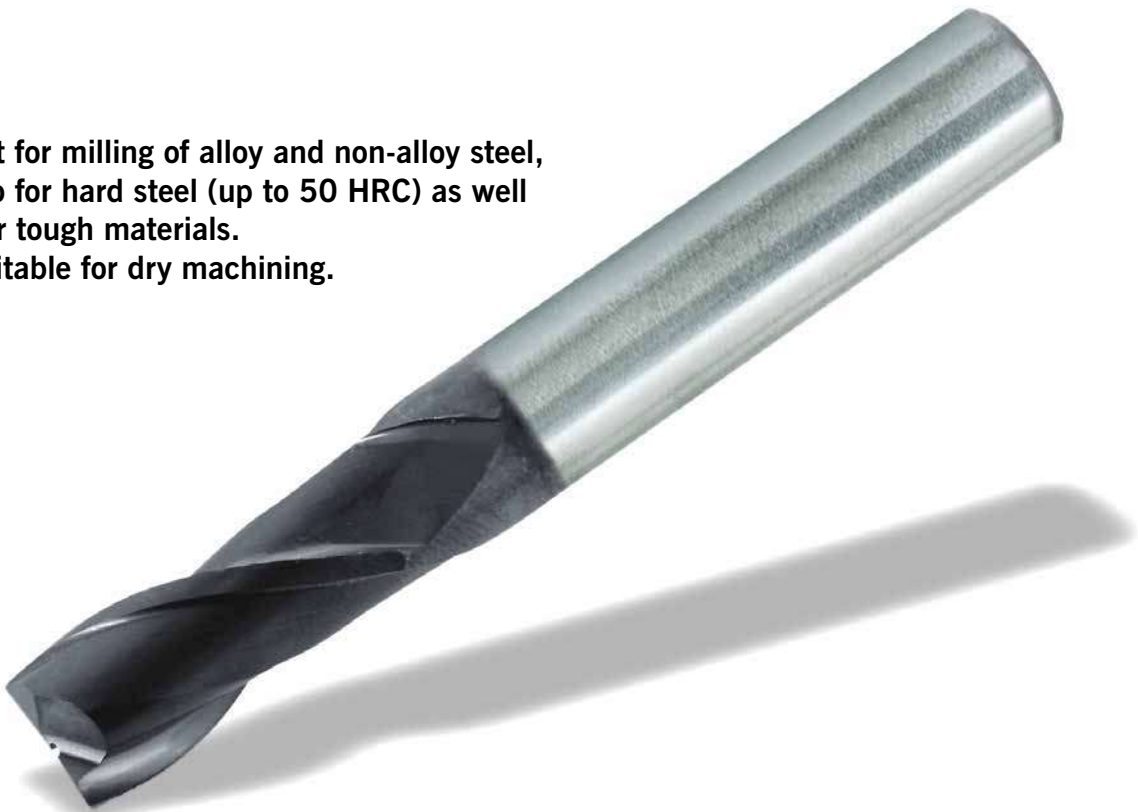



AFG50120-...
2 flutes, short design

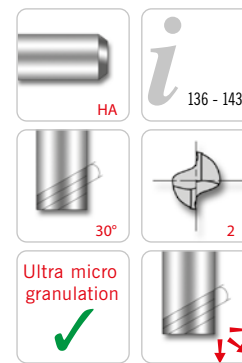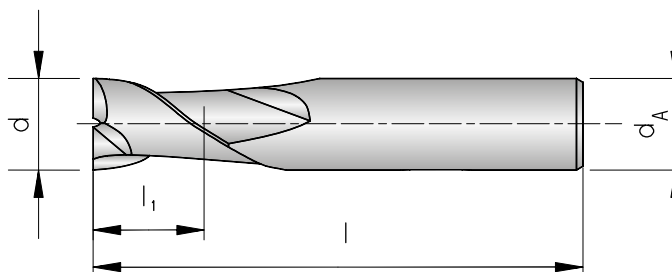

AFG

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AFG50120-020B	2	6	6	40	16.21
AFG50120-030	3	6	8	45	16.21
AFG50120-040	4	6	11	45	16.21
AFG50120-050	5	6	13	50	16.21
AFG50120-060	6	6	13	50	16.21
AFG50120-080	8	8	19	60	19.56
AFG50120-100	10	10	22	70	28.93
AFG50120-120	12	12	26	75	39.63
AFG50120-140	14	14	26	85	55.46
AFG50120-160	16	16	32	100	65.89
AFG50120-180	18	18	32	100	99.62
AFG50120-200	20	20	38	105	109.22
AFG50120-220	22	20	38	105	161.91
AFG50120-250	25	25	45	120	175.61



HC = Carbide coated

P	●
M	●
K	
N	
S	
H	○

● Main application
○ Secondary application



AFG50121-...
2 flutes, long design

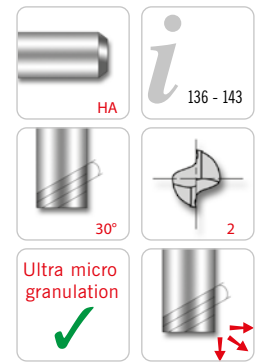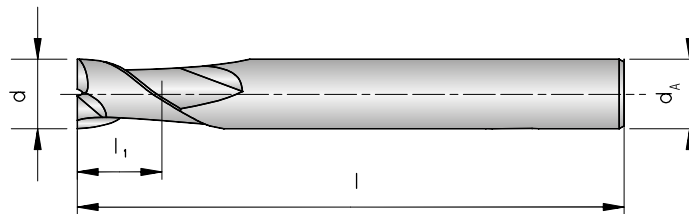

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AFG50121-020	2	4	8	40	13.39
AFG50121-030	3	6	12	50	19.40
AFG50121-040	4	6	15	50	19.40
AFG50121-050	5	6	20	60	19.40
AFG50121-060	6	6	20	60	19.40
AFG50121-080	8	8	25	70	23.39
AFG50121-100	10	10	30	90	34.80
AFG50121-120	12	12	30	90	47.67
AFG50121-140	14	16	40	110	77.50
AFG50121-160	16	16	50	110	88.97
AFG50121-180	18	20	50	110	137.79
AFG50121-200	20	20	55	110	147.18
AFG50121-250	25	25	75	140	235.82

HC = Carbide coated



P	●
M	●
K	
N	
S	
H	○

● Main application
○ Secondary application



AFG50321-...

2 flutes, long design

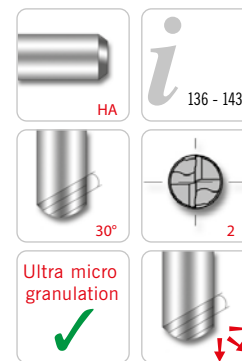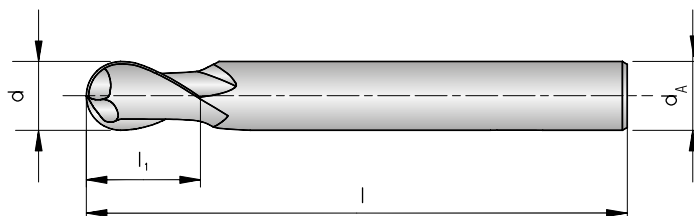

AFG

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	R	PG 24 / Price in £ HC
						TAIN
AFG50321-020	2	6	5	50	1.0	18.91
AFG50321-030	3	6	8	60	1.5	18.91
AFG50321-040	4	6	8	70	2.0	18.91
AFG50321-050	5	6	10	80	2.5	18.91
AFG50321-060	6	6	12	90	3.0	20.06
AFG50321-080	8	8	14	100	4.0	31.27
AFG50321-100	10	10	18	100	5.0	49.85
AFG50321-120	12	12	22	110	6.0	63.57
AFG50321-140	14	14	26	110	7.0	91.14
AFG50321-160	16	16	30	140	8.0	108.71
AFG50321-180	18	18	34	140	9.0	131.61
AFG50321-200	20	20	38	160	10.0	165.56
AFG50321-250	25	25	50	180	12.5	264.26



HC = Carbide coated

P	●
M	●
K	
N	
S	
H	○

● Main application
○ Secondary application



AFG50140-...
4 flutes, short design

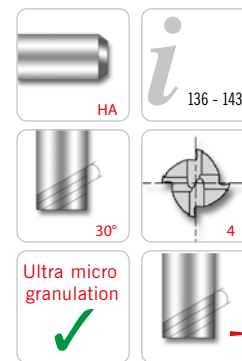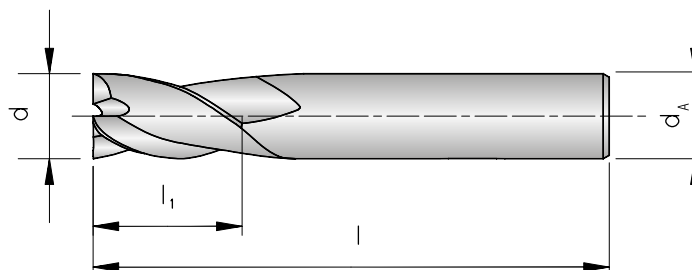

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AFG50140-020A	2.0	4	6	40	16.21
AFG50140-020B	2.0	6	6	40	16.21
AFG50140-025A	2.5	4	8	40	16.21
AFG50140-030	3.0	6	8	45	16.21
AFG50140-040	4.0	6	11	45	16.21
AFG50140-050	5.0	6	13	50	16.21
AFG50140-060	6.0	6	13	50	16.21
AFG50140-080	8.0	8	19	60	21.40
AFG50140-100	10.0	10	22	70	32.12
AFG50140-120	12.0	12	26	75	42.14
AFG50140-140	14.0	14	26	85	55.46
AFG50140-160	16.0	16	32	100	65.89
AFG50140-180	18.0	18	32	100	99.91
AFG50140-200	20.0	20	38	105	109.22
AFG50140-220	22.0	20	38	105	161.91
AFG50140-250	25.0	25	45	120	175.61



HC = Carbide coated

P	●
M	●
K	
N	
S	
H	○

● Main application
○ Secondary application



AFG60140-...
4 flutes, short design

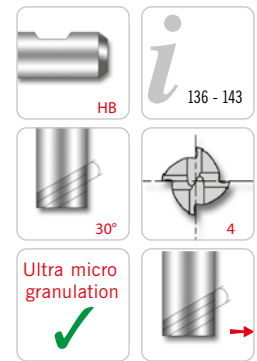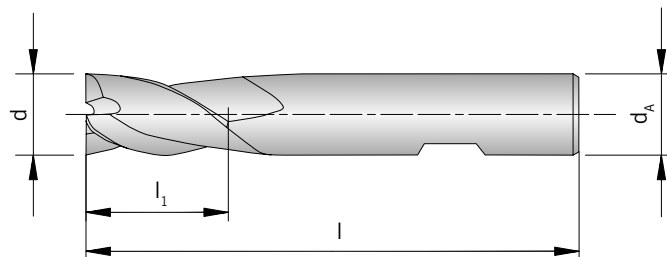

AFG

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AFG60140-020B	2	6	6	40	16.21
AFG60140-030	3	6	8	45	16.21
AFG60140-040	4	6	11	45	16.21
AFG60140-050	5	6	13	50	16.21
AFG60140-060	6	6	13	50	16.21
AFG60140-080	8	8	19	60	21.40
AFG60140-100	10	10	22	70	32.12
AFG60140-120	12	12	26	75	42.14
AFG60140-140	14	14	26	85	55.46
AFG60140-160	16	16	32	100	65.89
AFG60140-180	18	18	32	100	99.91
AFG60140-200	20	20	38	105	109.22



HC = Carbide coated

P	●
M	●
K	
N	
S	
H	○

● Main application
○ Secondary application



AFG50141-...
4 flutes, long design

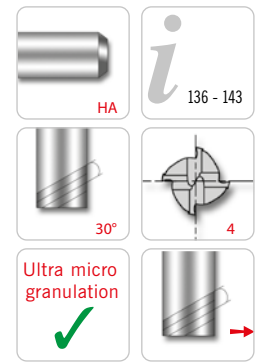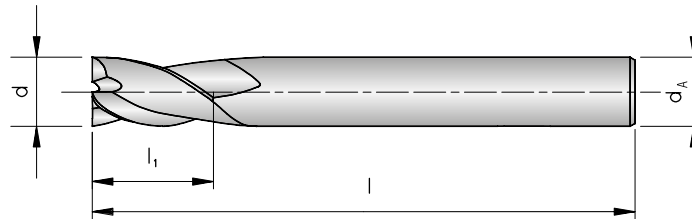

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AFG50141-020	2	4	8	40	14.87
AFG50141-030	3	6	12	50	19.40
AFG50141-040	4	6	15	50	19.40
AFG50141-050	5	6	20	60	19.40
AFG50141-060	6	6	20	60	19.40
AFG50141-080	8	8	25	70	23.59
AFG50141-100	10	10	30	90	35.12
AFG50141-120	12	12	30	90	47.67
AFG50141-140	14	16	40	110	77.50
AFG50141-160	16	16	50	110	88.63
AFG50141-180	18	20	50	110	137.97
AFG50141-200	20	20	55	110	147.18
AFG50141-250	25	25	75	140	235.82

HC = Carbide coated



P	●
M	●
K	
N	
S	
H	○

● Main application
○ Secondary application



AFG502.0-...

4 - 8 flutes, long design

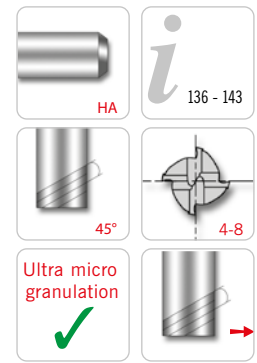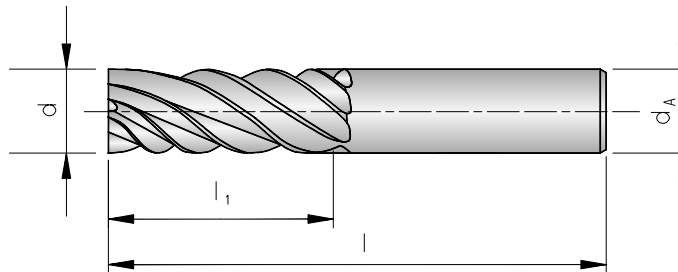

AFG

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	z	PG 24 / Price in £ HC
						TAIN
AFG50240-040	4	6	11	57	4	16.21
AFG50260-060	6	6	13	57	6	16.21
AFG50260-080	8	8	19	63	6	19.06
AFG50260-100	10	10	22	72	6	32.61
AFG50260-120	12	12	26	83	6	38.80
AFG50260-140	14	14	26	83	6	65.79
AFG50260-160	16	16	32	92	6	59.88
AFG50280-180	18	18	32	92	8	103.34
AFG50280-200	20	20	38	104	8	97.18
AFG50280-250	25	25	44	104	8	229.11

HC = Carbide coated



P	●
M	●
K	
N	
S	
H	○

● Main application
○ Secondary application



AFG50262-...

6 flutes, extra long design

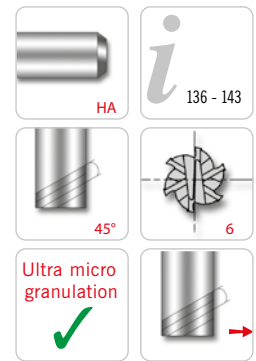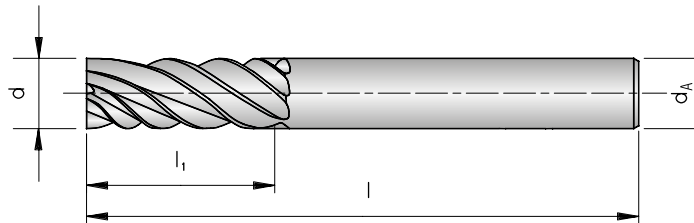

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TiAIN
AFG50262-060	6	6	26	70	17.39
AFG50262-080	8	8	36	90	20.06
AFG50262-100	10	10	46	100	34.80
AFG50262-120	12	12	56	110	41.16
AFG50262-160	16	16	66	130	67.72
AFG50262-200	20	20	76	140	107.69
AFG50262-250	25	25	92	180	218.75

HC = Carbide coated



P	●
M	●
K	
N	
S	
H	○

● Main application
○ Secondary application



AFG60262-...

6 flutes, extra long design

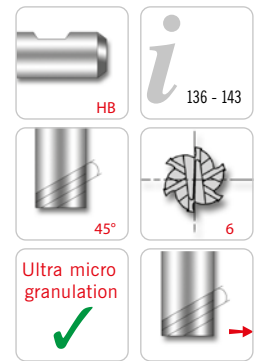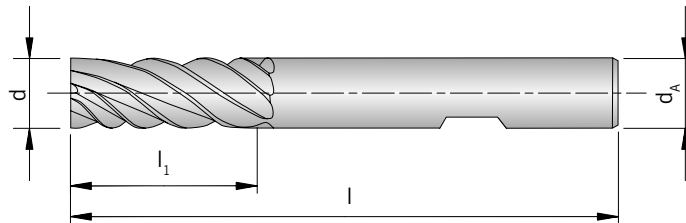

AFG

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					TAIN
AFG60262-060	6	6	26	70	17.39
AFG60262-080	8	8	36	90	20.06
AFG60262-100	10	10	46	100	34.80
AFG60262-120	12	12	56	110	41.16
AFG60262-160	16	16	66	130	67.72
AFG60262-200	20	20	76	140	107.69
AFG60262-250	25	25	92	180	218.75

HC = Carbide coated



P	●
M	●
K	
N	
S	
H	○

● Main application
○ Secondary application



AFG606.1-...

3 - 5 flutes, long design

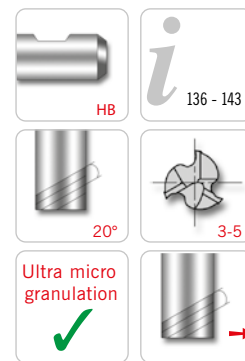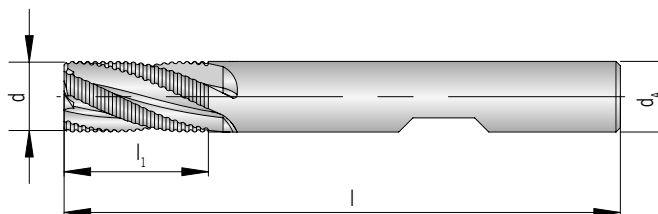

Shank DIN 6535HB	d h10	d _A h6	l ₁	l	z	PG 24 / Price in £ HC
						TAIN
AFG60631-040	4	6	11	57	3	34.12
AFG60631-050	5	6	13	57	3	34.12
AFG60631-060	6	6	16	57	3	33.46
AFG60631-070	7	8	16	63	3	36.81
AFG60631-080	8	8	16	63	3	38.15
AFG60641-090	9	10	19	72	4	55.00
AFG60641-100	10	10	22	72	4	53.84
AFG60641-120	12	12	26	83	4	64.22
AFG60641-140	14	14	26	83	4	92.84
AFG60641-160	16	16	32	92	4	100.68
AFG60641-180	18	18	32	92	4	159.82
AFG60641-200	20	20	38	104	4	144.16
AFG60651-250	25	25	45	121	5	191.01

HC = Carbide coated

P	●
M	●
K	
N	
S	
H	○

● Main application
○ Secondary application



Material group	Structure of the material groups and identification letters		Brinell hardness HB	Tensile strength Rm (N/mm ²)	Chipping group	Correction factor	Cutting speed V _c (m/min)	
							VHM	TAIN
P	Unalloyed steel	C ≤ 0.25 % annealed	125	428	P1	1,2	100 - 170 - 240	
		C > 0.25 ... ≤ 0.55 % annealed	190	639	P2	1,2	100 - 170 - 240	
		C > 0.25 ... ≤ 0.55 % hardened and tempered	210	708	P3	1,2	90 - 155 - 220	
		C > 0.55 % annealed	190	639	P4	1,2	100 - 170 - 240	
		C > 0.55 % hardened and tempered	300	1013	P5	1,0	60 - 100 - 140	
		Machining steel (short-chipping) tempered	220	745	P6	1,2	100 - 170 - 240	
	Low alloyed steel	annealed	175	591	P7	1,2	90 - 145 - 200	
		hardened and tempered	300	1013	P8	1,0	90 - 145 - 200	
		hardened and tempered	380	1282	P9	0,8	60 - 90 - 120	
		hardened and tempered	430	1477	P10	0,8	60 - 90 - 120	
	High alloyed steel and high alloyed tool steel	annealed	200	675	P11	1,2	90 - 145 - 200	
		hardened	300	1013	P12	1,0	80 - 110 - 140	
		hardened	400	1361	P13	0,8	60 - 85 - 110	
	Stainless steel	ferritic / martensitic, annealed	200	675	P14	1,0	50 - 85 - 120	
		martensitic, hardened and tempered	330	1114	P15	0,9	30 - 55 - 80	
M	Stainless steel	austenitic, chilled	200	675	M1	1,0	60 - 90 - 120	
		austenitic, precipitation-hardened (PH)	300	1013	M2	0,9	30 - 55 - 80	
		austenitic-ferritic, Duplex	230	778	M3	1,0	50 - 85 - 120	
K	Malleable cast iron	ferritic	200	675	K1		-	
		pearlitic	260	867	K2		-	
	Cast iron	low tensile strength	180	602	K3		-	
		high tensile strength / austenitic	245	825	K4		-	
	Cast iron with nodular graphite	ferritic	155	518	K5		-	
		pearlitic	265	885	K6		-	
GGV (CGI)		200	675	K7		-		
N	Aluminium alloys long chipping	not heat treatable	30	-	N1		-	
		heat treatable, heat treated	100	343	N2		-	
	Casted aluminium alloys	≤ 12 % Si, not heat treatable	75	260	N3		-	
		≤ 12 % Si, aushärtbar, ausgehärtet	90	314	N4		-	
		> 12 % Si, not heat treatable	130	447	N5		-	
	Magnesium alloys		70	250	N6		-	
	Copper and copper alloys (Brass / Bronze)	Unalloyed, elektrolyte copper	100	343	N7		-	
		Brass, Bronze	90	314	N8		-	
		Cu-alloys, short-chipping	110	382	N9		-	
		High-tensile, Ampco	300	1013	N10		-	
Non-ferrous materials	Lead alloys (without abrasive filling material)	-	-	N11		-		
	Duroplastic (without abrasive filling material)	-	-	N12		-		
	Plastic glas fibre reinforced GFRP	-	-	N13		-		
	Plastic carbon fibre reinforced CFRP	-	-	N14		-		
	Plastic aramid fibre reinforced AFRP	-	-	N15		-		
	Graphite (tech.)	80 Shore	-	N16		-		
S	High temperature resistant alloys	Fe-Basis	annealed	200	675	S1		-
			heat treated	280	943	S2		-
		Ni- or Co-alloyed	annealed	250	839	S3		-
			heat treated	350	1177	S4		-
			casting	320	1076	S5		-
	Titanium alloys	Pure titan	200	675	S6		-	
		α- and β-alloys, heat treated	375	1262	S7		-	
		β-alloys	410	1396	S8		-	
	Wolfram alloys		300	1013	S9		-	
	Molybdän alloys		300	1013	S10		-	
H	Hardened steel	hardened	50 HRC	-	H1	0,7	20 - 70 - 120	
		hardened	55 HRC	-	H2	0,7	20 - 70 - 120	
		hardened	60 HRC	-	H3	1,1	12 - 36 - 60	
	Hardened cast iron	hardened	55 HRC	-	H4	0,7	20 - 70 - 120	


The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.



Feed per tooth with radial depth of cut from 0,2 – 0,3 mm

≤ 40 HRC

Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,004	0,003	0,003	0,004	0,004	0,005	0,006	0,006	0,007	0,008
2	0,008	0,006	0,006	0,007	0,009	0,010	0,012	0,013	0,014	0,015
3	0,012	0,008	0,010	0,011	0,013	0,014	0,018	0,019	0,022	0,023
4	0,016	0,011	0,013	0,014	0,018	0,019	0,024	0,026	0,029	0,030
5	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
6	0,024	0,017	0,019	0,022	0,026	0,029	0,036	0,038	0,043	0,046
8	0,032	0,022	0,026	0,029	0,035	0,038	0,048	0,051	0,058	0,061
10	0,040	0,028	0,032	0,036	0,044	0,048	0,060	0,064	0,072	0,076
12	0,048	0,034	0,038	0,043	0,053	0,058	0,072	0,077	0,086	0,091
14	0,056	0,039	0,045	0,050	0,062	0,067	0,084	0,090	0,101	0,106
16	0,064	0,045	0,051	0,058	0,070	0,077	0,096	0,102	0,115	0,122
18	0,072	0,050	0,058	0,065	0,079	0,086	0,108	0,115	0,130	0,137
20	0,080	0,056	0,064	0,072	0,088	0,096	0,120	0,128	0,144	0,152
22	0,090	0,060	0,070	0,080	0,095	0,110	0,130	0,140	0,160	0,170
25	0,100	0,070	0,080	0,090	0,110	0,120	0,150	0,160	0,180	0,190

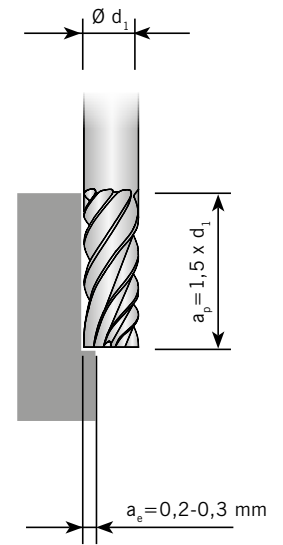


AFG

Feed per tooth with radial depth of cut of 10% of the cutter (Ø d1)

≤ 40 HRC

Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,003	0,002	0,002	0,003	0,003	0,004	0,005	0,005	0,005	0,006
2	0,008	0,006	0,006	0,007	0,009	0,010	0,012	0,013	0,014	0,015
3	0,012	0,008	0,010	0,011	0,013	0,014	0,018	0,019	0,022	0,023
4	0,014	0,010	0,011	0,013	0,015	0,017	0,021	0,022	0,025	0,027
5	0,017	0,012	0,014	0,015	0,019	0,020	0,026	0,027	0,031	0,032
6	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
8	0,027	0,019	0,022	0,024	0,030	0,032	0,041	0,043	0,049	0,051
10	0,033	0,023	0,026	0,030	0,036	0,040	0,050	0,053	0,059	0,063
12	0,040	0,028	0,032	0,036	0,044	0,048	0,060	0,064	0,072	0,076
14	0,047	0,033	0,038	0,042	0,052	0,056	0,071	0,075	0,085	0,089
16	0,053	0,037	0,042	0,048	0,058	0,064	0,080	0,085	0,095	0,101
18	0,060	0,042	0,048	0,054	0,066	0,072	0,090	0,096	0,108	0,114
20	0,067	0,047	0,054	0,060	0,074	0,080	0,101	0,107	0,121	0,127
25	0,083	0,058	0,066	0,075	0,091	0,100	0,125	0,133	0,149	0,158

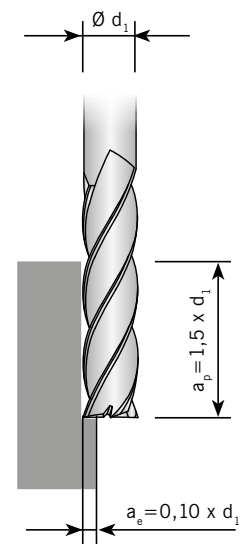


Attention: Take the correction factor from the table "Cutting speeds".
Correction factor -> 1,1 with $a_p = 1 \times d_1$ -> 1,2 with $a_p = 0,5 \times d_1$



Feed per tooth with radial depth of cut of 20% of the cutter ($\varnothing d_1$)

≤ 40 HRC

$\varnothing d_1$ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,002	0,001	0,001	0,001	0,002	0,002	0,003	0,003	0,003	0,003
2	0,005	0,003	0,004	0,004	0,005	0,006	0,007	0,008	0,009	0,009
3	0,008	0,005	0,006	0,007	0,008	0,009	0,012	0,012	0,014	0,015
4	0,010	0,007	0,008	0,009	0,011	0,012	0,015	0,016	0,018	0,019
5	0,013	0,009	0,010	0,011	0,014	0,015	0,019	0,020	0,023	0,024
6	0,015	0,010	0,012	0,013	0,016	0,018	0,022	0,024	0,027	0,028
8	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
10	0,025	0,017	0,020	0,022	0,027	0,030	0,037	0,040	0,045	0,047
12	0,030	0,021	0,024	0,027	0,033	0,036	0,045	0,048	0,054	0,057
14	0,035	0,024	0,028	0,031	0,038	0,042	0,052	0,056	0,063	0,066
16	0,040	0,028	0,032	0,036	0,044	0,048	0,060	0,064	0,072	0,076
18	0,045	0,031	0,036	0,040	0,049	0,054	0,067	0,072	0,081	0,085
20	0,050	0,035	0,040	0,045	0,055	0,060	0,075	0,080	0,090	0,095
22	0,055	0,040	0,045	0,050	0,060	0,065	0,080	0,090	0,100	0,100
25	0,063	0,044	0,050	0,056	0,069	0,075	0,094	0,100	0,113	0,119

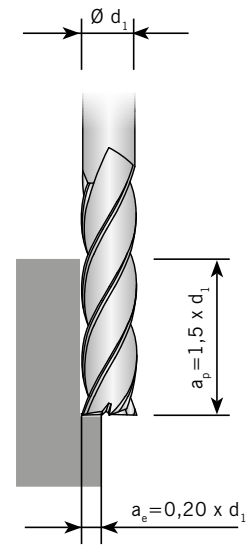


AFG

Feed per tooth with radial depth of cut of 40% of the cutter ($\varnothing d_1$)

≤ 40 HRC

$\varnothing d_1$ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,001	0,002	0,002	0,002	0,003
2	0,004	0,002	0,003	0,003	0,004	0,004	0,006	0,006	0,007	0,007
3	0,006	0,004	0,005	0,005	0,007	0,007	0,009	0,010	0,011	0,012
4	0,008	0,005	0,006	0,007	0,008	0,009	0,012	0,012	0,014	0,015
5	0,010	0,007	0,008	0,009	0,011	0,012	0,015	0,016	0,018	0,019
6	0,012	0,008	0,009	0,010	0,013	0,014	0,018	0,019	0,021	0,022
8	0,016	0,011	0,012	0,014	0,017	0,019	0,024	0,025	0,028	0,030
10	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
12	0,024	0,016	0,019	0,021	0,026	0,028	0,036	0,038	0,043	0,045
14	0,028	0,019	0,022	0,025	0,030	0,033	0,042	0,044	0,050	0,053
16	0,032	0,022	0,025	0,028	0,035	0,038	0,048	0,051	0,057	0,060
18	0,036	0,025	0,028	0,032	0,039	0,043	0,054	0,057	0,064	0,068
20	0,040	0,028	0,032	0,036	0,044	0,048	0,060	0,064	0,072	0,076
22	0,045	0,030	0,035	0,040	0,045	0,050	0,065	0,070	0,080	0,085
25	0,050	0,035	0,040	0,045	0,055	0,060	0,075	0,080	0,090	0,095

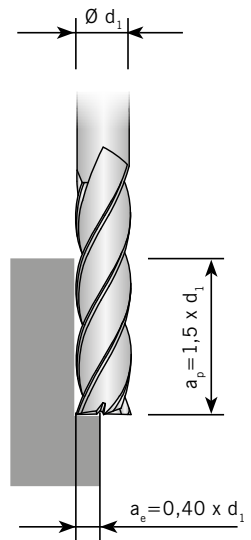


Attention: Feed rate correction factor → Kf $f_z = 1,10$ with $a_p = 1 \times d_1$ and → Kf $f_z = 1,25$ with $a_p = 0,5 \times d_1$. Feed rates are reduced by 10-20% for uncoated tools.



Feed per tooth with radial depth of cut of 60% of the cutter ($\varnothing d_1$)

≤ 40 HRC

$\varnothing d_1$ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,002	0,002	0,002
2	0,003	0,002	0,002	0,002	0,003	0,003	0,004	0,005	0,005	0,006
3	0,005	0,003	0,004	0,004	0,005	0,006	0,007	0,008	0,009	0,009
4	0,006	0,004	0,005	0,005	0,007	0,007	0,009	0,010	0,011	0,012
5	0,008	0,005	0,006	0,007	0,009	0,010	0,012	0,013	0,015	0,016
6	0,009	0,006	0,007	0,008	0,010	0,011	0,014	0,015	0,017	0,018
8	0,013	0,009	0,010	0,011	0,014	0,015	0,019	0,020	0,023	0,024
10	0,016	0,011	0,013	0,014	0,017	0,019	0,024	0,026	0,029	0,030
12	0,019	0,013	0,015	0,017	0,021	0,023	0,029	0,031	0,035	0,037
14	0,022	0,015	0,018	0,020	0,025	0,027	0,034	0,036	0,040	0,043
16	0,026	0,018	0,020	0,023	0,028	0,031	0,039	0,041	0,046	0,049
18	0,029	0,020	0,023	0,026	0,032	0,035	0,043	0,046	0,052	0,055
20	0,032	0,022	0,026	0,029	0,035	0,039	0,048	0,052	0,058	0,061
22	0,035	0,025	0,030	0,031	0,038	0,041	0,053	0,054	0,064	0,066
25	0,040	0,028	0,032	0,036	0,045	0,049	0,061	0,065	0,073	0,077

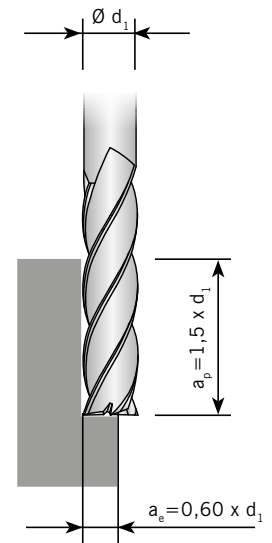


AFG

Feed per tooth with radial depth of cut of 80% of the cutter ($\varnothing d_1$)

≤ 40 HRC

$\varnothing d_1$ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001
2	0,002	0,001	0,002	0,002	0,002	0,003	0,003	0,004	0,004	0,004
3	0,004	0,002	0,003	0,003	0,004	0,004	0,006	0,006	0,007	0,007
4	0,005	0,003	0,004	0,004	0,005	0,006	0,007	0,008	0,009	0,009
5	0,006	0,004	0,005	0,005	0,007	0,007	0,009	0,010	0,011	0,012
6	0,007	0,005	0,006	0,006	0,008	0,009	0,011	0,012	0,013	0,014
8	0,010	0,007	0,008	0,009	0,011	0,012	0,015	0,016	0,018	0,019
10	0,012	0,008	0,010	0,011	0,013	0,015	0,018	0,020	0,022	0,023
12	0,015	0,010	0,012	0,013	0,016	0,018	0,022	0,024	0,027	0,028
14	0,017	0,012	0,014	0,015	0,019	0,021	0,026	0,028	0,031	0,033
16	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
18	0,022	0,015	0,018	0,020	0,024	0,027	0,033	0,036	0,040	0,042
20	0,025	0,017	0,020	0,022	0,027	0,030	0,037	0,040	0,045	0,047
22	0,030	0,020	0,020	0,024	0,030	0,031	0,040	0,045	0,050	0,050
25	0,031	0,022	0,025	0,028	0,034	0,037	0,047	0,050	0,056	0,059

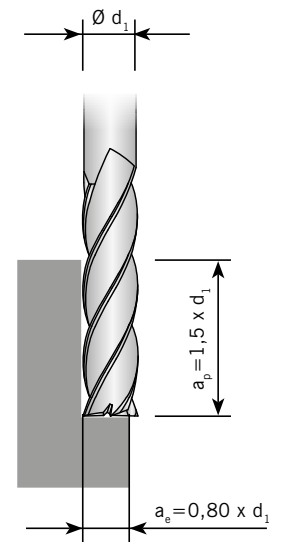


Attention: Feed rate correction factor → $Kf f_z = 1,10$ with $a_p = 1 \times d_1$ and → $Kf f_z = 1,25$ with $a_p = 0,5 \times d_1$. Feed rates are reduced by 10-20% for uncoated tools.



Feed per tooth when full slot milling → $a_p = 0,5 \times d_1$

≤ 40 HRC

Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,002	0,001	0,001	0,001	0,002	0,002	0,003	0,003	0,003	0,003
2	0,004	0,002	0,003	0,003	0,004	0,004	0,006	0,006	0,007	0,007
3	0,007	0,004	0,005	0,006	0,007	0,008	0,010	0,011	0,012	0,013
4	0,009	0,006	0,007	0,008	0,009	0,010	0,013	0,014	0,016	0,017
5	0,011	0,007	0,008	0,009	0,012	0,013	0,016	0,017	0,019	0,020
6	0,013	0,009	0,010	0,011	0,014	0,015	0,019	0,020	0,023	0,024
8	0,018	0,012	0,014	0,016	0,019	0,021	0,027	0,028	0,032	0,034
10	0,022	0,015	0,017	0,019	0,024	0,026	0,033	0,035	0,039	0,041
12	0,030	0,021	0,024	0,027	0,033	0,036	0,045	0,048	0,054	0,057
14	0,032	0,022	0,025	0,028	0,035	0,038	0,048	0,051	0,057	0,060
16	0,036	0,025	0,028	0,032	0,039	0,043	0,054	0,057	0,064	0,068
18	0,042	0,029	0,033	0,037	0,046	0,050	0,063	0,067	0,075	0,079
20	0,045	0,031	0,036	0,040	0,049	0,054	0,067	0,072	0,081	0,085
22	0,050	0,035	0,040	0,045	0,055	0,060	0,072	0,076	0,090	0,095
25	0,056	0,039	0,044	0,050	0,061	0,067	0,084	0,089	0,100	0,106

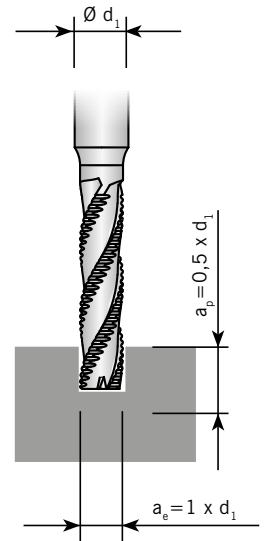


AFG

Feed per tooth when full slot milling → $a_p = 1 \times d_1$

≤ 40 HRC

Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,002	0,002	0,002	0,002	0,002
2	0,003	0,002	0,002	0,002	0,003	0,003	0,004	0,004	0,005	0,005
3	0,005	0,003	0,004	0,004	0,005	0,005	0,007	0,007	0,008	0,009
4	0,006	0,004	0,005	0,005	0,006	0,007	0,009	0,009	0,011	0,011
5	0,007	0,005	0,006	0,006	0,008	0,009	0,011	0,011	0,013	0,014
6	0,008	0,006	0,007	0,008	0,009	0,010	0,013	0,014	0,015	0,016
8	0,012	0,008	0,009	0,011	0,013	0,014	0,018	0,019	0,021	0,022
10	0,014	0,010	0,011	0,013	0,016	0,017	0,021	0,023	0,026	0,027
12	0,020	0,014	0,016	0,018	0,021	0,023	0,029	0,031	0,035	0,037
14	0,021	0,015	0,017	0,019	0,023	0,025	0,031	0,033	0,037	0,040
16	0,023	0,016	0,019	0,021	0,026	0,028	0,035	0,037	0,042	0,044
18	0,027	0,019	0,022	0,025	0,030	0,033	0,041	0,044	0,049	0,052
20	0,029	0,020	0,023	0,026	0,032	0,035	0,044	0,047	0,053	0,056
22	0,031	0,022	0,025	0,030	0,038	0,040	0,050	0,050	0,060	0,061
25	0,036	0,025	0,029	0,033	0,040	0,044	0,055	0,058	0,066	0,069

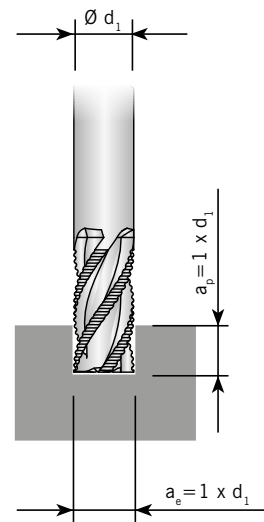

Attention: Feed rate correction factor → $K_f f_z = 1,10$ with $a_p = 1 \times d_1$ and → $K_f f_z = 1,25$ with $a_p = 0,5 \times d_1$. Feed rates are reduced by 10-20% for uncoated tools.



Feed rates for ball nosed- and High feed cutters

≤ 40 HRC

Ball nose end milling cutters		Ball nose end milling cutters		Ball nose cutter for mold and die production		Torus end milling cutters		Torus end milling cutters	
TiAlN-coated		TiAlN-coated		TiAlN-coated		TiAlN-coated		TiAlN-coated	
d_1 [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]
2	0,015	0,010	0,005	0,010	0,015	0,020	0,030	0,040	0,060
3	0,030	0,020	0,015	0,015	0,020	0,030	0,040	0,050	0,060
4	0,040	0,030	0,030	0,020	0,030	0,040	0,050	0,060	0,080
5	0,060	0,050	0,050	0,030	0,040	0,050	0,060	0,080	0,100
6	0,070	0,060	0,060	0,050	0,060	0,080	0,100	0,120	0,150
8	0,100	0,080	0,070	0,080	0,100	0,120	0,150	0,180	0,200
10	0,120	0,100	0,080	0,100	0,120	0,150	0,180	0,200	0,220
12	0,150	0,120	0,090	0,110	0,130	0,160	0,180	0,200	0,220
14	0,160	0,140	0,090	0,120	0,150	0,180	0,200	0,220	0,240
16	0,180	0,150	0,100	0,140	0,160	0,180	0,200	0,220	0,240
18	0,200	0,180	0,110	0,150	0,180	0,200	0,220	0,240	0,240
20	0,220	0,200	0,120	0,160	0,180	0,200	0,220	0,240	0,240
25	0,240	0,220	0,140	0,170	0,200	0,220	0,240	0,240	0,240

Attention: Feed rates are reduced by 10-20% for uncoated tools.

AFG



Feed per tooth fz [mm], hardened materials, dry processing

≤ 40 HRC

AFG

Solid carbide end-mill		Solid carbide end-mill		Solid carbide end-mill		Solid carbide end-mill		Solid carbide end-mill	
Hardness = 40 - 56 HRC Vc = 80 - 120 m/min		Hardness = 40 - 56 HRC Vc = 80 - 120 m/min		Hardness = 40 - 56 HRC Vc = 20 - 50 m/min		Hardness = 52 - 66 HRC Vc = 80 - 120 m/min		Hardness = 52 - 60 HRC Vc = 12 - 20 m/min	
TiAlN-coated		TiAlN-coated		TiAlN-coated		TiAlN-coated		TiAlN-coated	
d ₁ [mm]	fz [mm]	d ₁ [mm]	fz [mm]	d ₁ [mm]	fz [mm]	d ₁ [mm]	fz [mm]	d ₁ [mm]	fz [mm]
2	0,005	2	0,005	2	0,004	2	0,005	2	0,002
3	0,008	3	0,008	3	0,006	3	0,008	3	0,003
4	0,015	4	0,013	4	0,009	4	0,010	4	0,004
5	0,020	5	0,017	5	0,011	5	0,013	5	0,006
6	0,026	6	0,021	6	0,015	6	0,015	6	0,008
8	0,035	8	0,029	8	0,020	8	0,020	8	0,010
10	0,043	10	0,036	10	0,025	10	0,025	10	0,013
12	0,052	12	0,043	12	0,030	12	0,030	12	0,015
14	0,060	14	0,050	14	0,035	14	0,035	14	0,018
16	0,060	16	0,057	16	0,040	16	0,040	16	0,020
18	0,060	18	0,060	18	0,045	18	0,045	18	0,023
20	0,060	20	0,060	20	0,050	20	0,050	20	0,025
22	0,060	22	0,060	22	0,050	22	0,050	22	0,030
25	0,060	25	0,065	25	0,055	25	0,055	25	0,035

Attention: Feed rates are reduced by 10-20% for uncoated tools.



Feed per tooth fz [mm], hardened materials, dry processing

≤ 40 HRC


	Ball nose end milling cutters	Ball nose end milling cutters	Ball nose cutter for mold and die production	Ball nose cutter for mold and die production	Torus end milling cutters	Torus end milling cutters
	Hardness = 40-63 HRC Vc = 80-120 m/min	Hardness = 40-60 HRC Vc = 80-120 m/min	Hardness = 40-56 HRC Vc = 80-120 m/min	Hardness = 40-60 HRC Vc = 80-120 m/min	Hardness = 40-60 HRC Vc = 80-120 m/min	Hardness = 40-60 HRC Vc = 80-120 m/min
	TiAlN-coated	TiAlN-coated	TiAlN-coated	TiAlN-coated	TiAlN-coated	TiAlN-coated
d ₁ [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]
2	0,005	0,005	0,005	0,005	0,005	0,005
3	0,015	0,010	0,015	0,010	0,015	0,010
4	0,030	0,015	0,030	0,015	0,030	0,015
5	0,050	0,020	0,050	0,020	0,050	0,020
6	0,060	0,030	0,060	0,030	0,060	0,030
8	0,070	0,035	0,070	0,035	0,070	0,035
10	0,080	0,040	0,080	0,040	0,080	0,040
12	0,080	0,050	0,080	0,050	0,080	0,050
14	0,090	0,065	0,100	0,065	0,090	0,065
16	0,100	0,080	0,100	0,080	0,100	0,080
18	0,100	0,100	0,110	0,100	0,110	0,100
20	0,120	0,120	0,130	0,120	0,120	0,120
25	0,120	0,120	0,130	0,120	0,120	0,120

Attention: Feed rates are reduced by 10-20% for uncoated tools.

AFG


For more information see

www.arno.de

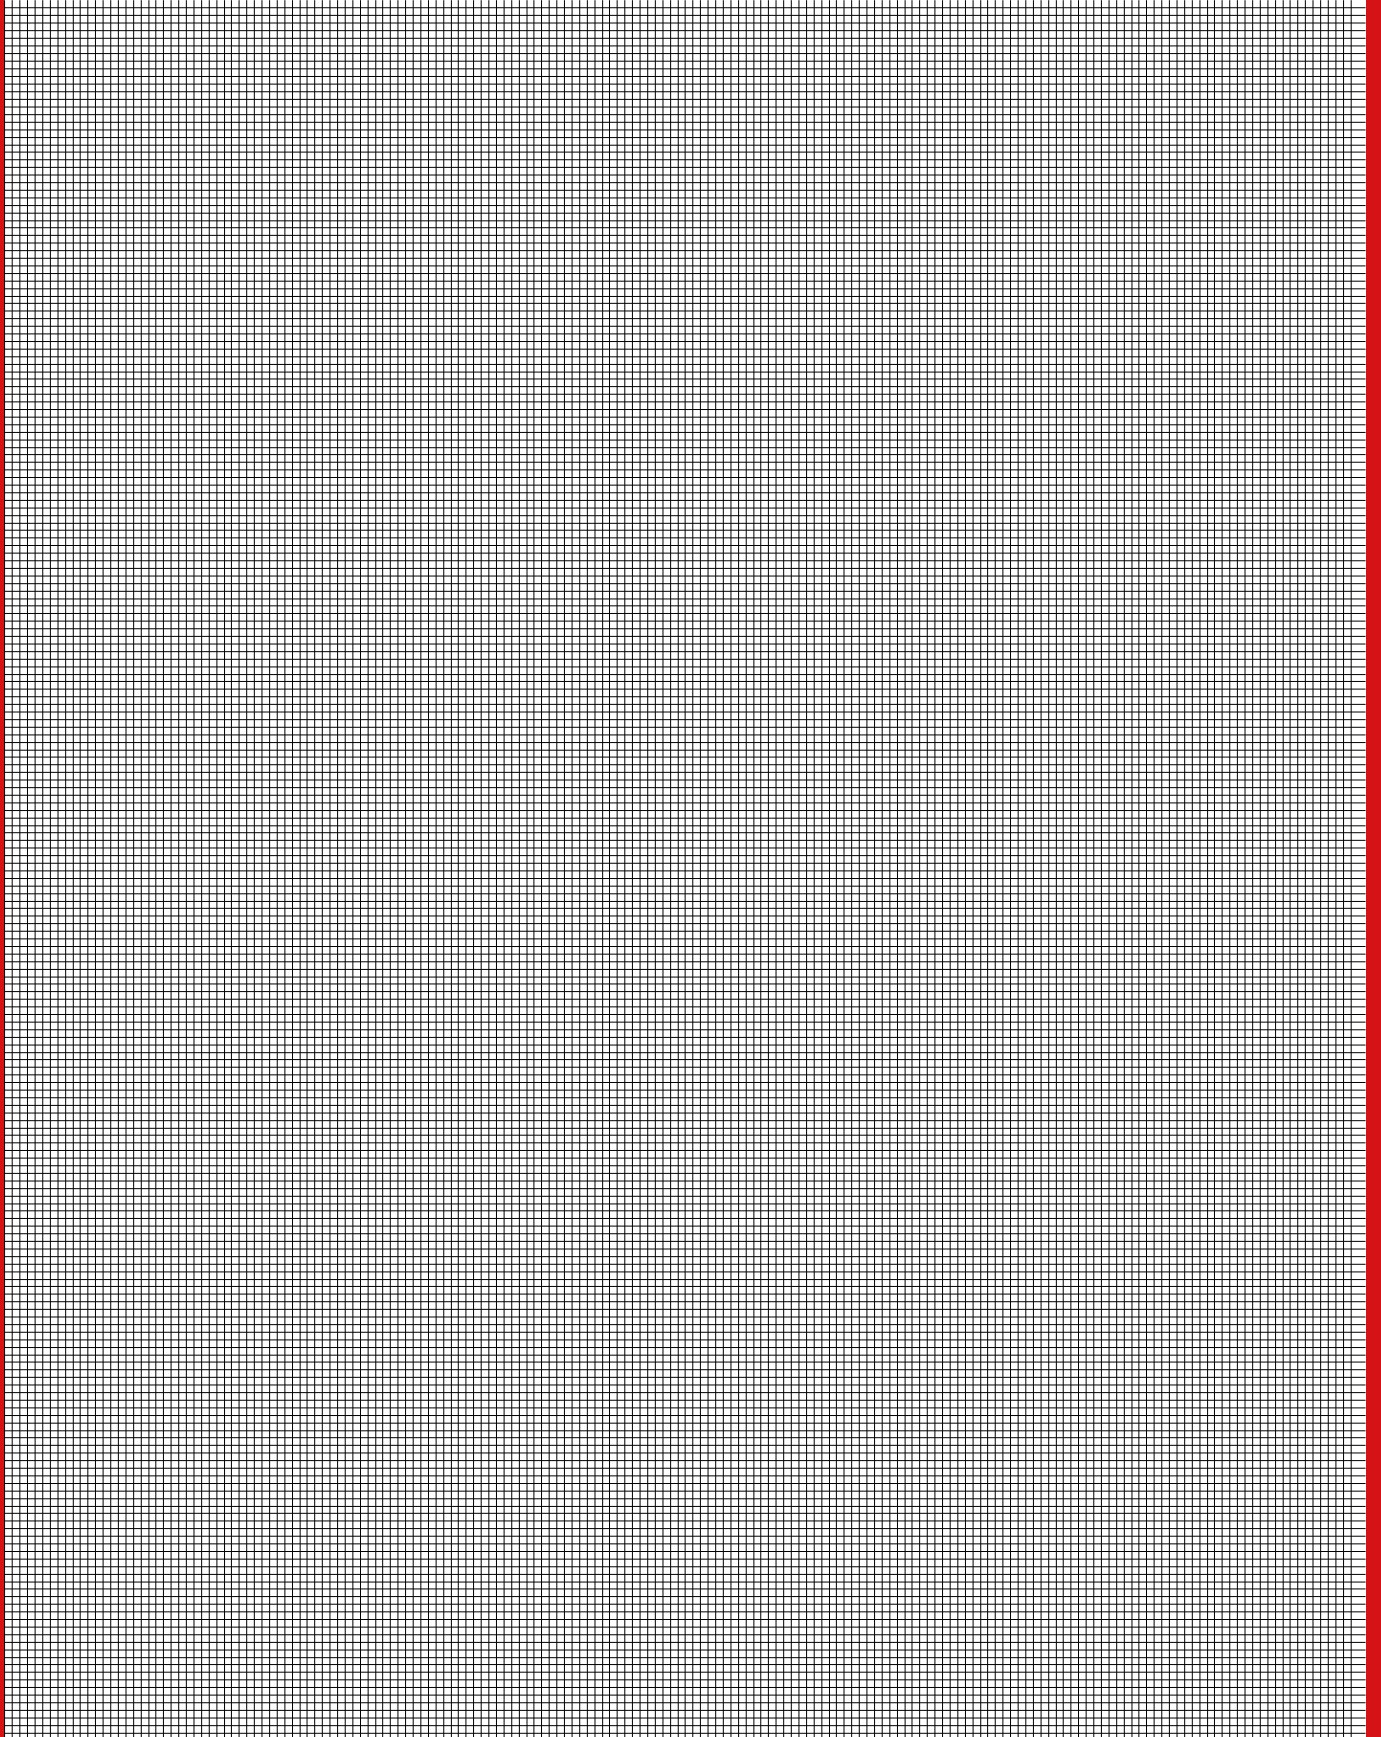

FOR THE REALLY HARD JOBS.



This series is suitable for milling steel
up to 70 HRC as well as high speed milling.
Can be run dry.

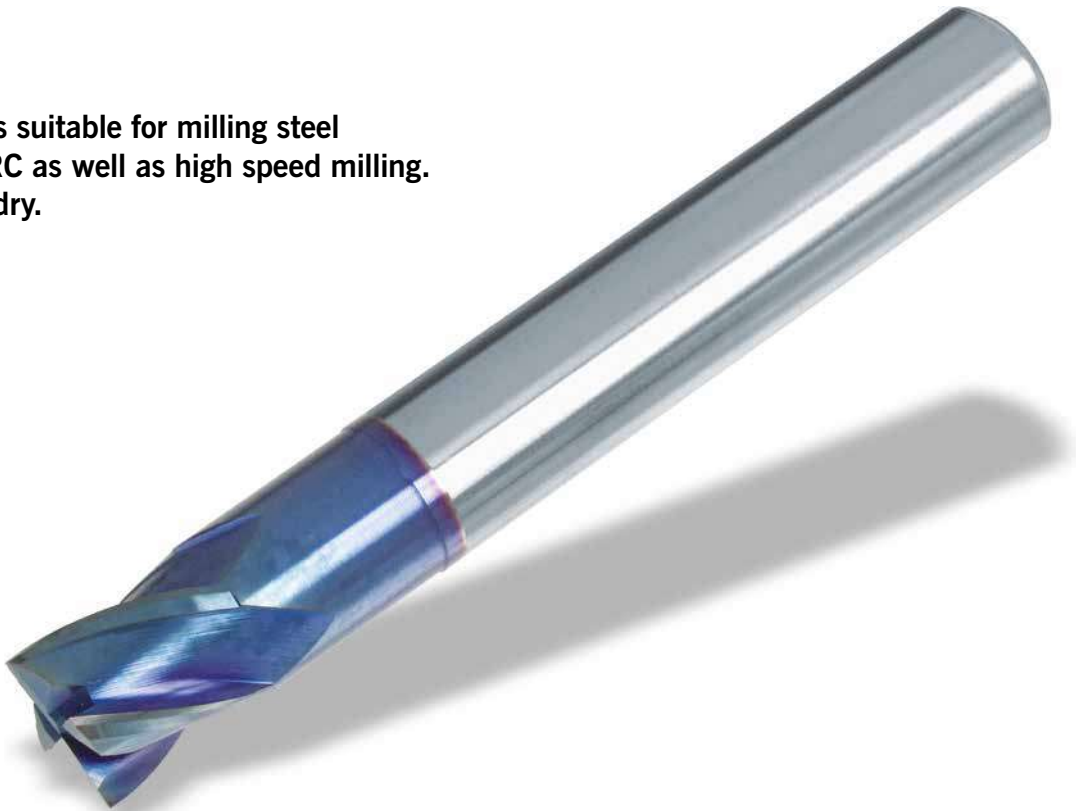



AFH50120-...R...

2 flutes, mini design, with corner radius

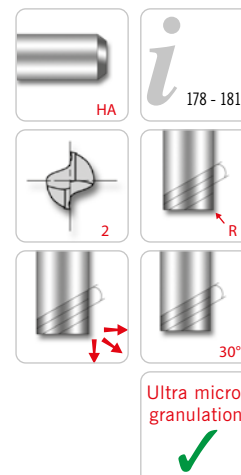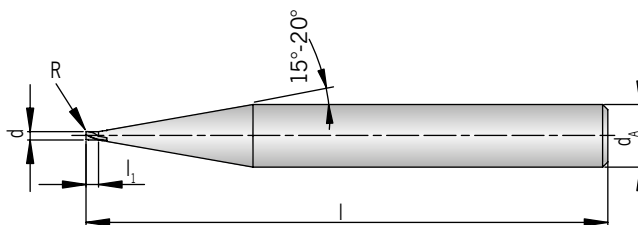

Shank DIN 6535HA	d -0,012	d _A h6	l ₁	l	R ±0,010	PG 24 / Price in £ HC
						TIAl70
AFH50120-003	0.3	6	0.45	50	-	42.29
AFH50120-004	0.4	6	0.60	50	-	42.29
AFH50120-005R0,05	0.5	6	0.70	50	0.05	34.56
AFH50120-006R0,05	0.6	6	0.90	50	0.05	34.56
AFH50120-008R0,05	0.8	6	1.20	50	0.05	34.56
AFH50120-010R0,1	1.0	6	1.50	50	0.10	29.34
AFH50120-012R0,1	1.2	6	1.80	50	0.10	29.34
AFH50120-015R0,15	1.5	6	2.20	50	0.15	29.34
AFH50120-020R0,15	2.0	6	2.20	50	0.15	29.34

HC = Carbide coated



P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application



AFH50526-...

2 flutes, mini design

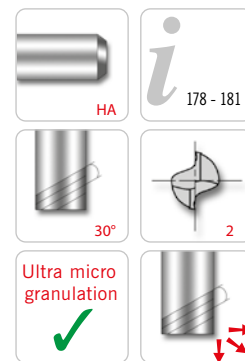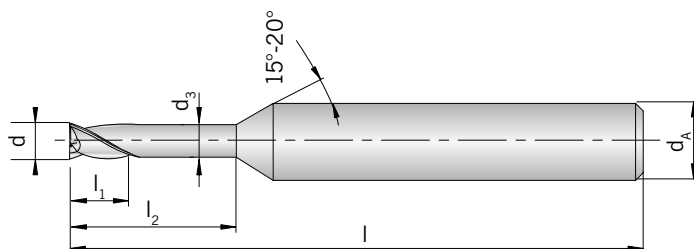

Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	PG 24 / Price in £ HC
							TIA70
AFH50526-001A	0.1	4	0.085	0.15	0.3	45	61.50
AFH50526-001B	0.1	4	0.085	0.15	0.5	45	61.50
AFH50526-002A	0.2	4	0.180	0.30	0.5	45	48.05
AFH50526-002B	0.2	4	0.180	0.30	1.0	45	48.05
AFH50526-002C	0.2	4	0.180	0.30	1.5	45	48.05
AFH50526-003A	0.3	4	0.270	0.45	1.0	45	40.48
AFH50526-003B	0.3	4	0.270	0.45	1.5	45	40.48
AFH50526-003C	0.3	4	0.270	0.45	2.0	45	40.48
AFH50526-003D	0.3	4	0.270	0.45	3.0	45	40.48
AFH50526-003E	0.3	4	0.270	0.45	4.0	45	40.48
AFH50526-004A	0.4	4	0.370	0.60	1.0	45	33.78
AFH50526-004B	0.4	4	0.370	0.60	2.0	45	33.78
AFH50526-004C	0.4	4	0.370	0.60	3.0	45	33.78
AFH50526-004D	0.4	4	0.370	0.60	4.0	45	33.78
AFH50526-004E	0.4	4	0.370	0.60	5.0	45	38.93
AFH50526-005A	0.5	4	0.450	0.70	2.0	45	30.85
AFH50526-005B	0.5	4	0.450	0.70	2.5	45	30.85
AFH50526-005C	0.5	4	0.450	0.70	4.0	45	30.85
AFH50526-005D	0.5	4	0.450	0.70	6.0	45	30.85
AFH50526-005E	0.5	4	0.450	0.70	8.0	45	35.68
AFH50526-006A	0.6	4	0.550	0.90	2.0	45	30.85
AFH50526-006B	0.6	4	0.550	0.90	3.0	45	30.85
AFH50526-006C	0.6	4	0.550	0.90	4.0	45	30.85
AFH50526-006D	0.6	4	0.550	0.90	6.0	45	30.85
AFH50526-006E	0.6	4	0.550	0.90	8.0	45	35.48
AFH50526-006F	0.6	4	0.550	0.90	10.0	45	35.48
AFH50526-008A	0.8	4	0.750	1.20	2.0	45	27.90
AFH50526-008B	0.8	4	0.750	1.20	4.0	45	27.90
AFH50526-008C	0.8	4	0.750	1.20	6.0	45	27.90
AFH50526-008D	0.8	4	0.750	1.20	8.0	45	27.90
AFH50526-008E	0.8	4	0.750	1.20	10.0	45	32.40
AFH50526-008F	0.8	4	0.750	1.20	12.0	45	35.68
AFH50526-010A	1.0	4	0.950	1.50	4.0	45	24.97
AFH50526-010B	1.0	4	0.950	1.50	6.0	45	24.97
AFH50526-010C	1.0	4	0.950	1.50	8.0	45	24.97
AFH50526-010D	1.0	4	0.950	1.50	10.0	45	24.97



Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	PG 24 / Price in £ HC
							TIA70
AFH50526-010E	1.0	4	0.950	1.50	12.0	45	26.51
AFH50526-010F	1.0	4	0.950	1.50	16.0	50	27.99
AFH50526-010G	1.0	4	0.950	1.50	20.0	55	28.93
AFH50526-012A	1.2	4	1.150	1.80	6.0	45	24.97
AFH50526-012B	1.2	4	1.150	1.80	8.0	45	24.97
AFH50526-012C	1.2	4	1.150	1.80	10.0	45	24.97
AFH50526-012D	1.2	4	1.150	1.80	12.0	45	26.51
AFH50526-012E	1.2	4	1.150	1.80	16.0	50	27.99
AFH50526-015A	1.5	4	1.450	2.30	6.0	45	24.97
AFH50526-015B	1.5	4	1.450	2.30	8.0	45	24.97
AFH50526-015C	1.5	4	1.450	2.30	10.0	45	24.97
AFH50526-015D	1.5	4	1.450	2.30	12.0	45	26.51
AFH50526-015E	1.5	4	1.450	2.30	14.0	50	26.51
AFH50526-015F	1.5	4	1.450	2.30	16.0	50	27.99
AFH50526-015G	1.5	4	1.450	2.30	18.0	55	27.99
AFH50526-015H	1.5	4	1.450	2.30	20.0	55	27.99
AFH50526-020A	2.0	4	1.950	3.00	6.0	45	23.78
AFH50526-020B	2.0	4	1.950	3.00	8.0	45	23.78
AFH50526-020C	2.0	4	1.950	3.00	10.0	45	23.78
AFH50526-020D	2.0	4	1.950	3.00	12.0	45	23.78
AFH50526-020E	2.0	4	1.950	3.00	14.0	50	23.78
AFH50526-020F	2.0	4	1.950	3.00	16.0	50	25.83
AFH50526-020G	2.0	4	1.950	3.00	18.0	55	25.83
AFH50526-020H	2.0	4	1.950	3.00	20.0	55	25.83
AFH50526-020J	2.0	4	1.950	3.00	25.0	60	27.38
AFH50526-020K	2.0	4	1.950	3.00	30.0	70	27.38
AFH50526-030A	3.0	6	2.850	4.50	10.0	45	35.83
AFH50526-030B	3.0	6	2.850	4.50	12.0	45	35.83
AFH50526-030C	3.0	6	2.850	4.50	14.0	50	35.83
AFH50526-030D	3.0	6	2.850	4.50	16.0	55	36.70
AFH50526-030E	3.0	6	2.850	4.50	18.0	55	36.70
AFH50526-030F	3.0	6	2.850	4.50	20.0	60	36.70
AFH50526-030G	3.0	6	2.850	4.50	25.0	65	36.70
AFH50526-030H	3.0	6	2.850	4.50	30.0	70	44.18
AFH50526-030J	3.0	6	2.850	4.50	35.0	80	47.71
AFH50526-030K	3.0	6	2.850	4.50	40.0	90	47.71
AFH50526-040A	4.0	6	3.850	6.00	12.0	50	36.70
AFH50526-040B	4.0	6	3.850	6.00	16.0	60	36.70
AFH50526-040C	4.0	6	3.850	6.00	20.0	60	36.70
AFH50526-040D	4.0	6	3.850	6.00	25.0	70	36.70
AFH50526-040E	4.0	6	3.850	6.00	30.0	70	44.18
AFH50526-040F	4.0	6	3.850	6.00	35.0	80	47.71
AFH50526-040G	4.0	6	3.850	6.00	40.0	90	47.71
AFH50526-040H	4.0	6	3.850	6.00	45.0	90	52.54
AFH50526-040J	4.0	6	3.850	6.00	50.0	100	63.04

HC = Carbide coated

P	○
M	
K	
N	
S	
H	●



● Main application
○ Secondary application

AFH



AFH50920-...R...

2 flutes, mini design, with corner radius

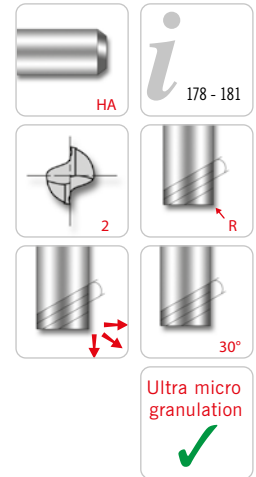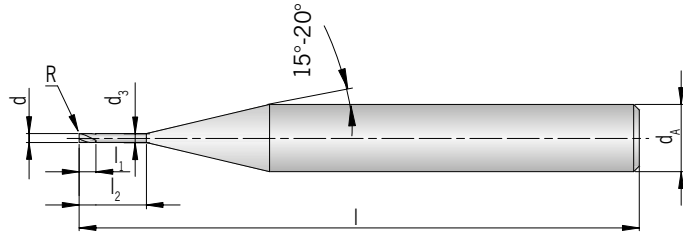



Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,010	PG 24 / Price in £ HC
								TIA70
AFH50920-005AR0,05	0.5	6	0.45	0.7	1.5	50	0.05	31.56
AFH50920-005BR0,05	0.5	6	0.45	0.7	3.3	50	0.05	31.56
AFH50920-006AR0,05	0.6	6	0.55	0.9	2.0	50	0.05	31.56
AFH50920-006BR0,05	0.6	6	0.55	0.9	4.0	50	0.05	31.56
AFH50920-008AR0,05	0.8	6	0.75	1.2	2.5	50	0.05	29.34
AFH50920-008BR0,05	0.8	6	0.75	1.2	5.5	50	0.05	29.34
AFH50920-010AR0,1	1.0	6	0.95	1.5	3.3	50	0.10	26.37
AFH50920-010BR0,1	1.0	6	0.95	1.5	6.7	50	0.10	26.37
AFH50920-012AR0,1	1.2	6	1.15	1.8	4.4	50	0.10	26.37
AFH50920-012BR0,1	1.2	6	1.15	1.8	8.0	50	0.10	26.37
AFH50920-015AR0,15	1.5	6	1.45	2.2	5.0	50	0.15	26.37
AFH50920-015BR0,15	1.5	6	1.45	2.2	9.7	50	0.15	26.37
AFH50920-020AR0,15	2.0	6	1.95	2.2	6.0	50	0.15	26.37
AFH50920-020BR0,15	2.0	6	1.95	2.2	13.0	50	0.15	26.37

HC = Carbide coated

P	○
M	
K	
N	
S	
H	●



AFH50320-...
2 flutes, mini design

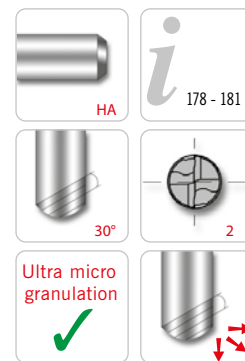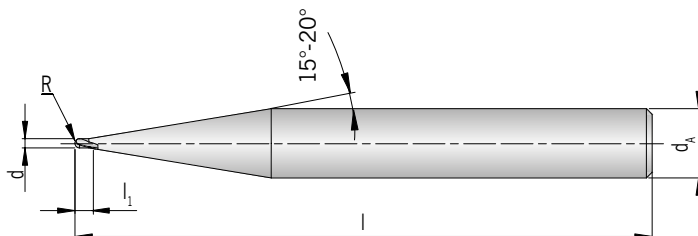

Shank DIN 6535HA	d -0,012	d _A h6	l ₁	l	R ±0,005	PG 24 / Price in £ HC
						TIA70
AFH50320-004	0.4	6	0.4	50	0.20	42.29
AFH50320-005	0.5	6	0.5	50	0.25	42.29
AFH50320-006	0.6	6	0.6	50	0.30	36.29
AFH50320-008	0.8	6	0.8	50	0.40	27.93
AFH50320-010	1.0	6	1.0	50	0.50	27.93
AFH50320-012	1.2	6	1.2	50	0.60	27.93
AFH50320-015	1.5	6	1.5	50	0.75	27.93
AFH50320-020	2.0	6	2.0	50	1.00	27.93



HC = Carbide coated

P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application



AFH52020-...
2 flutes, mini design

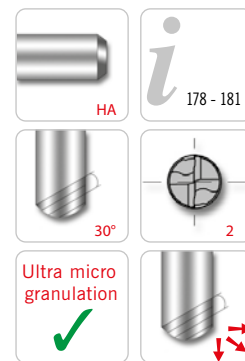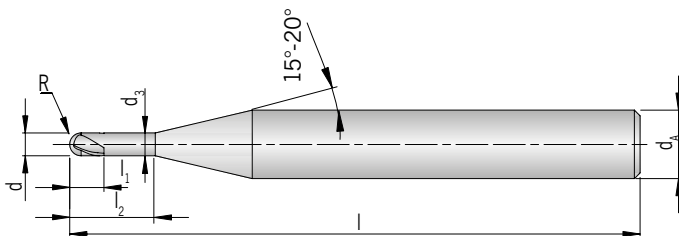

Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,005	PG 24 / Price in £ HC
								TIA70
AFH52020-005A	0.5	6	0.45	0.5	1.5	50	0.25	52.54
AFH52020-005B	0.5	6	0.45	0.5	3.3	50	0.25	52.54
AFH52020-006A	0.6	6	0.55	0.6	2.0	50	0.30	52.54
AFH52020-006B	0.6	6	0.55	0.6	4.0	50	0.30	52.54
AFH52020-008A	0.8	6	0.75	0.8	2.5	50	0.40	40.65
AFH52020-008B	0.8	6	0.75	0.8	5.5	50	0.40	40.65
AFH52020-010A	1.0	6	0.95	1.0	3.3	50	0.50	37.21
AFH52020-010B	1.0	6	0.95	1.0	6.7	50	0.50	37.21
AFH52020-010C	1.0	6	0.95	1.0	12.0	50	0.50	39.80
AFH52020-012A	1.2	6	1.15	1.2	4.4	50	0.60	37.21
AFH52020-012B	1.2	6	1.15	1.2	8.0	50	0.60	39.80
AFH52020-015A	1.5	6	1.45	1.5	5.0	50	0.75	37.21
AFH52020-015B	1.5	6	1.45	1.5	9.7	50	0.75	39.80
AFH52020-015C	1.5	6	1.45	1.5	15.0	50	0.75	39.80
AFH52020-020A	2.0	6	1.95	2.0	6.0	50	1.00	34.80
AFH52020-020B	2.0	6	1.95	2.0	13.0	50	1.00	37.21
AFH52020-020C	2.0	6	1.95	2.0	20.0	60	1.00	39.80

HC = Carbide coated



P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application

AFH



AFH52021-...
2 flutes, mini design

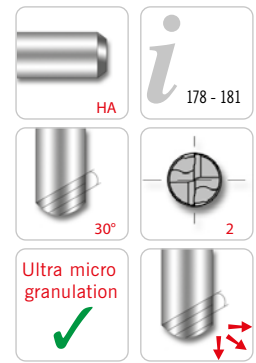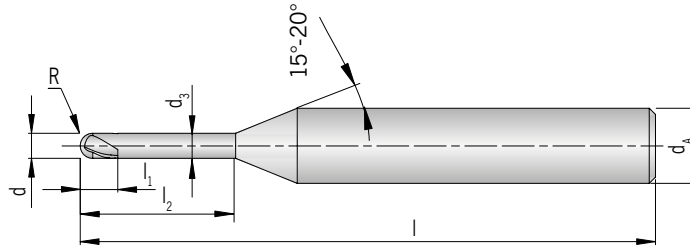

AFH

Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ± 0,005	PG 24 / Price in £ HC
								TIA70
AFH52021-001A	0.1	4	0.085	0.1	0.3	45	0.05	80.61
AFH52021-001B	0.1	4	0.085	0.1	0.5	45	0.05	80.61
AFH52021-002A	0.2	4	0.180	0.2	0.5	45	0.10	62.53
AFH52021-002B	0.2	4	0.180	0.2	1.0	45	0.10	62.53
AFH52021-002C	0.2	4	0.180	0.2	1.5	45	0.10	62.53
AFH52021-003A	0.3	4	0.270	0.3	1.0	45	0.15	52.71
AFH52021-003B	0.3	4	0.270	0.3	2.0	45	0.15	52.71
AFH52021-003C	0.3	4	0.270	0.3	3.0	45	0.15	52.71
AFH52021-004A	0.4	4	0.370	0.4	1.0	45	0.20	39.62
AFH52021-004B	0.4	4	0.370	0.4	2.0	45	0.20	48.05
AFH52021-004C	0.4	4	0.370	0.4	3.0	45	0.20	48.05
AFH52021-004D	0.4	4	0.370	0.4	4.0	45	0.20	48.05
AFH52021-004E	0.4	4	0.370	0.4	5.0	45	0.20	48.05
AFH52021-005A	0.5	4	0.450	0.4	2.0	45	0.25	39.47
AFH52021-005B	0.5	4	0.450	0.4	2.5	45	0.25	39.47
AFH52021-005C	0.5	4	0.450	0.4	4.0	45	0.25	39.47
AFH52021-005D	0.5	4	0.450	0.4	6.0	45	0.25	48.05
AFH52021-005E	0.5	4	0.450	0.4	8.0	45	0.25	48.05
AFH52021-006A	0.6	4	0.550	0.5	2.0	45	0.30	39.47
AFH52021-006B	0.6	4	0.550	0.5	3.0	45	0.30	39.47
AFH52021-006C	0.6	4	0.550	0.5	4.0	45	0.30	39.47
AFH52021-006D	0.6	4	0.550	0.5	5.0	45	0.30	39.47
AFH52021-006E	0.6	4	0.550	0.5	6.0	45	0.30	39.47
AFH52021-006F	0.6	4	0.550	0.5	8.0	45	0.30	48.05
AFH52021-006G	0.6	4	0.550	0.5	10.0	45	0.30	48.05
AFH52021-008A	0.8	4	0.750	0.6	2.0	45	0.40	36.16
AFH52021-008B	0.8	4	0.750	0.6	4.0	45	0.40	36.16
AFH52021-008C	0.8	4	0.750	0.6	6.0	45	0.40	36.16
AFH52021-008D	0.8	4	0.750	0.6	8.0	45	0.40	36.16
AFH52021-008E	0.8	4	0.750	0.6	10.0	45	0.40	47.19
AFH52021-010A	1.0	4	0.950	0.8	3.0	45	0.50	33.24
AFH52021-010B	1.0	4	0.950	0.8	4.0	45	0.50	33.24
AFH52021-010C	1.0	4	0.950	0.8	5.0	45	0.50	33.24
AFH52021-010D	1.0	4	0.950	0.8	6.0	45	0.50	33.24
AFH52021-010E	1.0	4	0.950	0.8	7.0	45	0.50	33.24
AFH52021-010F	1.0	4	0.950	0.8	8.0	45	0.50	33.24



Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ± 0,005	PG 24 / Price in £ HC
								TIA70
AFH52021-010G	1.0	4	0.950	0.8	9.0	45	0.50	33.24
AFH52021-010H	1.0	4	0.950	0.8	10.0	45	0.50	35.48
AFH52021-010J	1.0	4	0.950	0.8	12.0	45	0.50	35.48
AFH52021-010K	1.0	4	0.950	0.8	14.0	50	0.50	37.88
AFH52021-010L	1.0	4	0.950	0.8	16.0	50	0.50	37.88
AFH52021-010M	1.0	4	0.950	0.8	20.0	55	0.50	33.24
AFH52021-012A	1.2	4	1.150	1.0	6.0	45	0.60	33.24
AFH52021-012B	1.2	4	1.150	1.0	8.0	45	0.60	33.24
AFH52021-012C	1.2	4	1.150	1.0	10.0	45	0.60	35.48
AFH52021-012D	1.2	4	1.150	1.0	12.0	45	0.60	35.48
AFH52021-015A	1.5	4	1.450	1.2	6.0	45	0.75	33.24
AFH52021-015B	1.5	4	1.450	1.2	8.0	45	0.75	33.24
AFH52021-015C	1.5	4	1.450	1.2	10.0	45	0.75	33.24
AFH52021-015D	1.5	4	1.450	1.2	12.0	45	0.75	35.48
AFH52021-015E	1.5	4	1.450	1.2	14.0	50	0.75	35.48
AFH52021-015F	1.5	4	1.450	1.2	16.0	50	0.75	37.88
AFH52021-015G	1.5	4	1.450	1.2	20.0	55	0.75	37.88
AFH52021-020A	2.0	4	1.950	1.6	4.0	45	1.00	31.02
AFH52021-020B	2.0	4	1.950	1.6	6.0	45	1.00	31.02
AFH52021-020C	2.0	4	1.950	1.6	8.0	45	1.00	31.02
AFH52021-020D	2.0	4	1.950	1.6	10.0	45	1.00	31.02
AFH52021-020E	2.0	4	1.950	1.6	12.0	50	1.00	31.02
AFH52021-020F	2.0	4	1.950	1.6	14.0	50	1.00	33.24
AFH52021-020G	2.0	4	1.950	1.6	16.0	50	1.00	33.24
AFH52021-020H	2.0	4	1.950	1.6	18.0	55	1.00	35.48
AFH52021-020J	2.0	4	1.950	1.6	20.0	55	1.00	35.48
AFH52021-020K	2.0	4	1.950	1.6	22.0	60	1.00	35.48
AFH52021-020L	2.0	4	1.950	1.6	25.0	60	1.00	35.48
AFH52021-020M	2.0	4	1.950	1.6	30.0	70	1.00	40.99
AFH52021-030A	3.0	6	2.850	2.4	12.0	50	1.50	38.43
AFH52021-030B	3.0	6	2.850	2.4	14.0	55	1.50	46.49
AFH52021-030C	3.0	6	2.850	2.4	16.0	55	1.50	46.49
AFH52021-030D	3.0	6	2.850	2.4	18.0	60	1.50	49.96
AFH52021-030E	3.0	6	2.850	2.4	20.0	60	1.50	49.96
AFH52021-030F	3.0	6	2.850	2.4	25.0	65	1.50	49.96
AFH52021-030G	3.0	6	2.850	2.4	30.0	70	1.50	54.10
AFH52021-030H	3.0	6	2.850	2.4	35.0	80	1.50	59.42
AFH52021-040A	4.0	6	3.850	3.2	12.0	60	2.00	38.43
AFH52021-040B	4.0	6	3.850	3.2	16.0	60	2.00	46.49
AFH52021-040C	4.0	6	3.850	3.2	20.0	65	2.00	49.96
AFH52021-040D	4.0	6	3.850	3.2	25.0	70	2.00	49.96
AFH52021-040E	4.0	6	3.850	3.2	30.0	70	2.00	54.10
AFH52021-040F	4.0	6	3.850	3.2	35.0	80	2.00	59.42
AFH52021-040G	4.0	6	3.850	3.2	40.0	90	2.00	59.42
AFH52021-040H	4.0	6	3.850	3.2	45.0	90	2.00	71.32
AFH52021-040J	4.0	6	3.850	3.2	50.0	100	2.00	71.32

HC = Carbide coated



P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application



AFH50125-...

2 flutes

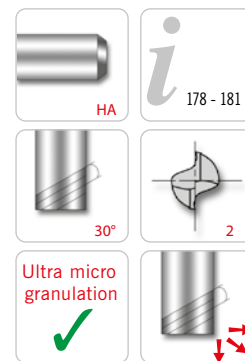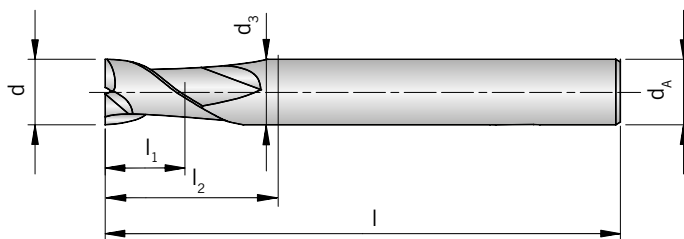

Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	PG 24 / Price in £ HC
							TIA70
AFH50125-001	0.1	4	-	0.2	-	40	51.33
AFH50125-002	0.2	4	-	0.4	-	40	39.96
AFH50125-003	0.3	4	-	0.6	-	40	35.32
AFH50125-004	0.4	4	-	0.8	-	40	31.02
AFH50125-005	0.5	4	-	1.0	-	40	28.42
AFH50125-006	0.6	4	-	1.2	-	40	28.42
AFH50125-007	0.7	4	-	1.4	-	40	28.42
AFH50125-008	0.8	4	-	1.6	-	40	28.42
AFH50125-009	0.9	4	-	2.0	-	40	28.42
AFH50125-010	1.0	6	0.95	1.5	3	50	28.42
AFH50125-015	1.5	6	1.45	1.7	4	50	28.42
AFH50125-020	2.0	6	1.95	2.0	5	50	28.42
AFH50125-025	2.5	6	2.40	2.5	6	55	28.42
AFH50125-030	3.0	6	2.85	3.0	8	55	28.42
AFH50125-035	3.5	6	3.35	3.5	9	55	28.42
AFH50125-040	4.0	6	3.85	4.0	10	55	28.42
AFH50125-050	5.0	6	4.85	5.0	13	55	28.42

HC = Carbide coated

P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application



Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	PG 24 / Price in £ HC
							TIA70
AFH50125-060	6	6	5.85	6	15	55	28.42
AFH50125-080	8	8	7.70	8	20	65	34.80
AFH50125-100	10	10	9.70	10	25	75	51.67
AFH50125-120	12	12	11.70	12	28	85	72.17
AFH50125-160	16	16	15.70	16	32	90	120.74
AFH50125-200	20	20	19.70	20	40	105	198.78

HC = Carbide coated



P	<input type="radio"/>
M	<input type="radio"/>
K	<input type="radio"/>
N	<input type="radio"/>
S	<input type="radio"/>
H	<input checked="" type="radio"/>

- Main application
- Secondary application



AFH50725-...R...

2 flutes, with corner radius

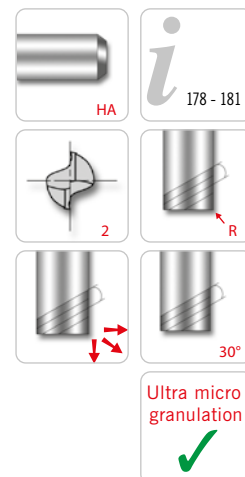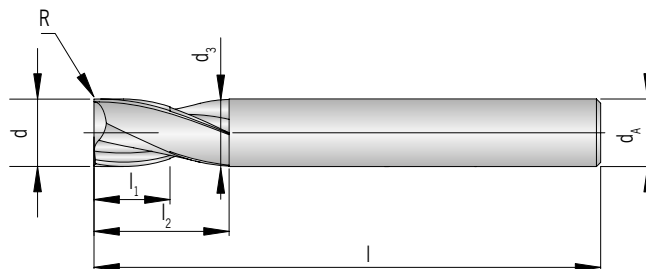

Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,010	PG 24 / Price in £ HC
								TA70
AFH50725-005R0,05	0.5	4	-	1.0	-	40	0.05	30.50
AFH50725-006R0,05	0.6	4	-	1.2	-	40	0.05	30.50
AFH50725-007R0,05	0.7	4	-	1.4	-	40	0.05	26.87
AFH50725-008R0,05	0.8	4	-	1.6	-	40	0.05	24.97
AFH50725-009R0,05	0.9	4	-	2.0	-	40	0.05	24.97
AFH50725-010AR0,1	1.0	4	-	1.5	-	40	0.10	24.97
AFH50725-010BR0,1	1.0	6	-	1.5	-	40	0.10	30.50
AFH50725-015R0,1	1.5	6	-	2.2	-	40	0.10	30.50
AFH50725-020AR0,1	2.0	4	1.95	3.0	6	40	0.10	22.23
AFH50725-020BR0,1	2.0	6	1.95	3.0	6	40	0.10	29.46
AFH50725-025R0,1	2.5	6	2.40	4.0	6	40	0.10	29.46
AFH50725-030R0,1	3.0	6	2.85	4.0	7	45	0.10	29.46
AFH50725-035R0,1	3.5	6	3.35	5.0	9	45	0.10	29.46
AFH50725-040R0,1	4.0	6	3.85	5.0	9	45	0.10	29.46
AFH50725-045R0,1	4.5	6	4.35	6.0	10	45	0.10	29.46
AFH50725-050R0,2	5.0	6	4.85	6.0	11	50	0.20	29.46

HC = Carbide coated

P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application



Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,010	PG 24 / Price in £ HC
								TIA70
AFH50725-060R0,2	6	6	5.85	7	14	50	0.2	29.46
AFH50725-080R0,2	8	8	7.70	9	18	60	0.2	37.30
AFH50725-100R0,2	10	10	9.70	12	25	75	0.2	55.89
AFH50725-120R0,3	12	12	11.70	15	30	75	0.3	77.09
AFH50725-160R0,3	16	16	15.70	18	38	90	0.3	128.58
AFH50725-200R0,3	20	20	19.70	24	45	100	0.3	213.42

HC = Carbide coated



P	<input type="radio"/>
M	<input type="radio"/>
K	<input type="radio"/>
N	<input type="radio"/>
S	<input type="radio"/>
H	<input checked="" type="radio"/>

- Main application
- Secondary application



AFH50926-...R...

2 flutes, with corner radius

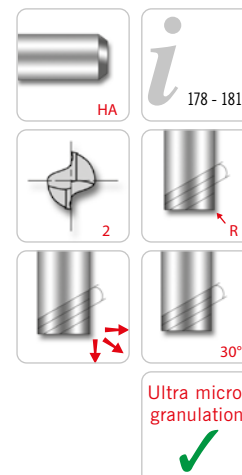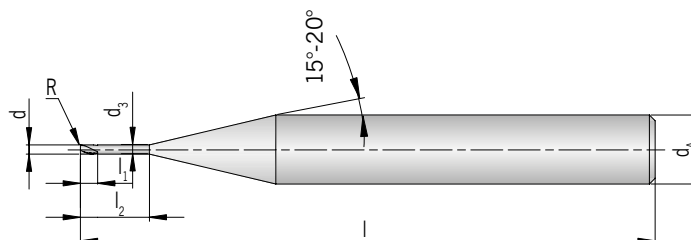

Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,010	PG 24 / Price in £ HC
								TiAl70
AFH50926-005AR0,05	0.5	4	0.45	0.7	1.5	45	0.05	30.85
AFH50926-005BR0,05	0.5	4	0.45	0.7	2.5	45	0.05	30.85
AFH50926-005CR0,05	0.5	4	0.45	0.7	4.0	45	0.05	30.85
AFH50926-006AR0,05	0.6	4	0.55	0.9	2.0	45	0.05	30.85
AFH50926-006BR0,05	0.6	4	0.55	0.9	3.0	45	0.05	30.85
AFH50926-006CR0,05	0.6	4	0.55	0.9	4.0	45	0.05	30.85
AFH50926-006DR0,1	0.6	4	0.55	0.9	2.0	45	0.10	30.85
AFH50926-007R0,1	0.7	4	0.65	1.0	4.0	45	0.10	30.85
AFH50926-008AR0,1	0.8	4	0.75	1.2	2.0	45	0.10	30.85
AFH50926-008BR0,1	0.8	4	0.75	1.2	4.0	45	0.10	30.85
AFH50926-008CR0,1	0.8	4	0.75	1.2	6.0	45	0.10	30.85
AFH50926-010AR0,1	1.0	6	0.95	1.5	4.0	50	0.10	30.85
AFH50926-010BR0,1	1.0	6	0.95	1.5	6.0	50	0.10	30.85
AFH50926-010CR0,2	1.0	6	0.95	1.5	4.0	50	0.20	30.85
AFH50926-010DR0,2	1.0	6	0.95	1.5	6.0	50	0.20	30.85
AFH50926-010ER0,2	1.0	6	0.95	1.5	8.0	50	0.20	30.85
AFH50926-010FR0,3	1.0	6	0.95	1.5	4.0	50	0.30	30.85
AFH50926-010GR0,3	1.0	6	0.95	1.5	6.0	50	0.30	30.85
AFH50926-010HR0,3	1.0	6	0.95	1.5	8.0	50	0.30	30.85
AFH50926-015AR0,2	1.5	6	1.45	2.5	4.0	50	0.20	30.85
AFH50926-015BR0,2	1.5	6	1.45	2.5	6.0	50	0.20	30.85
AFH50926-015CR0,2	1.5	6	1.45	2.5	8.0	50	0.20	30.85
AFH50926-015DR0,2	1.5	6	1.45	2.5	10.0	50	0.20	30.85
AFH50926-015ER0,2	1.5	6	1.45	2.5	12.0	50	0.20	30.85
AFH50926-015FR0,3	1.5	6	1.45	2.5	4.0	50	0.30	30.85
AFH50926-015GR0,3	1.5	6	1.45	2.5	6.0	50	0.30	30.85
AFH50926-015HR0,3	1.5	6	1.45	2.5	8.0	50	0.30	30.85
AFH50926-020AR0,2	2.0	6	1.95	3.0	6.0	50	0.20	30.85
AFH50926-020BR0,2	2.0	6	1.95	3.0	8.0	50	0.20	30.85
AFH50926-020CR0,2	2.0	6	1.95	3.0	10.0	55	0.20	30.85
AFH50926-020DR0,2	2.0	6	1.95	3.0	12.0	55	0.20	30.85
AFH50926-020ER0,3	2.0	6	1.95	3.0	6.0	50	0.30	30.85
AFH50926-020FR0,3	2.0	6	1.95	3.0	8.0	50	0.30	30.85
AFH50926-020GR0,3	2.0	6	1.95	3.0	10.0	55	0.30	30.85
AFH50926-020HR0,3	2.0	6	1.95	3.0	12.0	55	0.30	30.85
AFH50926-020JR0,3	2.0	6	1.95	3.0	16.0	55	0.30	30.85



Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,010	PG 24 / Price in £ HC
								TIA70
AFH50926-020KR0,5	2.0	6	1.95	3.0	6.0	50	0.50	30.85
AFH50926-020LR0,5	2.0	6	1.95	3.0	10.0	55	0.50	30.85
AFH50926-020MR0,5	2.0	6	1.95	3.0	12.0	55	0.50	30.85
AFH50926-030AR0,2	3.0	6	2.85	4.0	8.0	55	0.20	30.85
AFH50926-030BR0,2	3.0	6	2.85	4.0	10.0	55	0.20	30.85
AFH50926-030CR0,2	3.0	6	2.85	4.0	12.0	55	0.20	30.85
AFH50926-030DR0,2	3.0	6	2.85	4.0	16.0	55	0.20	30.85
AFH50926-030ER0,3	3.0	6	2.85	4.0	8.0	55	0.30	30.85
AFH50926-030FR0,3	3.0	6	2.85	4.0	10.0	55	0.30	30.85
AFH50926-030GR0,3	3.0	6	2.85	4.0	12.0	55	0.30	30.85
AFH50926-030HR0,3	3.0	6	2.85	4.0	16.0	55	0.30	30.85
AFH50926-030JR0,5	3.0	6	2.85	4.0	10.0	55	0.50	30.85
AFH50926-030KR0,5	3.0	6	2.85	4.0	12.0	55	0.50	30.85
AFH50926-030LR0,5	3.0	6	2.85	4.0	16.0	55	0.50	30.85
AFH50926-030MR0,5	3.0	6	2.85	4.0	20.0	55	0.50	30.85
AFH50926-040AR0,2	4.0	6	3.85	5.0	12.0	55	0.20	30.85
AFH50926-040BR0,2	4.0	6	3.85	5.0	16.0	55	0.20	30.85
AFH50926-040CR0,2	4.0	6	3.85	5.0	20.0	55	0.20	30.85
AFH50926-040DR0,3	4.0	6	3.85	5.0	10.0	55	0.30	30.85
AFH50926-040ER0,3	4.0	6	3.85	5.0	12.0	55	0.30	30.85
AFH50926-040FR0,3	4.0	6	3.85	5.0	16.0	55	0.30	30.85
AFH50926-040GR0,3	4.0	6	3.85	5.0	20.0	55	0.30	30.85
AFH50926-040HR0,5	4.0	6	3.85	5.0	12.0	55	0.50	30.85
AFH50926-040JR0,5	4.0	6	3.85	5.0	16.0	55	0.50	30.85
AFH50926-040KR0,5	4.0	6	3.85	5.0	20.0	55	0.50	30.85
AFH50926-040LR1,0	4.0	6	3.85	5.0	12.0	55	1.00	30.85
AFH50926-040MR1,0	4.0	6	3.85	5.0	16.0	55	1.00	30.85

HC = Carbide coated

P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application

AFH



Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,010	PG 24 / Price in £ HC
								TIA70
AFH50926-060AR0,3	6	6	5.85	7	20	60	0.3	30.85
AFH50926-060BR0,5	6	6	5.85	7	20	60	0.5	30.85
AFH50926-060CR1,0	6	6	5.85	7	20	60	1.0	30.85
AFH50926-060DR1,5	6	6	5.85	7	20	60	1.5	30.85
AFH50926-060ER2,0	6	6	5.85	7	20	60	2.0	30.85
AFH50926-080AR0,3	8	8	7.70	9	25	60	0.3	36.70
AFH50926-080BR0,5	8	8	7.70	9	25	60	0.5	36.70
AFH50926-080CR1,0	8	8	7.70	9	25	60	1.0	36.70
AFH50926-080DR1,5	8	8	7.70	9	25	60	1.5	36.70
AFH50926-080ER2,0	8	8	7.70	9	25	60	2.0	36.70
AFH50926-100AR0,3	10	10	9.70	11	32	70	0.3	55.11
AFH50926-100BR0,5	10	10	9.70	11	32	70	0.5	55.11
AFH50926-100CR1,0	10	10	9.70	11	32	70	1.0	55.11
AFH50926-100DR1,5	10	10	9.70	11	32	70	1.5	55.11
AFH50926-100ER2,0	10	10	9.70	11	32	70	2.0	55.11
AFH50926-120AR0,5	12	12	11.70	12	38	80	0.5	70.79
AFH50926-120BR1,0	12	12	11.70	12	38	80	1.0	70.79
AFH50926-120CR1,5	12	12	11.70	12	38	80	1.5	70.79
AFH50926-120DR2,0	12	12	11.70	12	38	80	2.0	70.79

HC = Carbide coated



P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application



AFH51625-...

2 flutes

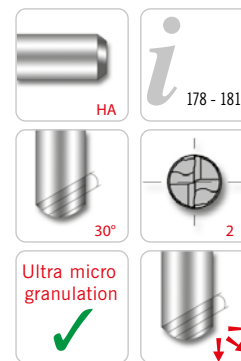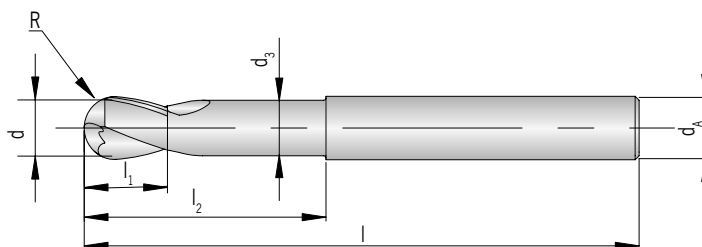

Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,005	PG 24 / Price in £ HC
								TIA70
AFH51625-010	1.0	4	0.95	1.0	2.2	50	0.50	36.16
AFH51625-012	1.2	4	1.15	1.2	2.6	50	0.60	36.16
AFH51625-015	1.5	4	1.45	1.5	3.0	50	0.75	36.16
AFH51625-020	2.0	6	1.95	2.0	4.0	50	1.00	34.30
AFH51625-030	3.0	6	2.85	3.0	6.0	60	1.50	34.30
AFH51625-040	4.0	6	3.85	4.0	8.0	70	2.00	35.83
AFH51625-050	5.0	6	4.85	5.0	10.0	80	2.50	37.04

HC = Carbide coated

P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application



Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,005	PG 24 / Price in £ HC
								TIA70
AFH51625-060	6	6	5.85	6	12	90	3.0	39.62
AFH51625-070	7	8	6.70	7	14	90	3.5	62.71
AFH51625-080	8	8	7.70	8	16	100	4.0	62.71
AFH51625-090	9	10	8.70	9	18	100	4.5	102.31
AFH51625-100	10	10	9.70	10	20	100	5.0	102.31
AFH51625-120	12	12	11.70	12	24	110	6.0	131.43
AFH51625-140	14	14	13.70	14	28	110	7.0	166.25
AFH51625-160	16	16	15.70	16	32	140	8.0	218.74
AFH51625-180	18	18	17.70	18	36	140	9.0	237.72
AFH51625-200	20	20	19.70	20	40	160	10.0	335.88
AFH51625-250	25	25	24.70	25	50	180	12.5	544.31

HC = Carbide coated


P	<input type="radio"/>
M	<input type="radio"/>
K	<input type="radio"/>
N	<input type="radio"/>
S	<input type="radio"/>
H	<input checked="" type="radio"/>

● Main application
○ Secondary application



AFH51626-...

2 flutes

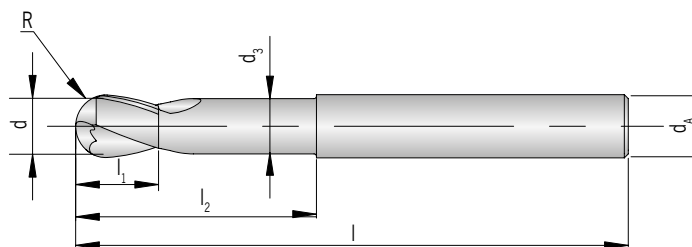

Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,005	PG 24 / Price in £ HC
								TIA70
AFH51626-001	0.1	4	-	0.2	-	40	0.05	71.65
AFH51626-002	0.2	4	-	0.3	-	40	0.10	55.81
AFH51626-003	0.3	4	-	0.5	-	40	0.15	46.86
AFH51626-004	0.4	4	-	0.6	-	40	0.20	39.47
AFH51626-005	0.5	4	-	0.7	-	40	0.25	36.70
AFH51626-006	0.6	4	-	0.9	-	40	0.30	36.70
AFH51626-007	0.7	4	-	1.1	-	40	0.35	34.80
AFH51626-008	0.8	4	-	1.2	-	40	0.40	32.40
AFH51626-009	0.9	4	-	1.4	-	40	0.45	32.40
AFH51626-010	1.0	6	0.95	1.5	3	50	0.50	37.21
AFH51626-015	1.5	6	1.45	2.0	4	50	0.75	34.30
AFH51626-020	2.0	6	1.95	2.5	5	50	1.00	34.30
AFH51626-025	2.5	6	2.40	3.0	7	50	1.25	34.30
AFH51626-030	3.0	6	2.85	4.0	10	60	1.50	34.30
AFH51626-035	3.5	6	3.35	4.5	10	60	1.75	34.30
AFH51626-040	4.0	6	3.85	5.0	10	60	2.00	34.30
AFH51626-045	4.5	6	4.35	5.5	10	60	2.25	36.70
AFH51626-050	5.0	6	4.85	6.0	12	60	2.50	36.70
AFH51626-055	5.5	6	5.35	6.5	12	60	2.75	36.70

HC = Carbide coated

P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application



Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,005	PG 24 / Price in £ HC
								TIA70
AFH51626-060A	6	6	5.85	7	15	60	3	36.70
AFH51626-060B	6	6	5.85	9	30	90	3	59.42
AFH51626-080A	8	8	7.70	9	15	60	4	62.00
AFH51626-080B	8	8	7.70	9	15	80	4	62.00
AFH51626-080C	8	8	7.70	12	30	100	4	71.49
AFH51626-100A	10	10	9.70	11	25	60	5	102.31
AFH51626-100B	10	10	9.70	11	25	80	5	102.31
AFH51626-100C	10	10	9.70	15	30	100	5	116.61
AFH51626-120	12	12	11.70	14	25	80	6	125.58

HC = Carbide coated


P	<input type="radio"/>
M	<input type="radio"/>
K	<input type="radio"/>
N	<input type="radio"/>
S	<input type="radio"/>
H	<input checked="" type="radio"/>

- Main application
- Secondary application



AFH51635-...

3 flutes

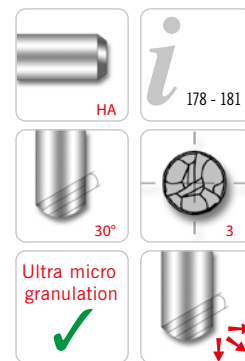

Shank DIN 6535HA	d -0,012	d _A h6	l ₁	l	R ±0,005	PG 24 / Price in £ HC
						TiAl70
AFH51635-030	3	6	8	60	1.5	37.97
AFH51635-040	4	6	8	70	2.0	39.63
AFH51635-050	5	6	10	80	2.5	41.80

HC = Carbide coated

P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application

Shank DIN 6535HA	d -0,012	d _A h6	l ₁	l	R ±0,005	PG 24 / Price in £ HC
						TiAl70
AFH51635-060	6	6	12	90	3	43.67
AFH51635-080	8	8	14	100	4	68.25
AFH51635-100	10	10	18	100	5	113.74
AFH51635-120	12	12	22	110	6	146.34
AFH51635-160	16	16	30	140	8	244.18
AFH51635-200	20	20	38	160	10	374.62

HC = Carbide coated



P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application



AFH50140-...

4 flutes

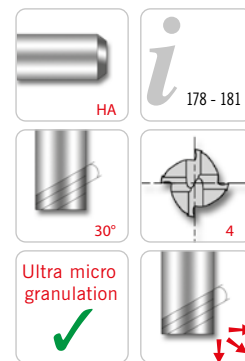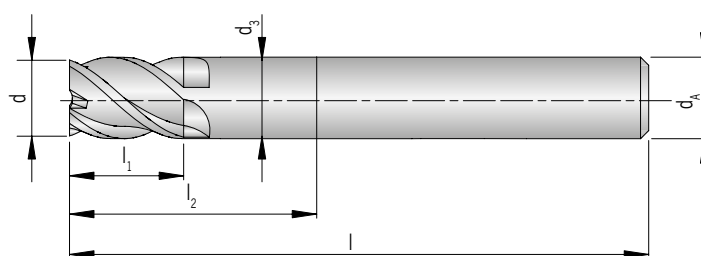

Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	PG 24 / Price in £ HC
							TIA70
AFH50140-010	1	6	0.95	1.5	3	50	28.42
AFH50140-020	2	6	1.95	2.0	5	50	28.42
AFH50140-030	3	6	2.85	3.0	8	55	28.42
AFH50140-040	4	6	3.85	4.0	10	55	28.42
AFH50140-050	5	6	4.85	5.0	13	55	28.42

HC = Carbide coated

P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application

Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	PG 24 / Price in £ HC
							TIA70
AFH50140-060	6	6	5.85	6	15	55	28.42
AFH50140-080	8	8	7.70	8	20	65	34.80
AFH50140-100	10	10	9.70	10	25	75	51.86
AFH50140-120	12	12	11.70	12	28	85	72.17
AFH50140-160	16	16	15.70	16	32	90	116.29
AFH50140-200	20	20	19.70	20	40	105	198.08

HC = Carbide coated



P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application



AFH50142-...R...

4 flutes, with corner radius

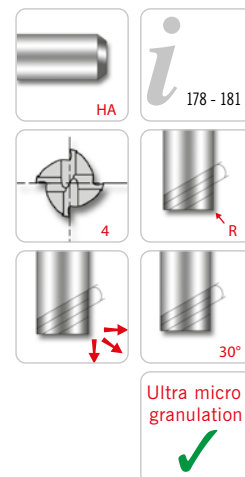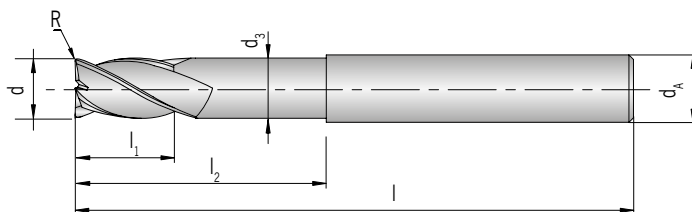

Shank DIN 6535HA	d -0,015	d _A h6	d ₃	l ₁	l ₂	l	R ±0,015	PG 24 / Price in £ HC
								TiAl70
AFH50142-060R0,5	6	6	5.85	9	20	90	0.5	34.10
AFH50142-060R1,0	6	6	5.85	9	20	90	1.0	34.10
AFH50142-080R0,5	8	8	7.70	12	25	100	0.5	44.27
AFH50142-080R1,0	8	8	7.70	12	25	100	1.0	44.27
AFH50142-100R0,5	10	10	9.70	15	32	100	0.5	59.25
AFH50142-100R1,0	10	10	9.70	15	32	100	1.0	59.25
AFH50142-100R2,0	10	10	9.70	15	32	100	2.0	59.25
AFH50142-120R0,5	12	12	11.70	18	38	110	0.5	96.98
AFH50142-120R1,0	12	12	11.70	18	38	110	1.0	96.98
AFH50142-120R2,0	12	12	11.70	18	38	110	2.0	96.98

HC = Carbide coated

P	○
M	
K	
N	
S	
H	●



● Main application
○ Secondary application

AFH



AFH50146-...R...

4 flutes, with corner radius

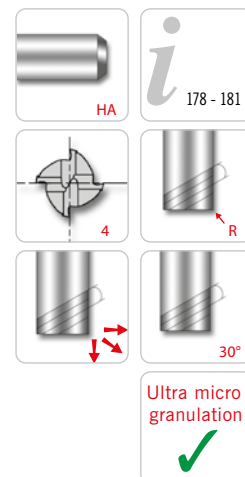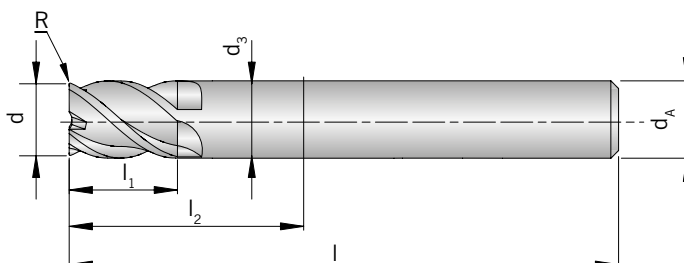

AFH

Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,010	PG 24 / Price in £ HC
								TiAl70
AFH50146-030AR0,3	3	6	2.85	4	12	55	0.3	29.46
AFH50146-030BR0,3	3	6	2.85	4	16	55	0.3	29.46
AFH50146-030CR0,3	3	6	2.85	4	20	55	0.3	29.46
AFH50146-030DR0,5	3	6	2.85	4	10	55	0.5	29.46
AFH50146-030ER0,5	3	6	2.85	4	16	55	0.5	29.46
AFH50146-030FR0,5	3	6	2.85	4	20	55	0.5	29.46
AFH50146-040AR0,3	4	6	3.85	5	12	55	0.3	29.46
AFH50146-040BR0,3	4	6	3.85	5	16	55	0.3	29.46
AFH50146-040CR0,3	4	6	3.85	5	20	55	0.3	29.46
AFH50146-040DR0,5	4	6	3.85	5	12	55	0.5	29.46
AFH50146-040ER0,5	4	6	3.85	5	16	55	0.5	29.46
AFH50146-040FR0,5	4	6	3.85	5	20	55	0.5	29.46
AFH50146-040GR1,0	4	6	3.85	5	12	55	1.0	29.46

HC = Carbide coated

P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application



Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,010	PG 24 / Price in £ HC
								TIA70
AFH50146-060AR0,5	6	6	5.85	7	20	60	0.5	29.46
AFH50146-060BR1,0	6	6	5.85	7	20	60	1.0	29.46
AFH50146-060CR1,5	6	6	5.85	7	20	60	1.5	29.46
AFH50146-080AR0,5	8	8	7.70	9	25	60	0.5	37.30
AFH50146-080BR1,0	8	8	7.70	9	25	60	1.0	37.30
AFH50146-080CR1,5	8	8	7.70	9	25	60	1.5	37.30
AFH50146-080DR2,0	8	8	7.70	9	25	60	2.0	37.30
AFH50146-100AR0,5	10	10	9.70	11	32	70	0.5	55.89
AFH50146-100BR1,0	10	10	9.70	11	32	70	1.0	55.89
AFH50146-100CR1,5	10	10	9.70	11	32	70	1.5	55.89
AFH50146-100DR2,0	10	10	9.70	11	32	70	2.0	55.89
AFH50146-120AR0,5	12	12	11.70	12	38	80	0.5	77.09
AFH50146-120BR1,0	12	12	11.70	12	38	80	1.0	77.09
AFH50146-120CR1,5	12	12	11.70	12	38	80	1.5	77.09
AFH50146-120DR2,0	12	12	11.70	12	38	80	2.0	77.09

HC = Carbide coated



P	<input type="radio"/>
M	<input type="radio"/>
K	<input type="radio"/>
N	<input type="radio"/>
S	<input type="radio"/>
H	<input checked="" type="radio"/>

● Main application
○ Secondary application



AFH50745-...R...

4 flutes, with corner radius

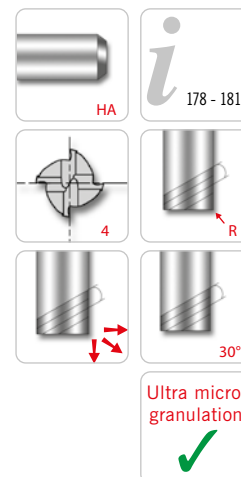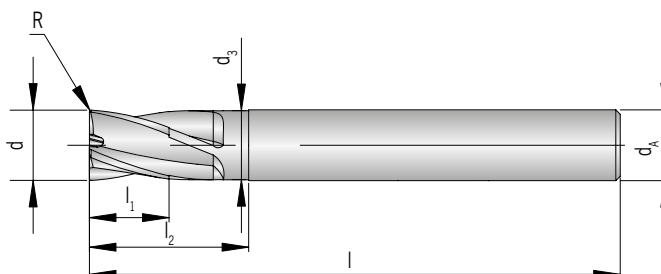

AFH

Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,010	PG 24 / Price in £ HC
								TA70
AFH50745-010R0,1	1.0	6	-	1.5	-	40	0.1	20.57
AFH50745-015R0,1	1.5	6	-	2.2	-	40	0.1	20.57
AFH50745-020R0,1	2.0	6	1.95	3.0	6	40	0.1	20.57
AFH50745-025R0,1	2.5	6	2.40	4.0	6	40	0.1	20.57
AFH50745-030R0,1	3.0	6	2.85	4.0	7	45	0.1	27.27
AFH50745-035R0,1	3.5	6	3.35	5.0	9	45	0.1	27.27
AFH50745-040R0,1	4.0	6	3.85	5.0	9	45	0.1	27.27
AFH50745-045R0,1	4.5	6	4.35	6.0	10	45	0.1	27.27
AFH50745-050R0,2	5.0	6	4.85	6.0	11	50	0.2	27.27

HC = Carbide coated

P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application



Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,010	PG 24 / Price in £ HC
								TIA70
AFH50745-060R0,2	27.27	6	5.85	7	14	50	0.2	27.27
AFH50745-080R0,2	34.45	8	7.70	9	18	60	0.2	34.45
AFH50745-100R0,2	51.67	10	9.70	12	25	75	0.2	51.67
AFH50745-120R0,3	71.26	12	11.70	15	30	75	0.3	71.26
AFH50745-160R0,3	118.91	16	15.70	18	38	90	0.3	118.91
AFH50745-200R0,3	197.35	20	19.70	24	45	100	0.3	197.35

HC = Carbide coated



P	<input type="radio"/>
M	<input type="radio"/>
K	<input type="radio"/>
N	<input type="radio"/>
S	<input type="radio"/>
H	<input checked="" type="radio"/>

- Main application
- Secondary application



AFH50341-...

4 flutes

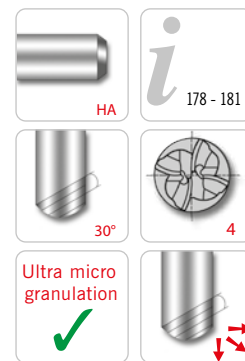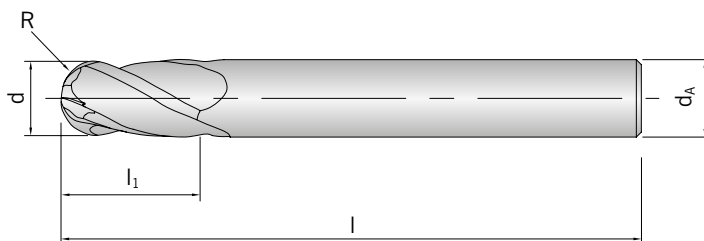

Shank DIN 6535HA	d -0,012	d _A h6	l ₁	l	R ±0,005	PG 24 / Price in £ HC
						TIA70
AFH50341-030	3	6	8	60	1.5	39.29
AFH50341-040	4	6	8	70	2.0	41.00
AFH50341-050	5	6	10	80	2.5	43.29

HC = Carbide coated

P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application

Shank DIN 6535HA	d -0,012	d _A h6	l ₁	l	R ±0,005	PG 24 / Price in £ HC
						TIA70
AFH50341-060	6	6	12	90	3	45.14
AFH50341-080	8	8	14	100	4	70.64
AFH50341-100	10	10	18	100	5	117.63
AFH50341-120	12	12	22	110	6	151.67
AFH50341-160	16	16	30	140	8	252.05
AFH50341-200	20	20	38	160	10	387.34

HC = Carbide coated



P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application



AFH50865-...R...

6 flutes, with corner radius

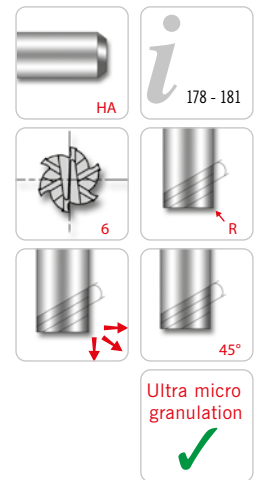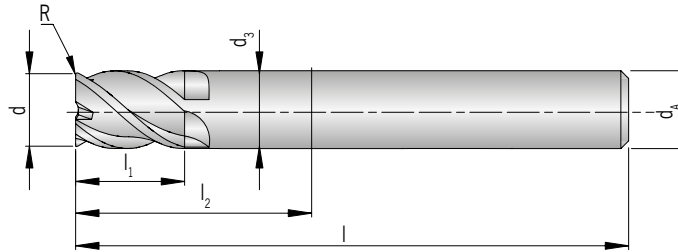

Shank DIN 6535HA	d -0,015	d _A h6	d ₃	l ₁	l ₂	l	R ±0,015	PG 24 / Price in £ HC
								TIA70
AFH50865-060AR0,25	6	6	5.85	6	14	50	0.25	42.09
AFH50865-060BR0,5	6	6	5.85	6	14	50	0.50	42.09
AFH50865-060CR0,5	6	6	-	13	-	70	0.50	47.96
AFH50865-060DR0,5 ¹⁾	6	6	-	26	-	70	0.50	57.03
AFH50865-080AR0,5	8	8	7.70	8	24	60	0.50	50.47
AFH50865-080BR0,5	8	8	-	19	-	90	0.50	60.19
AFH50865-080CR0,5 ¹⁾	8	8	-	36	-	90	0.50	73.72
AFH50865-100AR0,5	10	10	-	22	-	100	0.50	90.79
AFH50865-100BR1,0	10	10	9.70	10	30	70	1.00	78.72
AFH50865-100CR1,0	10	10	-	22	-	100	1.00	90.79
AFH50865-100DR1,0 ¹⁾	10	10	-	46	-	100	1.00	116.42
AFH50865-120AR0,5	12	12	-	26	-	110	0.50	123.92
AFH50865-120BR1,0	12	12	11.70	12	30	75	1.00	94.06
AFH50865-120CR1,0	12	12	-	26	-	110	1.00	123.92
AFH50865-120DR1,0 ¹⁾	12	12	-	56	-	110	1.00	165.72
AFH50865-160AR1,0	16	16	-	32	-	130	1.00	209.79
AFH50865-160BR1,5	16	16	-	32	-	130	1.50	227.89
AFH50865-160CR1,5 ¹⁾	16	16	-	66	-	130	1.50	289.39
AFH50865-200AR1,0	20	20	-	38	-	140	1.00	305.65
AFH50865-200BR1,5	20	20	-	38	-	140	1.50	334.61
AFH50865-200CR2,0 ¹⁾	20	20	-	38	-	140	2.00	334.61
AFH50865-200DR2,0	20	20	-	76	-	140	2.00	451.28

HC = Carbide coated
1) Tolerance for d of -0.03

P	○
M	
K	
N	
S	
H	●


● Main application
○ Secondary application

AFH



AFH508.1-...

6 - 8 flutes, long design

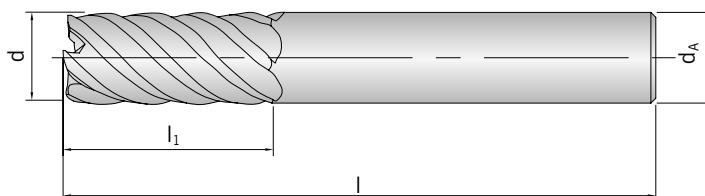

Shank DIN 6535HA	d -0,02	d _A h6	l ₁	l	z	PG 24 / Price in £ HC
						TIA70
AFH50861-060	6	6	13	57	6	33.47
AFH50861-080	8	8	19	63	6	41.57
AFH50861-100	10	10	22	72	6	63.24
AFH50861-120	12	12	26	83	6	85.73
AFH50861-140	14	14	26	83	6	107.52
AFH50861-160	16	16	32	92	6	136.56
AFH50881-180	18	18	32	92	8	169.47
AFH50881-200	20	20	38	104	8	212.18
AFH50881-250	25	25	44	104	8	377.37

HC = Carbide coated



P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application



AFH508.2-...

6 - 8 flutes, extra long design

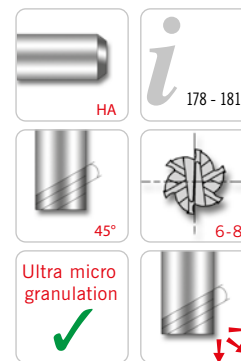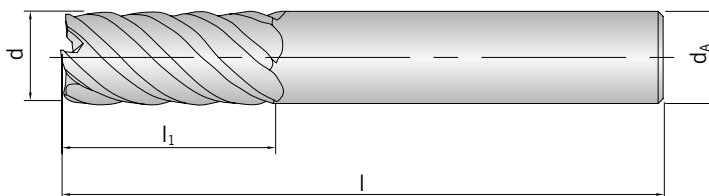

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	z	PG 24 / Price in £ HC
						TiA70
AFH50862-060	6	6	26	70	6	43.29
AFH50862-080	8	8	36	90	6	56.53
AFH50862-100	10	10	46	100	6	88.57
AFH50862-120	12	12	56	110	6	125.19
AFH50862-160	16	16	66	130	6	217.89
AFH50882-200	20	20	76	140	8	340.37
AFH50882-250	25	25	92	180	8	639.42

HC = Carbide coated

P	○
M	
K	
N	
S	
H	●


● Main application
○ Secondary application

AFH



AFH50746-...R...

4 flutes, short design, with corner radius

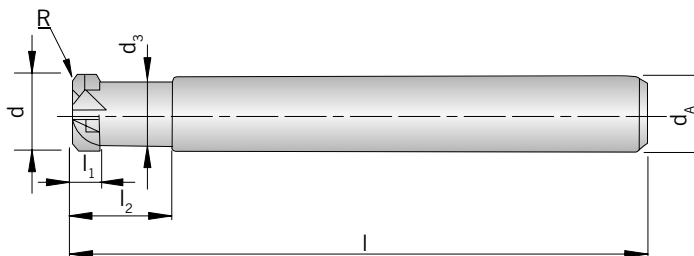

HA

182 - 187

4

R

90°

Ultra micro granulation

Shank DIN 6535HA	d -0,02	d _A h6	d ₃	l ₁	l ₂	l	R ±0,005	PG 24 / Price in £ HC
								TA70
AFH50746-020 R0.5	2	6	1.8	1.0	6	50	0.5	33.19
AFH50746-030 R0.5	3	6	2.8	1.2	8	50	0.5	33.19
AFH50746-040 R0.5	4	6	3.8	1.5	10	50	0.5	33.19
AFH50746-060 R0.5	6	6	5.4	2.5	12	60	0.5	33.19
AFH50746-060 R1.0	6	6	5.4	2.5	12	60	1.0	33.19
AFH50746-080 R1.0	8	8	7.2	3.5	16	60	1.0	42.56
AFH50746-080 R2.0	8	8	7.2	3.5	16	60	2.0	42.56
AFH50746-100 R1.0	10	10	9.0	4.0	20	70	1.0	63.49
AFH50746-100 R2.0	10	10	9.0	4.0	20	70	2.0	63.49
AFH50746-120 R2.0	12	12	11.0	5.0	25	80	2.0	87.66
AFH50746-120 R3.0	12	12	11.0	5.0	25	80	3.0	87.66

HC = Carbide coated



P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application



AFH50741-...R...

4 flutes, long design, with corner radius, High feed

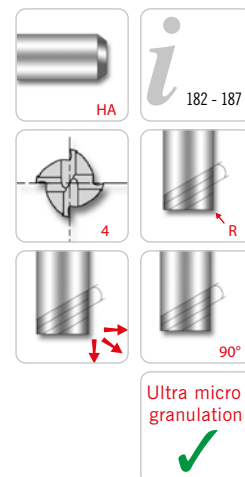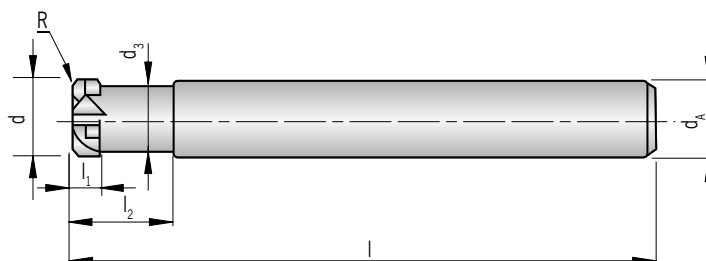

Shank DIN 6535HA	d -0,02	d _A h6	d ₃	l ₁	l ₂	l	R ±0,005	PG 24 / Price in £ HC
								TIA70
AFH50741-020 R0.5	2	6	1.8	1.0	6	70	0.5	32.75
AFH50741-030 R0.5	3	6	2.8	1.2	8	70	0.5	32.75
AFH50741-040 R0.5	4	6	3.8	1.5	10	70	0.5	32.75
AFH50741-050 R0.5	5	6	4.6	2.0	10	70	0.5	32.75
AFH50741-060 R0.5	6	6	5.4	2.5	12	90	0.5	36.59
AFH50741-060 R1.0	6	6	5.4	2.5	12	90	1.0	36.59
AFH50741-080 R1.0	8	8	7.2	3.5	16	100	1.0	46.12
AFH50741-080 R2.0	8	8	7.2	3.5	16	100	2.0	46.12
AFH50741-100 R1.0	10	10	9.0	4.0	20	100	1.0	65.19
AFH50741-100 R2.0	10	10	9.0	4.0	20	100	2.0	65.19
AFH50741-120 R2.0	12	12	11.0	5.0	25	110	2.0	90.63
AFH50741-120 R3.0	12	12	11.0	5.0	25	110	3.0	90.63
AFH50741-160 R3.0	16	16	15.0	6.5	30	130	3.0	157.43

HC = Carbide coated

P	○
M	
K	
N	
S	
H	●

● Main application
○ Secondary application



AFH



Contour milling

55-70 HRC

Ø	Hardened steel (≤ 55 HRC)			Hardened steel (55-62 HRC)			Hardened steel (62-70 HRC)		
	D [mm]	n [min ⁻¹]	v _f [mm/min]	a _e [mm]	n [min ⁻¹]	v _f [mm/min]	a _e [mm]	n [min ⁻¹]	v _f [mm/min]
1,0	40000	1200	0,05	40000	800	0,03	32000	500	0,02
2,0	40000	2000	0,10	24000	1000	0,05	16000	600	0,05
3,0	32000	3800	0,20	16000	1900	0,10	11000	1200	0,05
4,0	24000	4400	0,20	12000	2200	0,10	8000	1300	0,05
6,0	16000	5800	0,30	8000	2900	0,20	5300	1800	0,10
8,0	12000	5800	0,40	6000	2900	0,20	4000	1800	0,10
10,0	9600	5800	0,50	4800	2900	0,30	3200	1800	0,20
12,0	8000	4800	0,60	4000	2400	0,30	2700	1500	0,20
16,0	6000	3600	0,80	3000	1800	0,50	2000	1100	0,30
20,0	4800	2900	1,00	2400	1400	0,50	1600	880	0,30

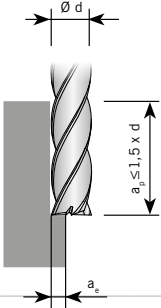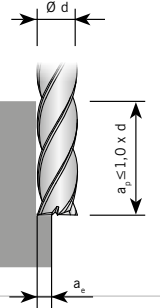



AFH

Slot milling

35-70 HRC

Ø	Steel ≤ 1400 N/mm ² (35-45 HRC)					Hardened steel ≤ 1950 N/mm ² (45-55 HRC)					Hardened steel > 2000 N/mm ² (55-70 HRC)				
	D [mm]	a _p [mm]	a _e [mm]	n [min ⁻¹]	f _z [mm]	v _f [mm/min]	a _p [mm]	a _e [mm]	n [min ⁻¹]	f _z [mm]	v _f [mm/min]	a _p [mm]	a _e [mm]	n [min ⁻¹]	f _z [mm]
1,0	0,15	1,0	15000	0,008	240	0,15	1,0	12600	0,004	100	0,15	1,0	6300	0,003	38
2,0	0,30	2,0	7600	0,010	152	0,30	2,0	6400	0,006	76	0,30	2,0	3200	0,006	38
3,0	0,45	3,0	5100	0,015	153	0,45	3,0	4200	0,010	84	0,45	3,0	2100	0,009	38
4,0	0,60	4,0	3800	0,025	190	0,60	4,0	3200	0,018	115	0,60	4,0	1600	0,013	41
5,0	0,75	5,0	3100	0,030	186	0,75	5,0	2500	0,025	125	0,75	5,0	1300	0,018	47
6,0	0,90	6,0	2500	0,038	190	0,90	6,0	2100	0,030	126	0,90	6,0	1100	0,021	46
8,0	1,20	8,0	1900	0,050	190	1,20	8,0	1600	0,040	128	1,20	8,0	800	0,028	45
10,0	1,50	10,0	1500	0,063	189	1,50	10,0	1300	0,050	130	1,50	10,0	600	0,035	42
12,0	1,80	12,0	1300	0,070	182	1,80	12,0	1100	0,055	121	1,80	12,0	500	0,039	39
16,0	2,40	16,0	955	0,085	162	2,40	16,0	800	0,060	96	2,40	16,0	400	0,043	35
20,0	3,00	20,0	765	0,112	171	3,00	20,0	640	0,070	90	3,00	20,0	340	0,049	35

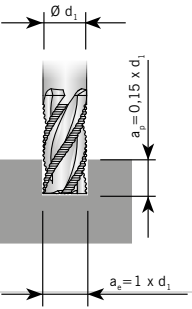


Information: Calculation is based on two tooth Z2



→ Radius 0,2 mm – 12,5 mm

Radius	Hardened steel (≤ 55 HRC)					Hardened steel (55–62 HRC)					Hardened steel (62–70 HRC)				
	α < 15°		α > 15°			α < 15°		α > 15°			α < 15°		α > 15°		
	R [mm]	n [min ⁻¹]	v _f [mm/min]	n [min ⁻¹]	v _f [mm/min]	a _p [mm]	n [min ⁻¹]	v _f [mm/min]	n [min ⁻¹]	v _f [mm/min]	a _p [mm]	n [min ⁻¹]	v _f [mm/min]	n [min ⁻¹]	v _f [mm/min]
2,0	32000	10880	20000	3600	0,15	24000	6200	12000	1900	0,13	12000	2400	8000	800	0,10
2,5	25000	9000	16000	2900	0,20	19000	5300	9600	1700	0,15	9600	2100	6000	600	0,10
3,0	21000	8400	13000	2600	0,25	16000	4800	8000	1600	0,20	8000	1700	5000	600	0,11
4,0	16000	6400	10000	2000	0,30	12000	3600	6000	1200	0,20	6000	1400	4000	480	0,11
4,5	14500	5800	9000	1800	0,40	11000	3300	5400	1080	0,20	5400	1200	3500	450	0,11
5,0	13000	5200	8000	1700	0,50	10000	3200	4800	960	0,20	4800	1100	3000	420	0,12
5,5	11000	4400	7000	1450	0,50	8500	2550	4200	840	0,30	3600	860	2200	310	0,12
6,0	9000	3600	6000	1300	0,50	7000	2200	3600	720	0,30	3000	780	1850	290	0,12
8,0	6000	2400	4000	1000	0,50	5000	1600	2500	500	0,30	2500	650	1500	240	0,15
9,0	5500	2200	3500	875	0,50	4500	1400	2100	420	0,30	2200	570	1250	200	0,15
10,0	4500	1800	3000	780	0,50	4000	1300	1800	360	0,30	1800	470	1000	160	0,15
12,5	3500	1400	2000	520	0,50	3500	1100	1500	300	0,30	1500	390	700	105	0,15





Information:

1. In case of unstable workpiece or tool clamping or heavy vibration during machining, we recommend proportional reduction of feed rate and revolutions.
2. At low cutting depths, revolutions and feed rate can be increased.
3. "α" is the machine angle.



Tighter radius tolerance

0,005-0,010 mm

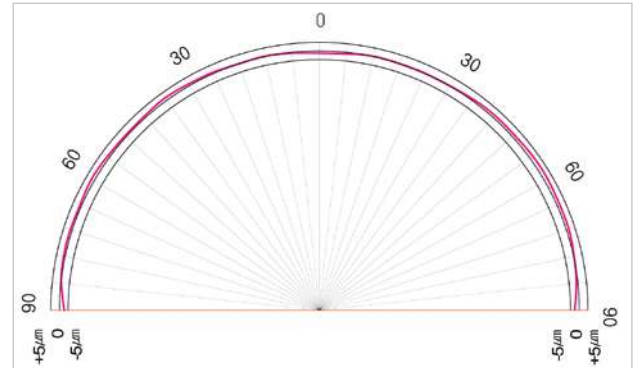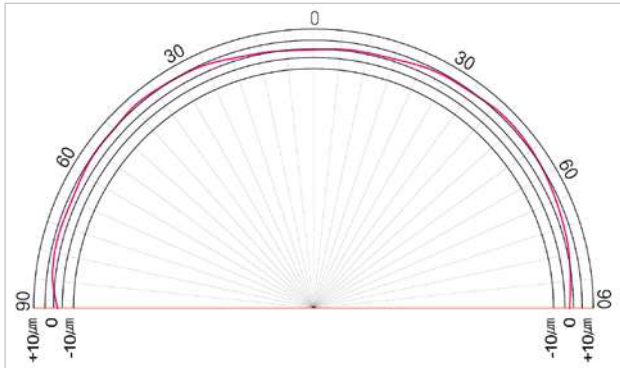

Tighter radius tolerance $\pm 0,005$ mm for a higher accuracy and longer tool life.

AFH

Polished surface and specifically engineered coating for the best results also for high speed machining:



High end-mill




Normal end-mill

Special coating give consistent result in high speed cutting of high hardness materials.

Comparison of the endteeth shape: High feed end-mill – normal end-mill



High end-mill





Normal end-mill



Comparison of the endteeth shape: **High feed end-mill** – **normal end-mill**




Extra short flutes length for high rigidity.
 Reduced clearance angles and short strengthens corner radius and reduces chattering.

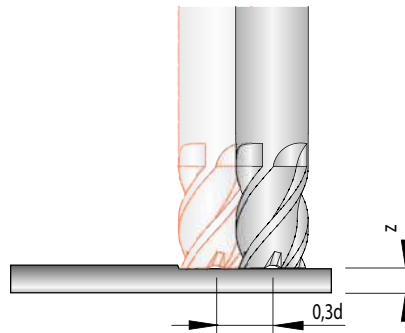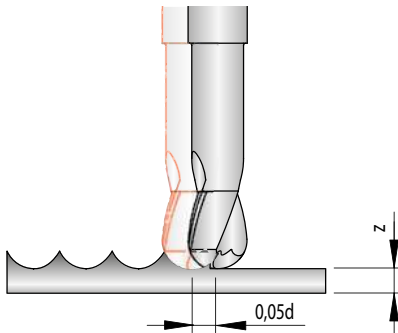


Example of performance

(HRC 50 - 55)


Item	Size	Revolution	Feed rate	Depth of cut	
	[mm]	[U/min] / RPM	[mm/U]	Z [mm]	X-Y [mm]
High feed end-mill	Ø10 R2	5400	11000	0,2	3,0



Ball-nose milling cutter



End-mill



Torus end-mill

AFH



ISO	Material	Strength [N/mm ²]	Medium machining V_c [m/min]	Rough machining V_c [m/min]	Medium $d_1 = 2$ mm		Roughing $d_1 = 2$ mm	
					a_D [mm]	f_z [mm]	a_D [mm]	f_z [mm]
P	General construction steel	< 800	250-300	150-250	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3
	Free cutting steel	< 800	250-300	150-250	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3
	Case hardened steel, non alloyed	< 800	250-300	150-250	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3
	Alloyed case hardened steel	< 1000	200-250	180-200	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3
	Tempering steel, non alloyed	< 850	220-250	200-220	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3
	Tempering steel, non alloyed	< 1000	220-250	200-220	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3
	Tempering steel, alloyed	< 800	170-190	170-190	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3
	Tempering steel, alloyed	< 1300	160-180	160-180	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3
	Steel castings	< 850	220-250	200-220	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3
	Nitriding steel	< 1000	170-190	170-190	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3
	Nitriding steel	< 1200	160-180	160-180	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3
	Roller bearing steel	< 1200	170-190	170-190	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3
	Spring steel	< 1200	100-120	100-120	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3
	High-speed steel	< 1300	80-100	80-100	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3
	Cold working tool steel	< 1300	140-180	140-180	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3
Hot working tool steel	< 1300	140-180	140-180	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3	
M	Steel and sulphured cast stainless steel	< 850						
	Stainless steel, ferritic	< 750						
	Stainless steel, martensitic	< 900						
	Stainless steel, ferritic / martensitic	< 1100						
	Stainless steel, austenitic / ferritic	< 850						
	Stainless steel, austenitic	< 750						
	Heat resistant steel	< 1100						
K	Grey cast iron with lamellar graphite	100-350						
	Grey cast iron with lamellar graphite	300-1000						
	Spheroidal cast iron	300-500						
	Spheroidal cast iron	550-800						
	White cast iron, tempered	350-450						
	White cast iron, tempered	500-650						
	Black cast iron, tempered	350-450						
	Black cast iron, tempered	500-700						
N	Aluminium (non alloyed, low alloyed)	< 350						
	Aluminium alloys < 0,5% Si	< 500						
	Aluminium alloys 0,5% - 10% Si	< 400						
	Aluminium alloys 10% - 15% Si	< 400						
	Aluminium alloys > 15% Si	< 400						
	Copper (non alloyed, low alloyed)	< 350						
	Copper wrought alloys	< 700						
	Special copper alloys	< 200 HB						
	Special copper alloys	< 300 HB						
	Special copper alloys	> 300 HB						
	Short-chipping brass, bronze, red bronze	< 600						
	Long-chipping brass	< 600						
	Thermoplastics							
	Duroplastics							
	Fibre-reinforced plastics							
Magnesium and magnesium alloys	< 850							
Graphite								
Tungsten and tungsten alloys								
Molybdenum and molybdenum alloys								
S	Pure nickel							
	Nickel alloys							
	Nickel alloys	< 850						
	Nickel-chromium alloys							
	Nickel and cobalt alloys	< 1300						
	Nickel and cobalt alloys	< 1300						
	Heat resistant alloys	< 1400						
	Nickel-cobalt-chromium alloys	< 1300						
	Pure titanium	< 900						
	Titanium alloys	< 700						
Titanium alloys	< 1200							
H	Tempered steel	< 45 HRC	160-190	160-190	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3
		46-55 HRC	150-180	80-120	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,3
		56-60 HRC	120-150	80-100	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,25
		61-65 HRC	80-110	60-90	0,05-0,2	0,1-0,2	0,2-0,3	0,2-0,25
		65-70 HRC						

The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.

Recommended cutting data solid carbide High feed end-mill

Approximate values Feed per tooth f_z [mm]



AFH

Medium $d_1 = 3$ mm		Roughing $d_1 = 3$ mm		Medium $d_1 = 4$ mm		Roughing $d_1 = 4$ mm		Medium $d_1 = 6$ mm		Roughing $d_1 = 6$ mm	
a_D [mm]	f_z [mm]	a_D [mm]	f_z [mm]	a_D [mm]	f_z [mm]	a_D [mm]	f_z [mm]	a_D [mm]	f_z [mm]	a_D [mm]	f_z [mm]
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,22-0,35
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,25	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,2-0,3
0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,25	0,1-0,2	0,1-0,2	0,2-0,3	0,2-0,3	0,1-0,2	0,1-0,22	0,2-0,3	0,2-0,3

AFH

The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.



ISO	Material	Strength [N/mm ²]	Medium machining V_c [m/min]	Rough machining V_c [m/min]	Medium $d_1 = 8$ mm		Roughing $d_1 = 8$ mm	
					a_p [mm]	f_z [mm]	a_p [mm]	f_z [mm]
P	General construction steel	< 800	250 - 300	150-250	0,1-0,2	0,1-0,3	0,2-0,3	0,3-0,5
	Free cutting steel	< 800	250-300	150-250	0,1-0,2	0,1-0,3	0,2-0,3	0,3-0,5
	Case hardened steel, non alloyed	< 800	250-300	150-250	0,1-0,2	0,1-0,3	0,2-0,3	0,3-0,5
	Alloyed case hardened steel	< 1000	200-250	180-200	0,1-0,2	0,1-0,25	0,2-0,3	0,25-0,4
	Tempering steel, non alloyed	< 850	220-250	200-220	0,1-0,2	0,1-0,25	0,2-0,3	0,25-0,4
	Tempering steel, non alloyed	< 1000	220-250	200-220	0,1-0,2	0,1-0,25	0,2-0,3	0,25-0,4
	Tempering steel, alloyed	< 800	170-190	170-190	0,1-0,2	0,1-0,25	0,2-0,3	0,25-0,4
	Tempering steel, alloyed	< 1300	160-180	160-180	0,1-0,2	0,1-0,25	0,2-0,3	0,25-0,4
	Steel castings	< 850	220-250	200-220	0,1-0,2	0,1-0,25	0,2-0,3	0,25-0,4
	Nitriding steel	< 1000	170-190	170-190	0,1-0,2	0,1-0,25	0,2-0,3	0,25-0,4
	Nitriding steel	< 1200	160-180	160-180	0,1-0,2	0,1-0,25	0,2-0,3	0,25-0,4
	Roller bearing steel	< 1200	170-190	170-190	0,1-0,2	0,1-0,25	0,2-0,3	0,25-0,4
	Spring steel	< 1200	100-120	100-120	0,1-0,2	0,1-0,25	0,2-0,3	0,25-0,4
	High-speed steel	< 1300	80-100	80-100	0,1-0,2	0,1-0,25	0,2-0,3	0,25-0,4
	Cold working tool steel	< 1300	140-180	140-180	0,1-0,2	0,1-0,25	0,2-0,3	0,25-0,4
Hot working tool steel	< 1300	140-180	140-180	0,1-0,2	0,1-0,25	0,2-0,3	0,25-0,4	
M	Steel and sulphured cast stainless steel	< 850						
	Stainless steel, ferritic	< 750						
	Stainless steel, martensitic	< 900						
	Stainless steel, ferritic/martensitic	< 1100						
	Stainless steel, austenitic/ferritic	< 850						
	Stainless steel, austenitic	< 750						
Heat resistant steel	< 1100							
K	Grey cast iron with lamellar graphite	100-350						
	Grey cast iron with lamellar graphite	300-1000						
	Spheroidal cast iron	300-500						
	Spheroidal cast iron	550-800						
	White cast iron, tempered	350-450						
	White cast iron, tempered	500-650						
	Black cast iron, tempered	350-450						
	Black cast iron, tempered	500-700						
N	Aluminium (non alloyed, low alloyed)	< 350						
	Aluminium alloys < 0,5% Si	< 500						
	Aluminium alloys 0,5% - 10% Si	< 400						
	Aluminium alloys 10% - 15% Si	< 400						
	Aluminium alloys > 15% Si	< 400						
	Copper (non alloyed, low alloyed)	< 350						
	Copper wrought alloys	< 700						
	Special copper alloys	< 200 HB						
	Special copper alloys	< 300 HB						
	Special copper alloys	> 300 HB						
	Short-chipping brass, bronze, red bronze	< 600						
	Long-chipping brass	< 600						
	Thermoplastics							
	Duroplastics							
	Fibre-reinforced plastics							
Magnesium and magnesium alloys	< 850							
Graphite								
Tungsten and tungsten alloys								
Molybdenum and molybdenum alloys								
S	Pure nickel							
	Nickel alloys							
	Nickel alloys	< 850						
	Nickel-chromium alloys							
	Nickel and cobalt alloys	< 1300						
	Nickel and cobalt alloys	< 1300						
	Heat resistant alloys	< 1400						
	Nickel-cobalt-chromium alloys	< 1300						
	Pure titanium	< 900						
	Titanium alloys	< 700						
Titanium alloys	< 1200							
H	Tempered steel	< 45 HRC	160-190	160-190	0,1-0,2	0,1-0,3	0,2-0,3	0,3-0,5
		46-55 HRC	150-180	80-120	0,1-0,2	0,1-0,25	0,2-0,3	0,25-0,4
		56-60 HRC	120-150	80-100	0,1-0,2	0,1-0,25	0,2-0,3	0,2-0,3
		61-65 HRC	80-110	60-90	0,1-0,2	0,1-0,25	0,2-0,3	0,2-0,3
		65-70 HRC						

The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.

IDEAL FOR EXOTICS AND STAINLESS STEEL.



Especially developed for milling stainless steel and exotic materials such as titanium, Inconel® and Hastelloy®. Also suitable for high speed milling.





AFJ612.1-...

3 - 4 flutes, long design

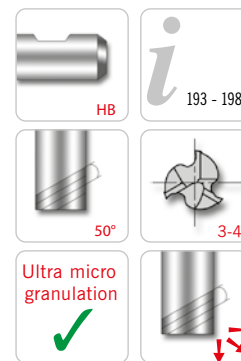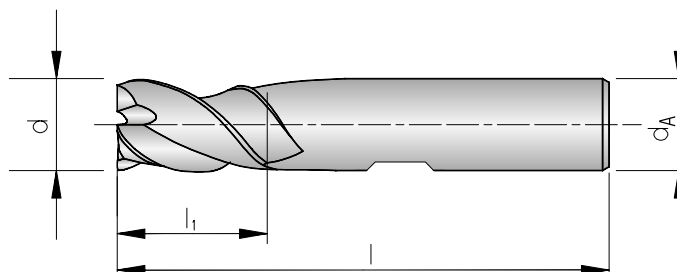

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	z	PG 24 / Price in £ HC
						TAIN
AFJ61231-030A	3	6	8	52	3	18.52
AFJ61231-040A	4	6	11	55	3	18.52
AFJ61231-050A	5	6	13	57	3	18.52
AFJ61231-060	6	6	13	50	3	17.56
AFJ61231-060A	6	6	13	57	3	17.56
AFJ61231-080	8	8	19	60	3	21.25
AFJ61231-080A	8	8	19	63	3	21.25
AFJ61231-100	10	10	22	70	3	35.96
AFJ61231-100A	10	10	22	72	3	35.96
AFJ61231-120	12	12	25	75	3	42.81
AFJ61231-120A	12	12	25	83	3	42.81
AFJ61231-160	16	16	32	90	3	65.23
AFJ61231-160A	16	16	32	92	3	65.23
AFJ61241-200	20	20	38	100	4	117.74
AFJ61241-200A	20	20	38	104	4	117.74
AFJ61241-250	25	25	45	120	4	187.31
AFJ61241-250A	25	25	45	121	4	187.31

HC = Carbide coated



P	○
M	●
K	○
N	○
S	●
H	○

● Main application
○ Secondary application



AFJ602.0-...

4 - 8 flutes, short design

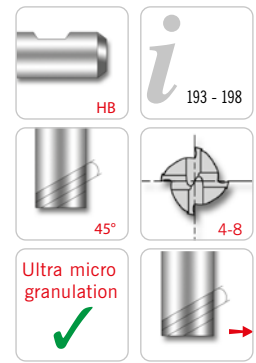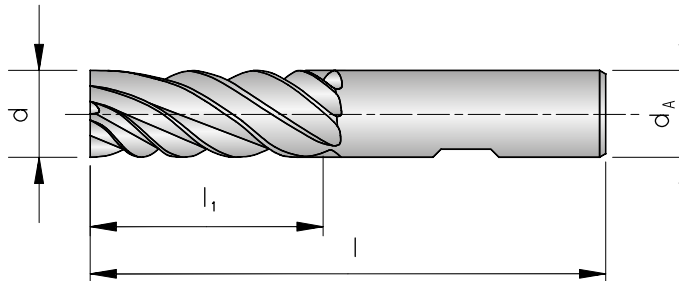

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	z	PG 24 / Price in £ HC
						TAIN
AFJ60240-030	3	6	8	52	4	15.02
AFJ60240-040	4	6	11	55	4	15.02
AFJ60240-050	5	6	13	57	4	15.02
AFJ60260-060	6	6	13	57	6	13.39
AFJ60260-080	8	8	19	63	6	16.08
AFJ60260-100	10	10	22	72	6	27.27
AFJ60260-120	12	12	26	83	6	32.29
AFJ60260-140	14	14	26	83	6	54.72
AFJ60260-160	16	16	32	92	6	50.33
AFJ60280-200	20	20	38	104	8	79.96

HC = Carbide coated

P	○
M	●
K	
N	
S	●
H	


● Main application
○ Secondary application

AFJ



AFJ619.1-...

3 - 6 flutes, long design

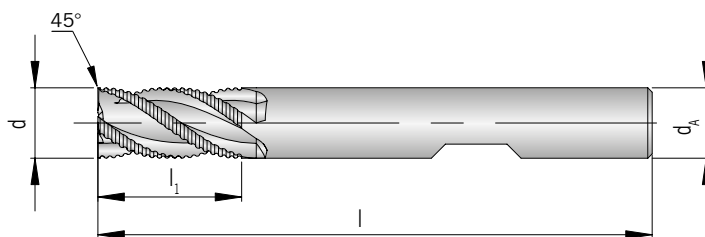

HB

193 - 198

3-6

45°

45°

Ultra micro granulation

Shank DIN 6535HB	d h10	d _A h6	l ₁	l	Chamfer	z	PG 24 / Price in £ HC
							TiAlN
AFJ61931-040	4	6	11	57	0,1 x 45°	3	39.82
AFJ61941-050	5	6	13	57	0,13 x 45°	4	39.82
AFJ61941-060	6	6	16	57	0,15 x 45°	4	39.82
AFJ61941-080	8	8	16	63	0,18 x 45°	4	44.81
AFJ61941-100	10	10	22	72	0,2 x 45°	4	63.71
AFJ61941-120	12	12	26	83	0,2 x 45°	4	75.58
AFJ61941-140	14	14	26	83	0,2 x 45°	4	104.40
AFJ61951-160	16	16	32	92	0,2 x 45°	5	118.08
AFJ61961-200	20	20	38	104	0,2 x 45°	6	165.56
AFJ61961-250	25	25	45	121	0,2 x 45°	6	225.77

HC = Carbide coated

P	○
M	●
K	
N	
S	●
H	

● Main application
○ Secondary application




Material group	Structure of the material groups and identification letters		Brinell hardness HB	Tensile strength Rm (N/mm ²)	Chipping group	Correction factor	Cutting speed V _c (m/min)		
							VHM	TAIN	
P	Unalloyed steel	C ≤ 0.25 % annealed	125	428	P1	1,2	100 - 170 - 240		
		C > 0.25 ... ≤ 0.55 % annealed	190	639	P2	1,2	100 - 170 - 240		
		C > 0.25 ... ≤ 0.55 % hardened and tempered	210	708	P3	1,2	90 - 155 - 220		
		C > 0.55 % annealed	190	639	P4	1,2	100 - 170 - 240		
		C > 0.55 % hardened and tempered	300	1013	P5	1,0	60 - 100 - 140		
		Machining steel (short-chipping) tempered	220	745	P6	1,2	100 - 170 - 240		
	Low alloyed steel		annealed	175	591	P7	1,2	90 - 145 - 200	
			hardened and tempered	300	1013	P8	1,0	90 - 105 - 120	
			hardened and tempered	380	1282	P9	0,8	60 - 90 - 120	
			hardened and tempered	430	1477	P10	0,8	60 - 90 - 120	
	High alloyed steel and high alloyed tool steel		annealed	200	675	P11	1,2	90 - 145 - 200	
			hardened	300	1013	P12	1,0	90 - 115 - 140	
			hardened	400	1361	P13	0,8	60 - 85 - 110	
	Stainless steel		ferritic / martensitic, annealed	200	675	P14	1,0	50 - 85 - 120	
			martensitic, hardened and tempered	330	1114	P15	0,9	30 - 55 - 80	
M	Stainless steel	austenitic, chilled	200	675	M1	1,0	60 - 90 - 120		
		austenitic, precipitation-hardened (PH)	300	1013	M2	0,9	30 - 55 - 80		
		austenitic-ferritic, Duplex	230	778	M3	1,0	50 - 85 - 120		
K	Malleable cast iron	ferritic	200	675	K1		-		
		pearlitic	260	867	K2		-		
	Cast iron	low tensile strength	180	602	K3		-		
		high tensile strength / austenitic	245	825	K4		-		
	Cast iron with nodular graphite	ferritic	155	518	K5		-		
		pearlitic	265	885	K6		-		
GGV (CGI)		200	675	K7		-			
N	Aluminium alloys long chipping	not heat treatable	30	-	N1		-		
		heat treatable, heat treated	100	343	N2		-		
	Casted aluminium alloys	≤ 12 % Si, not heat treatable	75	260	N3		-		
		≤ 12 % Si, aushärtbar, ausgehärtet	90	314	N4		-		
		> 12 % Si, not heat treatable	130	447	N5		-		
	Magnesium alloys		70	250	N6		-		
	Copper and copper alloys (Brass / Bronze)		Unalloyed, elektrolyte copper	100	343	N7		-	
			Brass, Bronze	90	314	N8		-	
			Cu-alloys, short-chipping	110	382	N9		-	
			High-tensile, Ampco	300	1013	N10		-	
Non-ferrous materials		Lead alloys (without abrasive filling material)	-	-	N11		-		
		Duroplastic (without abrasive filling material)	-	-	N12		-		
		Plastic glas fibre reinforced GFRP	-	-	N13		-		
		Plastic carbon fibre reinforced CFRP	-	-	N14		-		
		Plastic aramid fibre reinforced AFRP	-	-	N15		-		
		Graphite (tech.)	80 Shore	-	N16		-		
S	High temperature resistant alloys	Fe-Basis	annealed	200	675	S1	0,7	30 - 60 - 90	
			heat treated	280	943	S2	0,7	30 - 60 - 90	
		Ni- or Co-alloyed	annealed	250	839	S3	0,9	30 - 50 - 70	
			heat treated	350	1177	S4	0,7	30 - 55 - 80	
			casting	320	1076	S5	0,7	30 - 55 - 80	
	Titanium alloys		Pure titan	200	675	S6	1,0	50 - 85 - 120	
			α- and β-alloys, heat treated	375	1262	S7	1,0	40 - 75 - 110	
			β-alloys	410	1396	S8	1,0	40 - 75 - 110	
	Wolfram alloys		300	1013	S9		-		
	Molybdän alloys		300	1013	S10		-		
H	Hardened steel		hardened	50 HRC	-	H1		-	
			hardened	55 HRC	-	H2		-	
			hardened	60 HRC	-	H3		-	
	Hardened cast iron		hardened	55 HRC	-	H4		-	

The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.




Feed per tooth with radial depth of cut of 60% of the cutter ($\varnothing d_1$)

$\varnothing d_1$ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,002	0,002	0,002
2	0,003	0,002	0,002	0,002	0,003	0,003	0,004	0,005	0,005	0,006
3	0,005	0,003	0,004	0,004	0,005	0,006	0,007	0,008	0,009	0,009
4	0,006	0,004	0,005	0,005	0,007	0,007	0,009	0,010	0,011	0,012
5	0,008	0,005	0,006	0,007	0,009	0,010	0,012	0,013	0,015	0,016
6	0,009	0,006	0,007	0,008	0,010	0,011	0,014	0,015	0,017	0,018
8	0,013	0,009	0,010	0,011	0,014	0,015	0,019	0,020	0,023	0,024
10	0,016	0,011	0,013	0,014	0,017	0,019	0,024	0,026	0,029	0,030
12	0,019	0,013	0,015	0,017	0,021	0,023	0,029	0,031	0,035	0,037
14	0,022	0,015	0,018	0,020	0,025	0,027	0,034	0,036	0,040	0,043
16	0,026	0,018	0,020	0,023	0,028	0,031	0,039	0,041	0,046	0,049
18	0,029	0,020	0,023	0,026	0,032	0,035	0,043	0,046	0,052	0,055
20	0,032	0,022	0,026	0,029	0,035	0,039	0,048	0,052	0,058	0,061
25	0,040	0,028	0,032	0,036	0,045	0,049	0,061	0,065	0,073	0,077

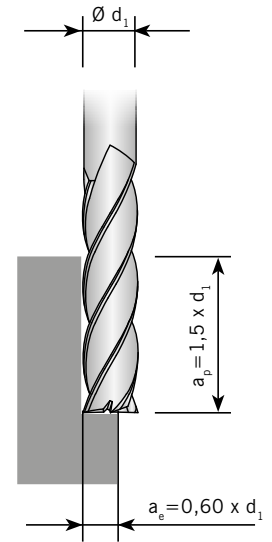

Feed per tooth with radial depth of cut of 80% of the cutter ($\varnothing d_1$)

$\varnothing d_1$ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001
2	0,002	0,001	0,002	0,002	0,002	0,003	0,003	0,004	0,004	0,004
3	0,004	0,002	0,003	0,003	0,004	0,004	0,006	0,006	0,007	0,007
4	0,005	0,003	0,004	0,004	0,005	0,006	0,007	0,008	0,009	0,009
5	0,006	0,004	0,005	0,005	0,007	0,007	0,009	0,010	0,011	0,012
6	0,007	0,005	0,006	0,006	0,008	0,009	0,011	0,012	0,013	0,014
8	0,010	0,007	0,008	0,009	0,011	0,012	0,015	0,016	0,018	0,019
10	0,012	0,008	0,010	0,011	0,013	0,015	0,018	0,020	0,022	0,023
12	0,015	0,010	0,012	0,013	0,016	0,018	0,022	0,024	0,027	0,028
14	0,017	0,012	0,014	0,015	0,019	0,021	0,026	0,028	0,031	0,033
16	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
18	0,022	0,015	0,018	0,020	0,024	0,027	0,033	0,036	0,040	0,042
20	0,025	0,017	0,020	0,022	0,027	0,030	0,037	0,040	0,045	0,047
25	0,031	0,022	0,025	0,028	0,034	0,037	0,047	0,050	0,056	0,059

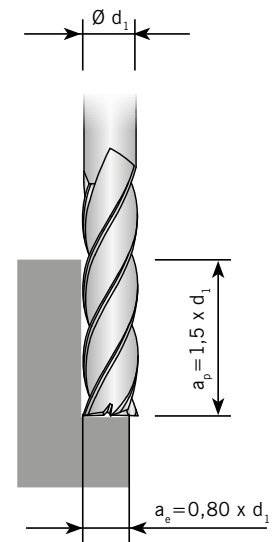


Attention: Take the correction factor from the table "Cutting speeds".
 Correction factor -> 1,1 with $a_p = 1 \times d_1$ -> 1,2 with $a_p = 0,5 \times d_1$




Feed per tooth when full slot milling → $a_p = 0,5 \times d_1$

Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,002	0,001	0,001	0,001	0,002	0,002	0,003	0,003	0,003	0,003
2	0,004	0,002	0,003	0,003	0,004	0,004	0,006	0,006	0,007	0,007
3	0,007	0,004	0,005	0,006	0,007	0,008	0,010	0,011	0,012	0,013
4	0,009	0,006	0,007	0,008	0,009	0,010	0,013	0,014	0,016	0,017
5	0,011	0,007	0,008	0,009	0,012	0,013	0,016	0,017	0,019	0,020
6	0,013	0,009	0,010	0,011	0,014	0,015	0,019	0,020	0,023	0,024
8	0,018	0,012	0,014	0,016	0,019	0,021	0,027	0,028	0,032	0,034
10	0,022	0,015	0,017	0,019	0,024	0,026	0,033	0,035	0,039	0,041
12	0,030	0,021	0,024	0,027	0,033	0,036	0,045	0,048	0,054	0,057
14	0,032	0,022	0,025	0,028	0,035	0,038	0,048	0,051	0,057	0,060
16	0,036	0,025	0,028	0,032	0,039	0,043	0,054	0,057	0,064	0,068
18	0,042	0,029	0,033	0,037	0,046	0,050	0,063	0,067	0,075	0,079
20	0,045	0,031	0,036	0,040	0,049	0,054	0,067	0,072	0,081	0,085
25	0,056	0,039	0,044	0,050	0,061	0,067	0,084	0,089	0,100	0,106

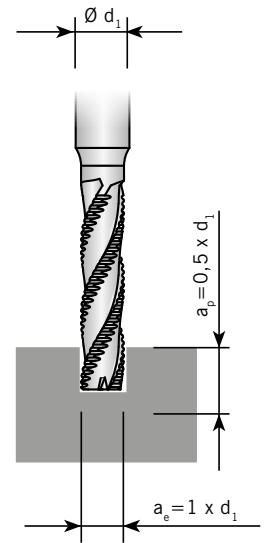

Feed per tooth when full slot milling → $a_p = 1 \times d_1$

Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,002	0,002	0,002	0,002	0,002
2	0,003	0,002	0,002	0,002	0,003	0,003	0,004	0,004	0,005	0,005
3	0,005	0,003	0,004	0,004	0,005	0,005	0,007	0,007	0,008	0,009
4	0,006	0,004	0,005	0,005	0,006	0,007	0,009	0,009	0,011	0,011
5	0,007	0,005	0,006	0,006	0,008	0,009	0,011	0,011	0,013	0,014
6	0,008	0,006	0,007	0,008	0,009	0,010	0,013	0,014	0,015	0,016
8	0,012	0,008	0,009	0,011	0,013	0,014	0,018	0,019	0,021	0,022
10	0,014	0,010	0,011	0,013	0,016	0,017	0,021	0,023	0,026	0,027
12	0,020	0,014	0,016	0,018	0,021	0,023	0,029	0,031	0,035	0,037
14	0,021	0,015	0,017	0,019	0,023	0,025	0,031	0,033	0,037	0,040
16	0,023	0,016	0,019	0,021	0,026	0,028	0,035	0,037	0,042	0,044
18	0,027	0,019	0,022	0,025	0,030	0,033	0,041	0,044	0,049	0,052
20	0,029	0,020	0,023	0,026	0,032	0,035	0,044	0,047	0,053	0,056
25	0,036	0,025	0,029	0,033	0,040	0,044	0,055	0,058	0,066	0,069

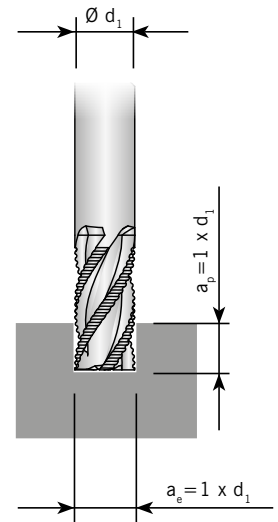


Attention: Feed rates are reduced by 10-20% for uncoated tools.

AFJ




Feed per tooth with radial depth of cut of 60% of the cutter ($\varnothing d_1$)

$\varnothing d_1$ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,002	0,002	0,002
2	0,003	0,002	0,002	0,002	0,003	0,003	0,004	0,005	0,005	0,006
3	0,005	0,003	0,004	0,004	0,005	0,006	0,007	0,008	0,009	0,009
4	0,006	0,004	0,005	0,005	0,007	0,007	0,009	0,010	0,011	0,012
5	0,008	0,005	0,006	0,007	0,009	0,010	0,012	0,013	0,015	0,016
6	0,009	0,006	0,007	0,008	0,010	0,011	0,014	0,015	0,017	0,018
8	0,013	0,009	0,010	0,011	0,014	0,015	0,019	0,020	0,023	0,024
10	0,016	0,011	0,013	0,014	0,017	0,019	0,024	0,026	0,029	0,030
12	0,019	0,013	0,015	0,017	0,021	0,023	0,029	0,031	0,035	0,037
14	0,022	0,015	0,018	0,020	0,025	0,027	0,034	0,036	0,040	0,043
16	0,026	0,018	0,020	0,023	0,028	0,031	0,039	0,041	0,046	0,049
18	0,029	0,020	0,023	0,026	0,032	0,035	0,043	0,046	0,052	0,055
20	0,032	0,022	0,026	0,029	0,035	0,039	0,048	0,052	0,058	0,061
25	0,040	0,028	0,032	0,036	0,045	0,049	0,061	0,065	0,073	0,077

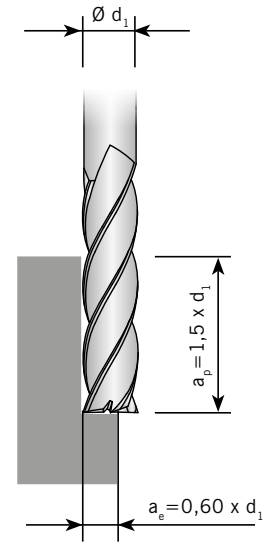

Feed per tooth with radial depth of cut of 80% of the cutter ($\varnothing d_1$)

$\varnothing d_1$ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001
2	0,002	0,001	0,002	0,002	0,002	0,003	0,003	0,004	0,004	0,004
3	0,004	0,002	0,003	0,003	0,004	0,004	0,006	0,006	0,007	0,007
4	0,005	0,003	0,004	0,004	0,005	0,006	0,007	0,008	0,009	0,009
5	0,006	0,004	0,005	0,005	0,007	0,007	0,009	0,010	0,011	0,012
6	0,007	0,005	0,006	0,006	0,008	0,009	0,011	0,012	0,013	0,014
8	0,010	0,007	0,008	0,009	0,011	0,012	0,015	0,016	0,018	0,019
10	0,012	0,008	0,010	0,011	0,013	0,015	0,018	0,020	0,022	0,023
12	0,015	0,010	0,012	0,013	0,016	0,018	0,022	0,024	0,027	0,028
14	0,017	0,012	0,014	0,015	0,019	0,021	0,026	0,028	0,031	0,033
16	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
18	0,022	0,015	0,018	0,020	0,024	0,027	0,033	0,036	0,040	0,042
20	0,025	0,017	0,020	0,022	0,027	0,030	0,037	0,040	0,045	0,047
25	0,031	0,022	0,025	0,028	0,034	0,037	0,047	0,050	0,056	0,059

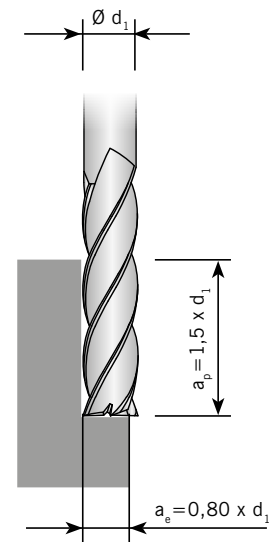


Attention: Take the correction factor from the table "Cutting speeds".
Correction factor -> 1,1 with $a_p = 1 \times d_1$ -> 1,2 with $a_p = 0,5 \times d_1$




Feed per tooth when full slot milling → $a_p = 0,5 \times d_1$

Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,002	0,001	0,001	0,001	0,002	0,002	0,003	0,003	0,003	0,003
2	0,004	0,002	0,003	0,003	0,004	0,004	0,006	0,006	0,007	0,007
3	0,007	0,004	0,005	0,006	0,007	0,008	0,010	0,011	0,012	0,013
4	0,009	0,006	0,007	0,008	0,009	0,010	0,013	0,014	0,016	0,017
5	0,011	0,007	0,008	0,009	0,012	0,013	0,016	0,017	0,019	0,020
6	0,013	0,009	0,010	0,011	0,014	0,015	0,019	0,020	0,023	0,024
8	0,018	0,012	0,014	0,016	0,019	0,021	0,027	0,028	0,032	0,034
10	0,022	0,015	0,017	0,019	0,024	0,026	0,033	0,035	0,039	0,041
12	0,030	0,021	0,024	0,027	0,033	0,036	0,045	0,048	0,054	0,057
14	0,032	0,022	0,025	0,028	0,035	0,038	0,048	0,051	0,057	0,060
16	0,036	0,025	0,028	0,032	0,039	0,043	0,054	0,057	0,064	0,068
18	0,042	0,029	0,033	0,037	0,046	0,050	0,063	0,067	0,075	0,079
20	0,045	0,031	0,036	0,040	0,049	0,054	0,067	0,072	0,081	0,085
25	0,056	0,039	0,044	0,050	0,061	0,067	0,084	0,089	0,100	0,106

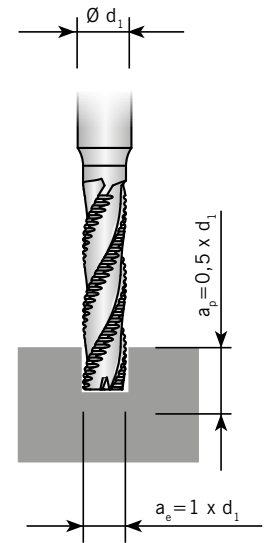

Feed per tooth when full slot milling → $a_p = 1 \times d_1$

Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,002	0,002	0,002	0,002	0,002
2	0,003	0,002	0,002	0,002	0,003	0,003	0,004	0,004	0,005	0,005
3	0,005	0,003	0,004	0,004	0,005	0,005	0,007	0,007	0,008	0,009
4	0,006	0,004	0,005	0,005	0,006	0,007	0,009	0,009	0,011	0,011
5	0,007	0,005	0,006	0,006	0,008	0,009	0,011	0,011	0,013	0,014
6	0,008	0,006	0,007	0,008	0,009	0,010	0,013	0,014	0,015	0,016
8	0,012	0,008	0,009	0,011	0,013	0,014	0,018	0,019	0,021	0,022
10	0,014	0,010	0,011	0,013	0,016	0,017	0,021	0,023	0,026	0,027
12	0,020	0,014	0,016	0,018	0,021	0,023	0,029	0,031	0,035	0,037
14	0,021	0,015	0,017	0,019	0,023	0,025	0,031	0,033	0,037	0,040
16	0,023	0,016	0,019	0,021	0,026	0,028	0,035	0,037	0,042	0,044
18	0,027	0,019	0,022	0,025	0,030	0,033	0,041	0,044	0,049	0,052
20	0,029	0,020	0,023	0,026	0,032	0,035	0,044	0,047	0,053	0,056
25	0,036	0,025	0,029	0,033	0,040	0,044	0,055	0,058	0,066	0,069

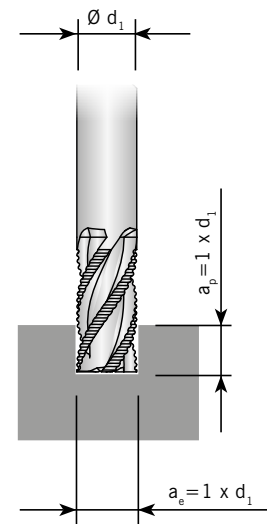

Attention: Feed rates are reduced by 10-20% for uncoated tools.

AFJ



Vorschübe für Vollradius- und Torusfräser

	Ball nose end milling cutters	Ball nose end milling cutters	Ball nose cutter for mold	Torus end milling cutters	Torus end milling cutters
d_1 [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]
2	0,015	0,010	0,005	0,010	0,015
3	0,030	0,020	0,015	0,015	0,020
4	0,040	0,030	0,030	0,020	0,030
5	0,060	0,050	0,050	0,030	0,040
6	0,070	0,060	0,060	0,050	0,060
8	0,100	0,080	0,070	0,070	0,080
10	0,120	0,100	0,080	0,080	0,100
12	0,150	0,120	0,090	0,100	0,120
16	0,180	0,150	0,100	0,120	0,150
18	0,200	0,180	0,110	0,140	0,160
20	0,220	0,200	0,120	0,150	0,180
25	0,250	0,240	0,140	0,170	0,200

Attention: Feed rates are reduced by 10-20% for uncoated tools.

AFJ


ROUGHING TO YOUR REQUIREMENTS.

The cutter design with uneven pitch, 43° - 46° , is suitable for milling alloy steel, non-alloy steel, cast iron and hardened materials up to 40HRC.





AFR619.0-...
4 - 5 flutes, short design

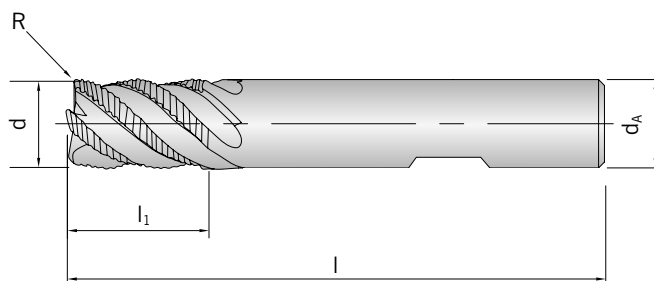

Shank DIN 6535HB	d -0,05	d _A h6	l ₁	l	R	z	PG 24 / Price in £ HC
							TiAlN
AFR61940-060	6	6	9	57	0.5	4	42.78
AFR61940-080	8	8	12	63	0.5	4	48.70
AFR61940-100	10	10	15	72	0.5	4	66.92
AFR61940-120	12	12	18	83	0.5	4	86.81
AFR61950-160	16	16	24	92	1.0	5	124.07
AFR61950-200	20	20	30	104	1.0	5	200.46

HC = Carbide coated

P	●
M	
K	●
N	
S	○
H	



● Main application
○ Secondary application

AFR



AFR619.1-...

4 - 5 flutes, extra long design

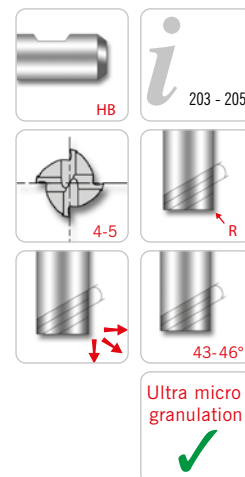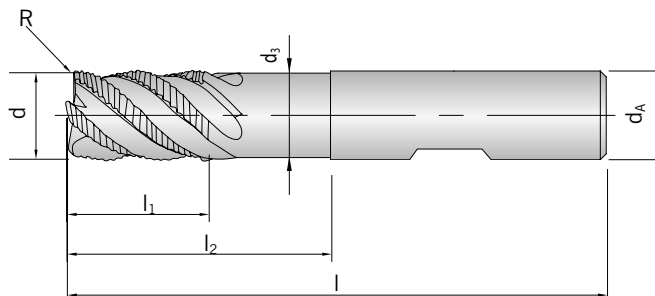

Shank DIN 6535HB	d -0,05	d _A h6	d ₃	l ₁	l ₂	l	R	z	PG 24 / Price in £ HC
									TAIN
AFR61941-060	6	6	5.5	9	18	57	0.5	4	45.46
AFR61941-080	8	8	7.5	12	24	63	0.5	4	51.38
AFR61941-100	10	10	9.5	15	30	72	0.5	4	70.16
AFR61941-120	12	12	11.5	18	36	83	0.5	4	90.78
AFR61951-160	16	16	15.5	24	48	100	1.0	5	129.03
AFR61951-200	20	20	19.2	30	60	110	1.0	5	251.29

HC = Carbide coated


P	●
M	
K	●
N	
S	○
H	

● Main application
○ Secondary application

AFR



AFR619.2-...
4 - 5 flutes, long design

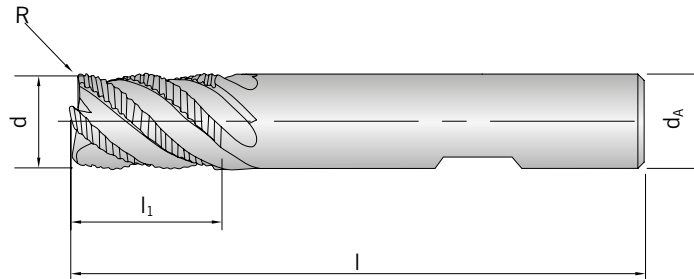

Shank DIN 6535HB	d -0,05	d _A h6	l ₁	l	R	z	PG 24 / Price in £ HC
							TiAlN
AFR61942-060	6	6	12	57	0.5	4	46.17
AFR61942-080	8	8	16	63	0.5	4	52.66
AFR61942-100	10	10	20	72	0.5	4	72.42
AFR61942-120	12	12	24	83	0.5	4	97.12
AFR61952-160	16	16	32	92	1.0	5	129.03
AFR61952-200	20	20	40	104	1.0	5	251.29

HC = Carbide coated

P	●
M	
K	●
N	
S	○
H	

● Main application
○ Secondary application



Material group	Structure of the material groups and identification letters		Brinell hardness HB	Tensile strength Rm (N/mm ²)	Chipping group	Correction factor	Cutting speed V _c (m/min)	
							VHM A/C:N	
P	Unalloyed steel	C ≤ 0.25 % annealed	125	428	P1	1,2	150 - 175 - 200	
		C > 0.25 ... ≤ 0.55 % annealed	190	639	P2	1,2	140 - 165 - 190	
		C > 0.25 ... ≤ 0.55 % hardened and tempered	210	708	P3	1,2	140 - 165 - 190	
		C > 0.55 % annealed	190	639	P4	1,2	140 - 165 - 190	
		C > 0.55 % hardened and tempered	300	1013	P5	1,0	120 - 140 - 160	
		Machining steel (short-chipping) tempered	220	745	P6	1,2	170 - 195 - 220	
	Low alloyed steel	annealed	175	591	P7	1,2	100 - 135 - 170	
		hardened and tempered	300	1013	P8	1,0	100 - 135 - 170	
		hardened and tempered	380	1282	P9	0,8	100 - 130 - 160	
		hardened and tempered	430	1477	P10	0,8	100 - 130 - 160	
	High alloyed steel and high alloyed tool steel	annealed	200	675	P11	1,2	100 - 135 - 170	
		hardened	300	1013	P12	-	-	
		hardened	400	1361	P13	0,8	80 - 115 - 150	
	Stainless steel	ferritic / martensitic, annealed	200	675	P14	-	-	
		martensitic, hardened and tempered	330	1114	P15	-	-	
M	Stainless steel	austenitic, chilled	200	675	M1	-	-	
		austenitic, precipitation-hardened (PH)	300	1013	M2	-	-	
		austenitic-ferritic, Duplex	230	778	M3	-	-	
K	Malleable cast iron	ferritic	200	675	K1	1,0	100 - 120 - 140	
		pearlitic	260	867	K2	0,8	80 - 100 - 120	
	Cast iron	low tensile strength	180	602	K3	1,0	100 - 125 - 150	
		high tensile strength / austenitic	245	825	K4	1,0	100 - 120 - 140	
	Cast iron with nodular graphite	ferritic	155	518	K5	1,0	100 - 120 - 140	
		pearlitic	265	885	K6	1,0	80 - 100 - 120	
GGV (CGI)		200	675	K7	1,0	100 - 120 - 140		
N	Aluminium alloys long chipping	not heat treatable	30	-	N1	-	-	
		heat treatable, heat treated	100	343	N2	-	-	
		≤ 12 % Si, not heat treatable	75	260	N3	-	-	
	Casted aluminium alloys	≤ 12 % Si, aushärtbar, ausgehärtet	90	314	N4	-	-	
		> 12 % Si, not heat treatable	130	447	N5	-	-	
	Magnesium alloys		70	250	N6	-	-	
	Copper and copper alloys (Brass / Bronze)	Unalloyed, elektrolyte copper	100	343	N7	-	-	
		Brass, Bronze	90	314	N8	-	-	
		Cu-alloys, short-chipping	110	382	N9	-	-	
		High-tensile, Ampco	300	1013	N10	-	-	
Non-ferrous materials	Lead alloys (without abrasive filling material)	-	-	N11	-	-		
	Duroplastic (without abrasive filling material)	-	-	N12	-	-		
	Plastic glas fibre reinforced GFRP	-	-	N13	-	-		
	Plastic carbon fibre reinforced CFRP	-	-	N14	-	-		
	Plastic aramid fibre reinforced AFRP	-	-	N15	-	-		
	Graphite (tech.)	80 Shore	-	N16	-	-		
S	High temperature resistant alloys	Fe-Basis	annealed	200	675	S1	0,7	30 - 60 - 90
			heat treated	280	943	S2	0,7	30 - 60 - 90
		Ni- or Co-alloyed	annealed	250	839	S3	0,9	30 - 50 - 70
			heat treated	350	1177	S4	0,7	30 - 55 - 80
			casting	320	1076	S5	0,7	30 - 50 - 70
	Titanium alloys	Pure titan	200	675	S6	1,0	50 - 85 - 120	
		α- and β-alloys, heat treated	375	1262	S7	1,0	40 - 75 - 110	
		β-alloys	410	1396	S8	1,0	40 - 75 - 110	
	Wolfram alloys		300	1013	S9	-	-	
	Molybdän alloys		300	1013	S10	-	-	
H	Hardened steel	hardened	50 HRC	-	H1	-	-	
		hardened	55 HRC	-	H2	-	-	
		hardened	60 HRC	-	H3	-	-	
	Hardened cast iron	hardened	55 HRC	-	H4	-	-	


The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.



Solid carbide end-mill


Feed per tooth with radial depth of cut of 50% of the cutter ($\varnothing d_1$)

$\varnothing d_1$ [mm]	Correction factor						
	1	0,7	0,8	0,9	1,1	1,2	1,5
6	0,030	0,021	0,024	0,027	0,033	0,036	0,045
8	0,050	0,035	0,040	0,045	0,055	0,060	0,075
10	0,060	0,042	0,045	0,055	0,066	0,072	0,090
12	0,070	0,049	0,056	0,063	0,077	0,084	0,105
16	0,090	0,034	0,072	0,081	0,099	0,108	0,135
20	0,120	0,084	0,090	0,108	0,132	0,144	0,180

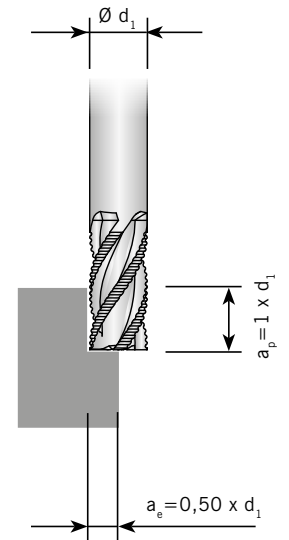

Feed per tooth when full slot milling $\rightarrow a_p = 1 \times d_1$

$\varnothing d_1$ [mm]	Correction factor						
	1	0,7	0,8	0,9	1,1	1,2	1,5
6	0,028	0,020	0,022	0,025	0,031	0,035	0,042
8	0,040	0,028	0,032	0,036	0,044	0,048	0,060
10	0,050	0,035	0,040	0,045	0,055	0,060	0,075
12	0,060	0,042	0,048	0,054	0,066	0,072	0,090
16	0,080	0,056	0,064	0,072	0,088	0,096	0,120
20	0,100	0,070	0,089	0,090	0,110	0,120	0,150

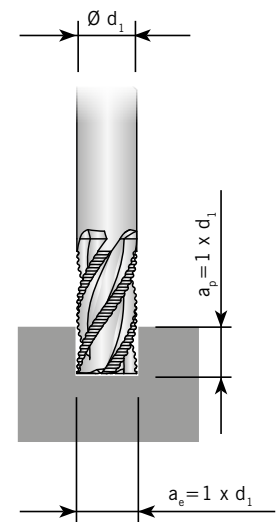

Attention:
 Take the correction factor from the table "Cutting speeds"
 Correction factor \rightarrow 1,1 with $a_p = 1 \times d_1 \rightarrow$ 1,2 with $a_p = 0,5 \times d_1$


AFR



PM-HSS end-mill


Feed per tooth with radial depth of cut of 50% of the cutter ($\varnothing d_1$)

$\varnothing d_1$ [mm]	Correction factor						
	1	0,7	0,8	0,9	1,1	1,2	1,5
6	0,022	0,015	0,018	0,020	0,024	0,026	0,033
8	0,030	0,021	0,024	0,027	0,030	0,035	0,045
10	0,039	0,027	0,030	0,035	0,042	0,047	0,060
12	0,047	0,033	0,037	0,042	0,050	0,056	0,070
16	0,066	0,046	0,052	0,060	0,070	0,080	0,100
20	0,084	0,059	0,067	0,075	0,092	0,100	0,130

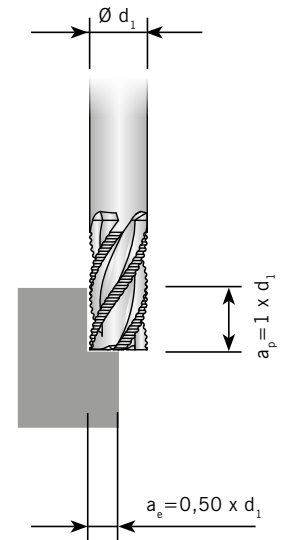

Feed per tooth when full slot milling $\rightarrow a_p = 1 \times d_1$

$\varnothing d_1$ [mm]	Correction factor						
	1	0,7	0,8	0,9	1,1	1,2	1,5
6	0,019	0,013	0,015	0,017	0,020	0,023	0,025
8	0,026	0,018	0,020	0,023	0,028	0,031	0,040
10	0,034	0,029	0,028	0,030	0,037	0,041	0,050
12	0,041	0,029	0,033	0,037	0,045	0,049	0,060
16	0,057	0,040	0,046	0,050	0,063	0,070	0,080
20	0,073	0,050	0,060	0,065	0,080	0,090	0,110

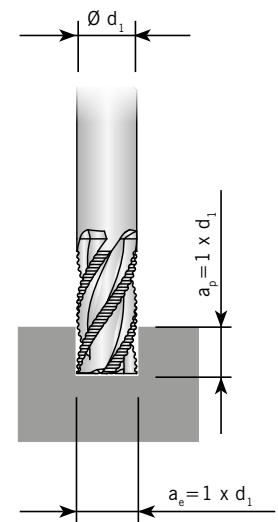


Attention:
 Take the correction factor from the table "Cutting speeds"
 Correction factor \rightarrow 1,1 with $a_p = 1 \times d_1 \rightarrow$ 1,2 with $a_p = 0,5 \times d_1$

AFR

For more information see

www.arno.de

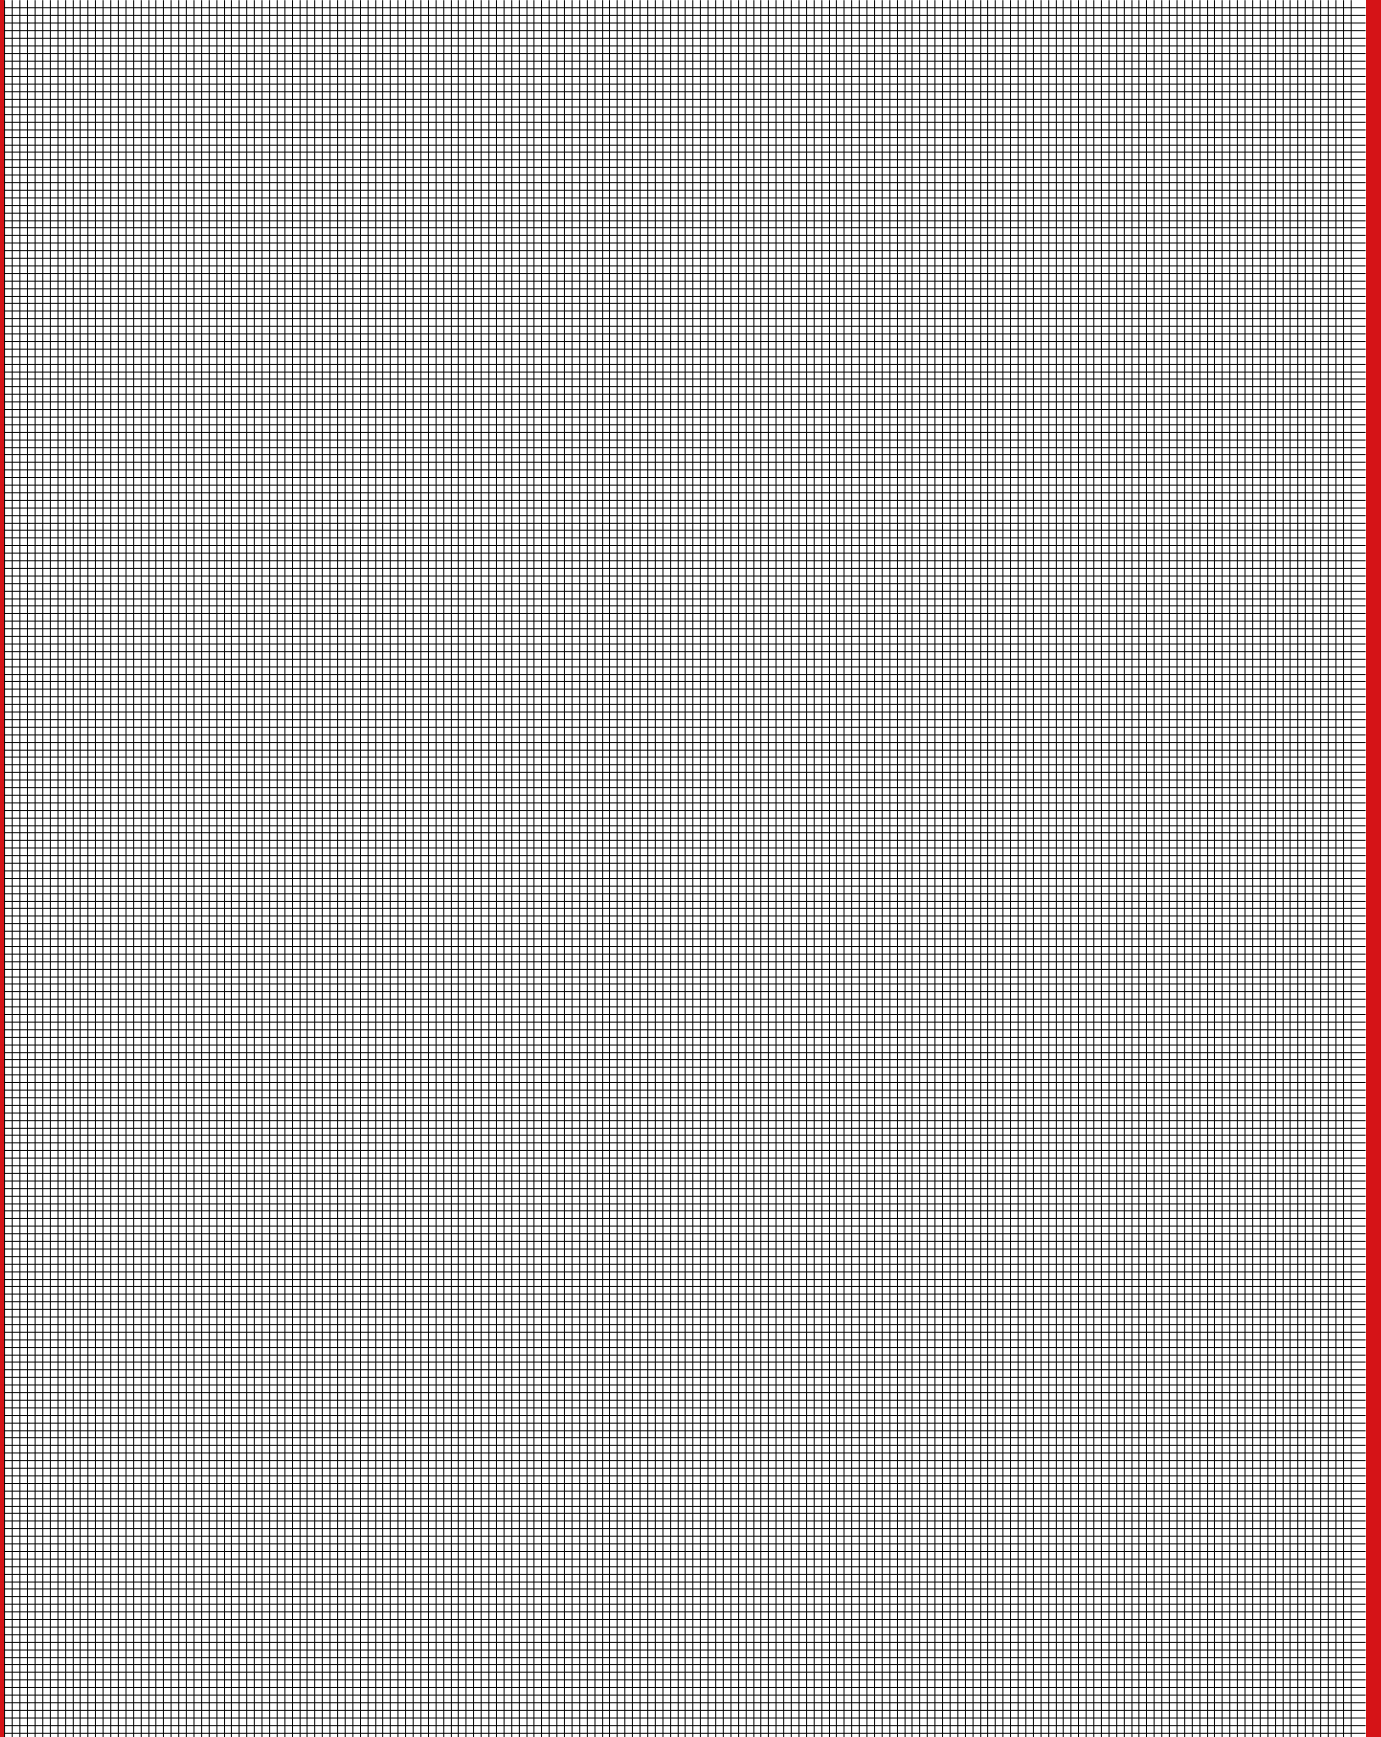


GENERAL PURPOSE HIGH PERFORMANCE FOR ROUGHING AND FINISHING.

Solid carbide cutters with uneven pitch design (35°-38°)
for both roughing and finishing of nearly all materials
with up to 60% higher feed rate, less vibration,
better surface finish and increased cutting
depth.





AFV61840-...
4 flutes, short design

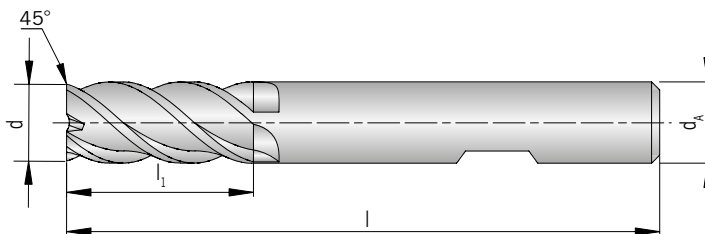

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	Chamfer	PG 24 / Price in £ HC
						TiAlN
AFV61840-030	3	6	7	54	0,1 x 45°	14.44
AFV61840-040	4	6	8	54	0,15 x 45°	14.44
AFV61840-050	5	6	10	54	0,15 x 45°	14.44
AFV61840-060	6	6	10	54	0,2 x 45°	14.44
AFV61840-080	8	8	12	58	0,2 x 45°	20.81
AFV61840-100	10	10	14	66	0,3 x 45°	29.52
AFV61840-120	12	12	16	73	0,35 x 45°	38.81
AFV61840-140	14	14	18	75	0,4 x 45°	48.28
AFV61840-160	16	16	22	82	0,4 x 45°	62.96
AFV61840-180	18	18	24	84	0,5 x 45°	92.78
AFV61840-200	20	20	26	92	0,5 x 45°	97.02


HC = Carbide coated

P	○
M	●
K	○
N	○
S	○
H	○

● Main application
○ Secondary application



AFV61840-...
4 flutes, short design

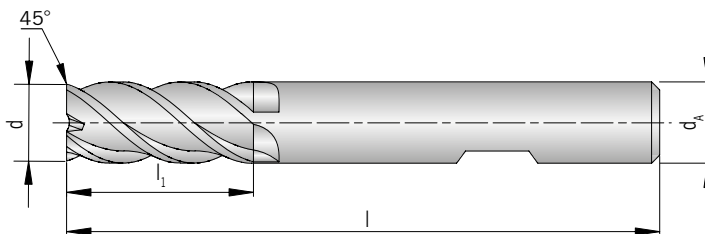

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	Chamfer	PG 24 / Price in £ HC
						£100
AFV61840-030	3	6	7	54	0,1 x 45°	14.79
AFV61840-040	4	6	8	54	0,15 x 45°	14.79
AFV61840-050	5	6	10	54	0,15 x 45°	14.79
AFV61840-060	6	6	10	54	0,2 x 45°	14.79
AFV61840-080	8	8	12	58	0,2 x 45°	21.00
AFV61840-100	10	10	14	66	0,3 x 45°	29.54
AFV61840-120	12	12	16	73	0,35 x 45°	41.81
AFV61840-140	14	14	18	75	0,4 x 45°	51.92
AFV61840-160	16	16	22	82	0,4 x 45°	67.08
AFV61840-180	18	18	24	84	0,5 x 45°	92.35
AFV61840-200	20	20	26	92	0,5 x 45°	108.46

HC = Carbide coated



P	●
M	●
K	●
N	●
S	●
H	○

● Main application
○ Secondary application



AFV61840-...R...

4 flutes, short design, with corner radius

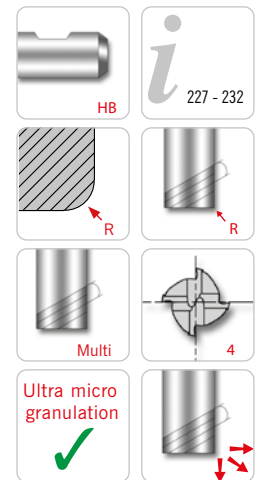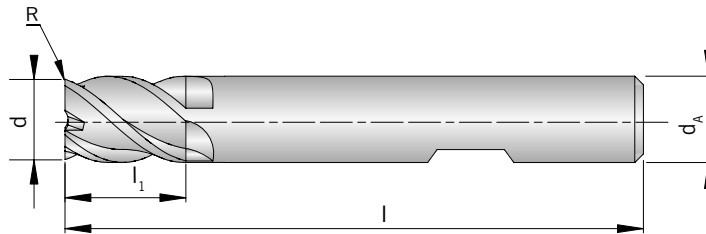

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	R	PG 24 / Price in £ HC
						100
AFV61840-030R0,3	3	6	7	54	0.3	17.81
AFV61840-030R0,5	3	6	7	54	0.5	17.81
AFV61840-040R0,3	4	6	8	54	0.3	17.81
AFV61840-040R0,5	4	6	8	54	0.5	17.81
AFV61840-050R0,3	5	6	10	54	0.3	17.81
AFV61840-050R0,5	5	6	10	54	0.5	17.81
AFV61840-060R0,3	6	6	10	54	0.3	17.81
AFV61840-060R0,5	6	6	10	54	0.5	17.81
AFV61840-060R1,0	6	6	10	54	1.0	17.81
AFV61840-080R0,5	8	8	12	58	0.5	24.37
AFV61840-080R1,0	8	8	12	58	1.0	24.37
AFV61840-100R0,5	10	10	14	66	0.5	34.00
AFV61840-100R1,0	10	10	14	66	1.0	34.00
AFV61840-120R0,5	12	12	16	73	0.5	48.31
AFV61840-120R1,0	12	12	16	73	1.0	48.31
AFV61840-120R2,0	12	12	16	73	2.0	48.31
AFV61840-140R0,5	14	14	18	75	0.5	59.68
AFV61840-160R1,0	16	16	22	82	1.0	77.13
AFV61840-160R2,0	16	16	22	82	2.0	77.13
AFV61840-160R3,0	16	16	22	82	3.0	77.13
AFV61840-180R1,0	18	18	24	84	1.0	107.03
AFV61840-200R1,0	20	20	26	92	1.0	125.93
AFV61840-200R2,0	20	20	26	92	2.0	125.93
AFV61840-200R3,0	20	20	26	92	3.0	125.93

HC = Carbide coated


P	●
M	●
K	●
N	○
S	●
H	○

● Main application
○ Secondary application

AFV



AFV62342-...
4 flutes, short design

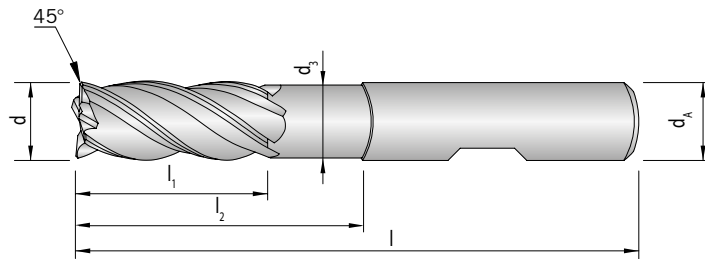

with extended neck

Shank DIN 6535HB	d -0,03	d _A h6	d _s	l ₁	l ₂	l	Chamfer	PG 24 / Price in £ HC
								£100
AFV62342-030A	3	6	2.7	7	12	54	0,1 x 45°	16.00
AFV62342-030B	3	6	2.7	7	17	57	0,1 x 45°	16.00
AFV62342-030C	3	6	2.7	8	14	57	0,1 x 45°	16.00
AFV62342-040A	4	6	3.7	8	15	57	0,15 x 45°	16.00
AFV62342-040B	4	6	3.7	8	22	63	0,15 x 45°	16.00
AFV62342-040C	4	6	3.7	11	16	57	0,15 x 45°	16.00
AFV62342-050A	5	6	4.7	10	17	57	0,15 x 45°	16.00
AFV62342-050B	5	6	4.7	10	27	67	0,15 x 45°	16.00
AFV62342-050C	5	6	4.7	13	18	57	0,15 x 45°	16.00
AFV62342-060A	6	6	5.5	10	15	57	0,2 x 45°	16.00
AFV62342-060B	6	6	5.5	10	20	62	0,2 x 45°	16.00
AFV62342-060C	6	6	5.5	10	32	74	0,2 x 45°	16.00
AFV62342-060D	6	6	5.5	13	21	57	0,2 x 45°	16.00
AFV62342-080A	8	8	7.5	12	20	63	0,2 x 45°	24.79
AFV62342-080B	8	8	7.5	12	30	73	0,2 x 45°	27.45
AFV62342-080C	8	8	7.5	19	27	63	0,2 x 45°	27.45
AFV62342-080D	8	8	7.5	12	46	90	0,2 x 45°	29.84
AFV62342-100A	10	10	9.2	14	25	72	0,3 x 45°	33.33
AFV62342-100B	10	10	9.2	14	35	82	0,3 x 45°	38.21
AFV62342-100C	10	10	9.2	22	32	72	0,3 x 45°	38.21
AFV62342-100D	10	10	9.2	14	55	102	0,3 x 45°	40.12
AFV62342-120A	12	12	11.0	16	30	83	0,35 x 45°	60.65
AFV62342-120B	12	12	11.0	16	40	93	0,35 x 45°	63.35
AFV62342-120C	12	12	11.0	26	38	83	0,35 x 45°	63.35
AFV62342-120D	12	12	11.0	16	64	117	0,35 x 45°	81.88
AFV62342-160A	16	16	15.0	22	38	92	0,4 x 45°	83.32
AFV62342-160B	16	16	15.0	32	44	92	0,4 x 45°	91.69
AFV62342-160C	16	16	15.0	22	55	109	0,4 x 45°	107.14

AFV



with extended neck

Shank DIN 6535HB	d -0,03	d _A h6	d ₃	l ₁	l ₂	l	Chamfer	PG 24 / Price in £ HC
								£100
AFV62342-160D	16	16	15.0	22	87	141	0,4 x 45°	115.03
AFV62342-200A	20	20	19.0	26	50	104	0,5 x 45°	118.58
AFV62342-200B	20	20	19.0	38	54	104	0,5 x 45°	136.56
AFV62342-200C	20	20	19.0	26	70	124	0,5 x 45°	153.11
AFV62342-200D	20	20	19.0	26	110	164	0,5 x 45°	179.53

HC = Carbide coated



P	●
M	●
K	●
N	
S	●
H	

● Main application
○ Secondary application



AFV62342-...R...

4 flutes, short design, with corner radius

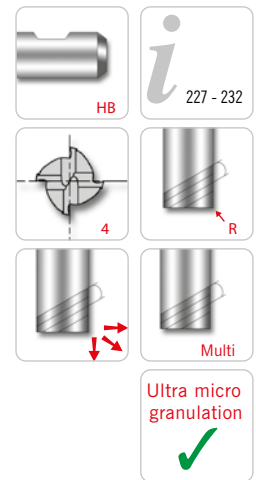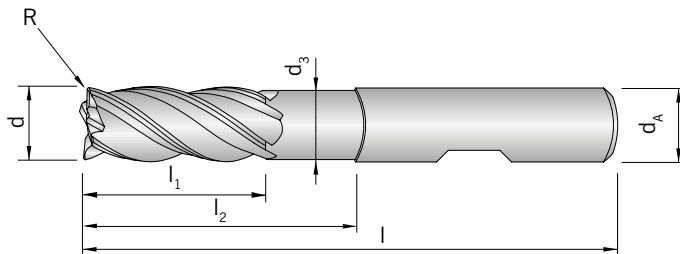

with extended neck

Shank DIN 6535HB	d -0,03	d _A h6	d ₃	l ₁	l ₂	l	R	PG 24 / Price in £ HC
								100\$
AFV62342-030AR0,3	3	6	2.7	7	12	54	0.3	18.41
AFV62342-030AR0,5	3	6	2.7	7	12	54	0.5	18.41
AFV62342-030BR0,3	3	6	2.7	7	17	57	0.3	18.41
AFV62342-030BR0,5	3	6	2.7	7	17	57	0.5	18.41
AFV62342-040AR0,3	4	6	3.7	8	15	57	0.3	18.41
AFV62342-040AR0,5	4	6	3.7	8	15	57	0.5	18.41
AFV62342-040BR0,3	4	6	3.7	8	22	63	0.3	18.41
AFV62342-040BR0,5	4	6	3.7	8	22	63	0.5	18.41
AFV62342-050AR0,3	5	6	4.7	10	17	57	0.3	18.41
AFV62342-050AR0,5	5	6	4.7	10	17	57	0.5	18.41
AFV62342-050BR0,3	5	6	4.7	10	27	67	0.3	18.41
AFV62342-050BR0,5	5	6	4.7	10	27	67	0.5	18.41
AFV62342-060AR0,3	6	6	5.5	10	15	57	0.3	18.41
AFV62342-060AR0,5	6	6	5.5	10	15	57	0.5	18.41
AFV62342-060AR1,0	6	6	5.5	10	15	57	1.0	18.41
AFV62342-060BR0,3	6	6	5.5	10	20	62	0.3	18.41
AFV62342-060BR0,5	6	6	5.5	10	20	62	0.5	18.41
AFV62342-060BR1,0	6	6	5.5	10	20	62	1.0	18.41
AFV62342-060CR0,3	6	6	5.5	10	32	74	0.3	18.41
AFV62342-060CR0,5	6	6	5.5	10	32	74	0.5	18.41
AFV62342-060CR1,0	6	6	5.5	10	32	74	1.0	18.41
AFV62342-080AR0,5	8	8	7.5	12	20	63	0.5	28.21
AFV62342-080AR1,0	8	8	7.5	12	20	63	1.0	28.21
AFV62342-080BR0,5	8	8	7.5	12	30	73	0.5	31.16
AFV62342-080BR1,0	8	8	7.5	12	30	73	1.0	31.16
AFV62342-080CR0,5	8	8	7.5	12	46	90	0.5	33.57
AFV62342-080CR1,0	8	8	7.5	12	46	90	1.0	33.57
AFV62342-100AR0,5	10	10	9.2	14	25	72	0.5	37.60
AFV62342-100AR1,0	10	10	9.2	14	25	72	1.0	37.60
AFV62342-100BR0,5	10	10	9.2	14	35	82	0.5	42.79
AFV62342-100BR1,0	10	10	9.2	14	35	82	1.0	42.79
AFV62342-100CR0,5	10	10	9.2	14	55	102	0.5	45.07
AFV62342-100CR1,0	10	10	9.2	14	55	102	1.0	45.07
AFV62342-120AR0,5	12	12	11.0	16	30	83	0.5	67.33
AFV62342-120AR1,0	12	12	11.0	16	30	83	1.0	67.33



with extended neck

Shank DIN 6535HB	d -0,03	d _A h6	d ₃	l ₁	l ₂	l	R	PG 24 / Price in £ HC
								£100
AFV62342-120AR2,0	12	12	11.0	16	30	83	2.0	67.33
AFV62342-120BR0,5	12	12	11.0	16	40	93	0.5	70.58
AFV62342-120BR1,0	12	12	11.0	16	40	93	1.0	70.58
AFV62342-120BR2,0	12	12	11.0	16	40	93	2.0	70.58
AFV62342-120CR0,5	12	12	11.0	16	64	117	0.5	90.18
AFV62342-120CR1,0	12	12	11.0	16	64	117	1.0	90.18
AFV62342-120CR2,0	12	12	11.0	16	64	117	2.0	90.18
AFV62342-160AR1,0	16	16	15.0	22	38	92	1.0	91.02
AFV62342-160AR2,0	16	16	15.0	22	38	92	2.0	91.02
AFV62342-160AR3,0	16	16	15.0	22	38	92	3.0	91.02
AFV62342-160BR1,0	16	16	15.0	22	55	109	1.0	115.51
AFV62342-160BR2,0	16	16	15.0	22	55	109	2.0	115.51
AFV62342-160BR3,0	16	16	15.0	22	55	109	3.0	115.51
AFV62342-160CR1,0	16	16	15.0	22	87	141	1.0	124.67
AFV62342-160CR2,0	16	16	15.0	22	87	141	2.0	124.67
AFV62342-160CR3,0	16	16	15.0	22	87	141	3.0	124.67
AFV62342-200AR1,0	20	20	19.0	26	50	104	1.0	128.98
AFV62342-200AR2,0	20	20	19.0	26	50	104	2.0	82.38
AFV62342-200AR3,0	20	20	19.0	26	50	104	3.0	128.98
AFV62342-200BR1,0	20	20	19.0	26	70	124	1.0	164.31
AFV62342-200BR2,0	20	20	19.0	26	70	124	2.0	164.31
AFV62342-200BR3,0	20	20	19.0	26	70	124	3.0	164.31
AFV62342-200CR1,0	20	20	19.0	26	110	164	1.0	190.72
AFV62342-200CR2,0	20	20	19.0	26	110	164	2.0	190.72
AFV62342-200CR3,0	20	20	19.0	26	110	164	3.0	190.72


HC = Carbide coated

P	●
M	●
K	●
N	○
S	●
H	○

● Main application
○ Secondary application



AFV61841-...
4 flutes, long design

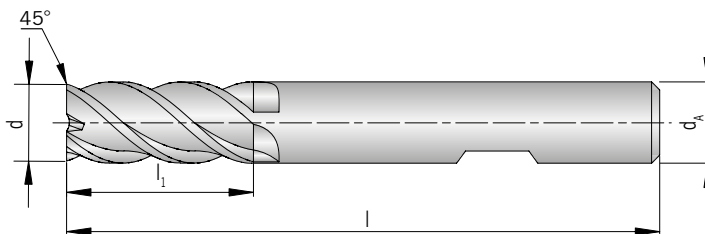

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	Chamfer	PG 24 / Price in £ HC
						£100
AFV61841-030	3	6	8	57	0,1 x 45°	16.73
AFV61841-040	4	6	11	57	0,15 x 45°	16.73
AFV61841-050	5	6	13	57	0,15 x 45°	16.73
AFV61841-060	6	6	13	57	0,2 x 45°	16.73
AFV61841-080	8	8	19	63	0,2 x 45°	23.70
AFV61841-100	10	10	22	72	0,3 x 45°	35.01
AFV61841-120	12	12	26	83	0,35 x 45°	48.31
AFV61841-140	14	14	26	83	0,4 x 45°	68.76
AFV61841-160	16	16	32	92	0,4 x 45°	79.60
AFV61841-180	18	18	32	92	0,5 x 45°	110.88
AFV61841-200	20	20	38	104	0,5 x 45°	133.56
AFV61841-250	25	25	38	104	0,5 x 45°	174.48

HC = Carbide coated


P	●
M	●
K	●
N	●
S	●
H	○

● Main application
○ Secondary application

AFV



AFV61841-...
4 flutes, long design

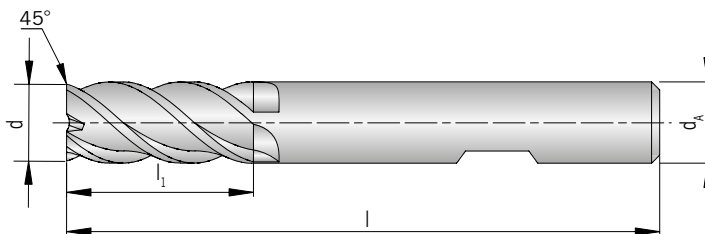

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	Chamfer	PG 24 / Price in £ HC
						TAIN
AFV61841-030	3	6	8	57	0,1 x 45°	16.36
AFV61841-040	4	6	11	57	0,15 x 45°	16.36
AFV61841-050	5	6	13	57	0,15 x 45°	16.36
AFV61841-060	6	6	13	57	0,2 x 45°	16.36
AFV61841-080	8	8	19	63	0,2 x 45°	23.15
AFV61841-100	10	10	22	72	0,3 x 45°	34.18
AFV61841-120	12	12	26	83	0,35 x 45°	44.12
AFV61841-140	14	14	26	83	0,4 x 45°	59.05
AFV61841-160	16	16	32	92	0,4 x 45°	76.94
AFV61841-180	18	18	32	92	0,5 x 45°	107.50
AFV61841-200	20	20	38	104	0,5 x 45°	118.78
AFV61841-250	25	25	38	104	0,5 x 45°	167.16

HC = Carbide coated



P	<input type="radio"/>
M	<input checked="" type="radio"/>
K	<input type="radio"/>
N	<input type="radio"/>
S	<input type="radio"/>
H	<input type="radio"/>

● Main application
○ Secondary application



AFV61841-...R...

4 flutes, long design

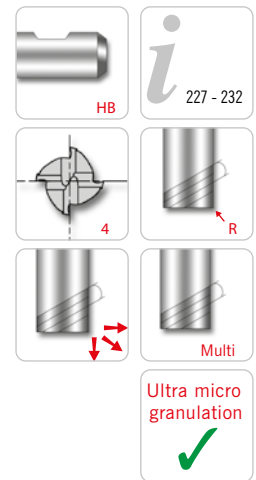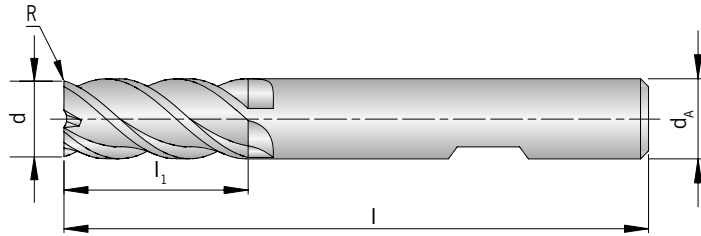

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	R	PG 24 / Price in £ HC
						£100
AFV61841-030R0,3	3	6	8	57	0.3	20.35
AFV61841-030R0,5	3	6	8	57	0.5	20.35
AFV61841-040R0,3	4	6	11	57	0.3	20.35
AFV61841-040R0,5	4	6	11	57	0.5	20.35
AFV61841-050R0,3	5	6	13	57	0.3	20.35
AFV61841-050R0,5	5	6	13	57	0.5	20.35
AFV61841-060R0,3	6	6	13	57	0.3	20.35
AFV61841-060R0,5	6	6	13	57	0.5	20.35
AFV61841-060R1,0	6	6	13	57	1.0	20.35
AFV61841-080R0,5	8	8	19	63	0.5	27.50
AFV61841-080R1,0	8	8	19	63	1.0	27.50
AFV61841-100R0,5	10	10	22	72	0.5	40.97
AFV61841-100R1,0	10	10	22	72	1.0	40.97
AFV61841-120R0,5	12	12	26	83	0.5	55.53
AFV61841-120R1,0	12	12	26	83	1.0	55.52
AFV61841-120R2,0	12	12	26	83	2.0	55.52
AFV61841-140R0,5	14	14	26	83	0.5	79.05
AFV61841-160R1,0	16	16	32	92	1.0	92.64
AFV61841-160R2,0	16	16	32	92	2.0	92.76
AFV61841-160R3,0	16	16	32	92	3.0	92.76
AFV61841-180R1,0	18	18	32	92	1.0	131.16
AFV61841-200R1,0	20	20	38	104	1.0	153.42
AFV61841-200R2,0	20	20	38	104	2.0	153.42
AFV61841-200R3,0	20	20	38	104	3.0	153.42
AFV61841-250R1,0	25	25	38	104	1.0	200.64

HC = Carbide coated



P	●
M	●
K	●
N	●
S	●
H	○

● Main application
○ Secondary application



AFV61841-...R...

4 flutes, long design

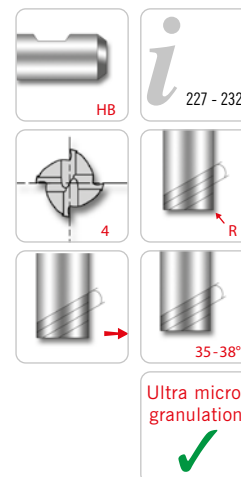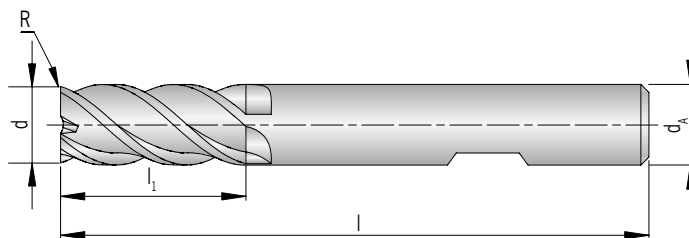

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	R ± 0,03	PG 24 / Price in £ HC
						TiAlN
AFV61841-100R1,5	10	10	22	72	1.5	42.88
AFV61841-100R3,0	10	10	22	72	3.0	45.79
AFV61841-160R1,5	16	16	32	92	1.5	93.86
AFV61841-160R2,0	16	16	32	92	2.0	100.02
AFV61841-160R3,0	16	16	32	92	3.0	100.02
AFV61841-200R2,0	20	20	38	104	2.0	144.26
AFV61841-200R3,0	20	20	38	104	3.0	153.52
AFV61841-250R3,0	25	25	38	104	3.0	209.92

HC = Carbide coated


P	○
M	●
K	○
N	○
S	○
H	○

● Main application
○ Secondary application



AFV60341-...

4 flutes, long design

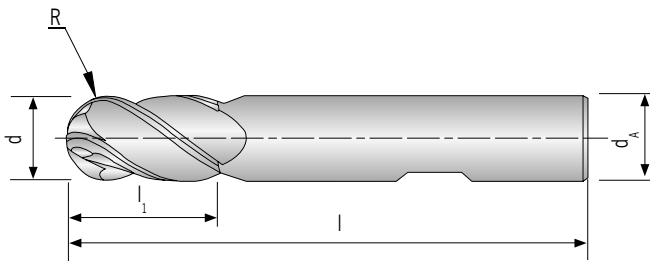

HB

i

227 - 232

35-38°

4

Ultra micro granulation

✓

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	R ± 0,01	PG 24 / Price in £ HC
						TAIN
AFV60341-030	3	6	8	57	1.5	18.64
AFV60341-040	4	6	11	57	2.0	18.64
AFV60341-050	5	6	13	57	2.5	18.64
AFV60341-060	6	6	13	57	3.0	18.64
AFV60341-080	8	8	19	63	4.0	25.91
AFV60341-100	10	10	22	72	5.0	38.50
AFV60341-120	12	12	26	83	6.0	48.56
AFV60341-160	16	16	32	92	8.0	85.41
AFV60341-200	20	20	38	104	10.0	131.50
AFV60341-250	25	25	38	104	12.5	183.14

HC = Carbide coated

P	○
M	●
K	○
N	
S	○
H	



● Main application
○ Secondary application

AFV



AFV61646-...

4 flutes, long design

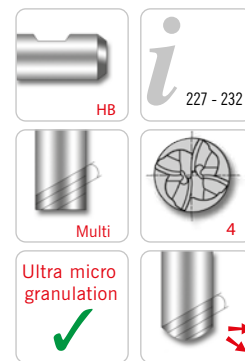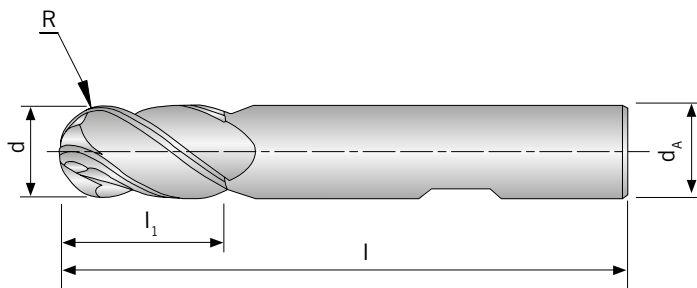

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	R ± 0,02	PG 24 / Price in £ HC
						100
AFV61646-030	3	6	8	57	1.5	20.38
AFV61646-040	4	6	11	57	2.0	20.38
AFV61646-050	5	6	13	57	2.5	20.38
AFV61646-060	6	6	13	57	3.0	20.38
AFV61646-080	8	8	19	63	4.0	27.27
AFV61646-100	10	10	22	72	5.0	40.90
AFV61646-120	12	12	26	83	6.0	55.54
AFV61646-160	16	16	32	92	8.0	93.82
AFV61646-200	20	20	38	104	10.0	164.17
AFV61646-250	25	25	38	104	12.5	231.60


HC = Carbide coated

P	●
M	●
K	●
N	○
S	●
H	○

● Main application
○ Secondary application



AFV61851-...
5 flutes, long design

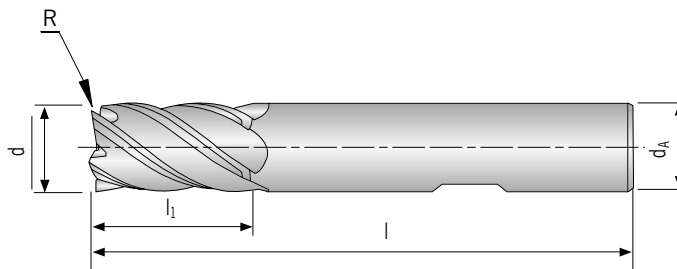

HB

227 - 232

5

45°

35-38°

Ultra micro granulation

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	Chamfer	PG 24 / Price in £ HC
						TiAlN
AFV61851-060	6	6	13	57	0,1 x 45°	19.81
AFV61851-080	8	8	19	63	0,1 x 45°	27.28
AFV61851-100	10	10	22	72	0,1 x 45°	40.60
AFV61851-120	12	12	26	83	0,1 x 45°	50.79
AFV61851-140	14	14	26	83	0,2 x 45°	68.44
AFV61851-160	16	16	32	92	0,2 x 45°	89.60
AFV61851-180	18	18	32	92	0,2 x 45°	126.87
AFV61851-200	20	20	38	104	0,2 x 45°	137.92
AFV61851-250	25	25	38	104	0,2 x 45°	191.10

HC = Carbide coated



P	○
M	●
K	○
N	○
S	○
H	○

● Main application
○ Secondary application





AFV60266-...
6 flutes, long design

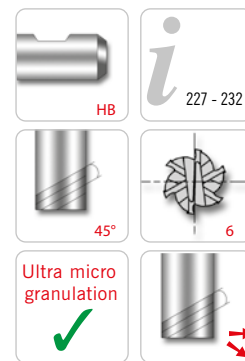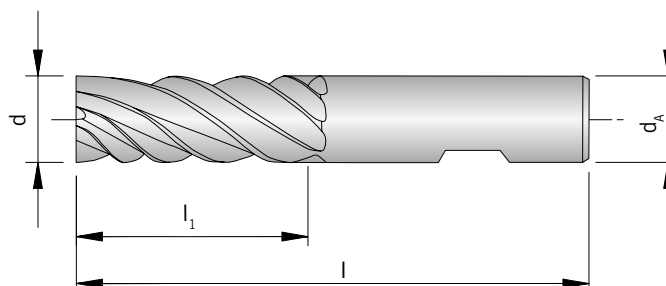

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					£100
AFV60266-060	6	6	13	57	20.38
AFV60266-080	8	8	19	63	27.27
AFV60266-100	10	10	22	72	40.90
AFV60266-120	12	12	26	83	55.54
AFV60266-160	16	16	32	92	96.74
AFV60266-200	20	20	38	104	174.44
AFV60266-250	25	25	44	104	241.86

HC = Carbide coated


P	●
M	●
K	●
N	●
S	●
H	○

● Main application
○ Secondary application



AFV60262-...

6 flutes, extra long design

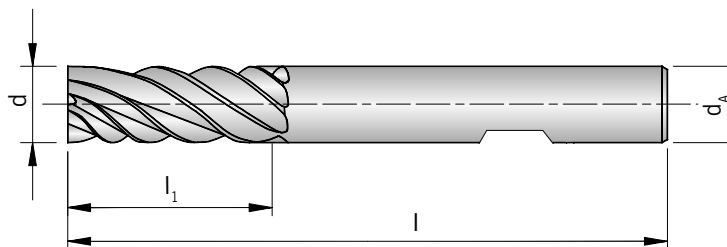

HB

227 - 232

45°

6

Ultra micro granulation

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					£100
AFV60262-060	6	6	24	75	24.92
AFV60262-080	8	8	32	75	35.47
AFV60262-100	10	10	40	100	56.57
AFV60262-120	12	12	48	120	79.89
AFV60262-160	16	16	64	140	155.38
AFV60262-200	20	20	80	150	281.43
AFV60262-250	25	25	100	170	417.75

HC = Carbide coated

P	●
M	●
K	●
N	●
S	●
H	○


● Main application
○ Secondary application





AFV60861-...R...

6 flutes, long design, with corner radius

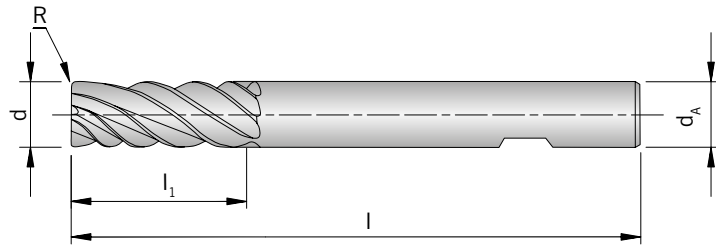

HB

227 - 232

6

R

45°

Ultra micro granulation

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	R	PG 24 / Price in £ HC
						£100
AFV60861-060R0,5	6	6	13	57	0.5	22.72
AFV60861-060R1,0	6	6	13	57	1.0	22.72
AFV60861-080R0,5	8	8	19	63	0.5	30.49
AFV60861-080R1,0	8	8	19	63	1.0	30.49
AFV60861-100R0,5	10	10	22	72	0.5	45.74
AFV60861-100R1,0	10	10	22	72	1.0	45.74
AFV60861-100R1,5	10	10	22	72	1.5	45.74
AFV60861-100R2,0	10	10	22	72	2.0	45.74
AFV60861-120R0,5	12	12	26	83	0.5	62.30
AFV60861-120R1,0	12	12	26	83	1.0	62.30
AFV60861-120R1,5	12	12	26	83	1.5	62.30
AFV60861-120R2,0	12	12	26	83	2.0	62.30
AFV60861-120R3,0	12	12	26	83	3.0	62.30
AFV60861-160R1,0	16	16	32	92	1.0	109.10
AFV60861-160R1,5	16	16	32	92	1.5	108.33
AFV60861-160R2,0	16	16	32	92	2.0	108.33
AFV60861-160R3,0	16	16	32	92	3.0	108.33
AFV60861-200R1,0	20	20	38	104	1.0	196.41
AFV60861-200R1,5	20	20	38	104	1.5	196.41
AFV60861-200R2,0	20	20	38	104	2.0	196.41
AFV60861-200R3,0	20	20	38	104	3.0	196.41
AFV60861-250R1,0	25	25	44	104	1.0	272.64
AFV60861-250R1,5	25	25	44	104	1.5	272.64
AFV60861-250R2,0	25	25	44	104	2.0	272.64
AFV60861-250R3,0	25	25	44	104	3.0	272.64

HC = Carbide coated

P	●
M	●
K	●
N	●
S	●
H	○



● Main application
○ Secondary application

AFV



AFV60862-...R...

6 flutes, extra long design, with corner radius

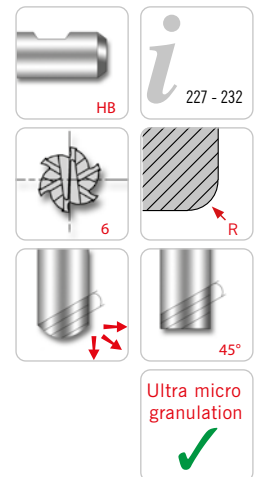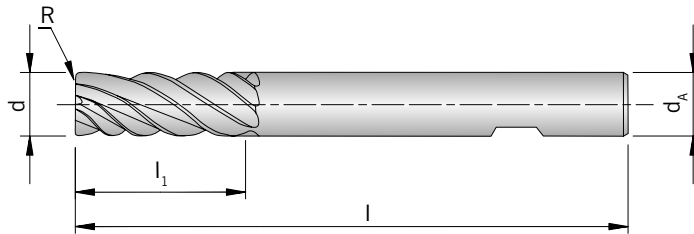

Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	R	PG 24 / Price in £ HC
						£100
AFV60862-060R0,5	6	6	24	75	0.5	28.59
AFV60862-060R1,0	6	6	24	75	1.0	28.59
AFV60862-080R0,5	8	8	32	75	0.5	40.75
AFV60862-080R1,0	8	8	32	75	1.0	40.75
AFV60862-080R2,0	8	8	32	75	2.0	40.75
AFV60862-100R0,5	10	10	40	100	0.5	65.08
AFV60862-100R1,0	10	10	40	100	1.0	65.08
AFV60862-100R1,5	10	10	40	100	1.5	65.08
AFV60862-100R2,0	10	10	40	100	2.0	65.08
AFV60862-120R0,5	12	12	48	120	0.5	91.91
AFV60862-120R1,0	12	12	48	120	1.0	91.91
AFV60862-120R1,5	12	12	48	120	1.5	91.91
AFV60862-120R2,0	12	12	48	120	2.0	91.91
AFV60862-120R3,0	12	12	48	120	3.0	91.91
AFV60862-160R1,0	16	16	64	140	1.0	178.83
AFV60862-160R1,5	16	16	64	140	1.5	178.83
AFV60862-160R2,0	16	16	64	140	2.0	178.83
AFV60862-160R3,0	16	16	64	140	3.0	178.83
AFV60862-200R1,0	20	20	80	150	1.0	323.95
AFV60862-200R1,5	20	20	80	150	1.5	323.95
AFV60862-200R2,0	20	20	80	150	2.0	323.95
AFV60862-200R3,0	20	20	80	150	3.0	323.95
AFV60862-200R4,0	20	20	80	150	4.0	323.95
AFV60862-200R5,0	20	20	80	150	5.0	323.95
AFV60862-250R1,0	25	25	100	170	1.0	476.38
AFV60862-250R1,5	25	25	100	170	1.5	476.38

AFV



Shank DIN 6535HB	d -0,03	d _A h6	l ₁	l	R	PG 24 / Price in £ HC
						£100
AFV60862-250R2,0	25	25	100	170	2.0	476.38
AFV60862-250R3,0	25	25	100	170	3.0	476.38
AFV60862-250R4,0	25	25	100	170	4.0	476.38
AFV60862-250R5,0	25	25	100	170	5.0	476.38

HC = Carbide coated

P	●
M	●
K	●
N	
S	●
H	

- Main application
- Secondary application




Material group	Structure of the material groups and identification letters		Brinell hardness HB	Tensile strength Rm (N/mm ²)	Chipping group	Correction factor	Cutting speed V _c (m/min)		
							VHM S100	VHM TIALN	
P	Unalloyed steel	C ≤ 0.25 % annealed	125	428	P1	1,2	110 - 185 - 260	100 - 170 - 240	
		C > 0.25 ... ≤ 0.55 % annealed	190	639	P2	1,2	110 - 185 - 260	100 - 170 - 240	
		C > 0.25 ... ≤ 0.55 % hardened and tempered	210	708	P3	1,2	100 - 180 - 260	90 - 155 - 220	
		C > 0.55 % annealed	190	639	P4	1,2	110 - 185 - 260	100 - 170 - 240	
		C > 0.55 % hardened and tempered	300	1013	P5	1,0	65 - 108 - 150	60 - 100 - 140	
		Machining steel (short-chipping) tempered	220	745	P6	1,2	110 - 185 - 260	100 - 170 - 240	
	Low alloyed steel	annealed	175	591	P7	1,2	100 - 160 - 220	90 - 145 - 200	
		hardened and tempered	300	1013	P8	1,0	100 - 160 - 220	90 - 145 - 200	
		hardened and tempered	380	1282	P9	0,8	65 - 98 - 130	60 - 90 - 120	
		hardened and tempered	430	1477	P10	0,8	65 - 98 - 130	60 - 90 - 120	
	High alloyed steel and high alloyed tool steel	annealed	200	675	P11	1,2	100 - 160 - 220	90 - 145 - 200	
		hardened	300	1013	P12	1,0	90 - 120 - 150	80 - 110 - 140	
		hardened	400	1361	P13	0,8	65 - 93 - 120	60 - 85 - 110	
	Stainless steel	ferritic / martensitic, annealed	200	675	P14	1,0	55 - 93 - 120	50 - 85 - 120	
		martensitic, hardened and tempered	330	1114	P15	0,9	35 - 63 - 90	30 - 55 - 80	
M	Stainless steel	austenitic, chilled	200	675	M1	1,0	65 - 98 - 130	60 - 90 - 120	
		austenitic, precipitation-hardened (PH)	300	1013	M2	0,9	35 - 63 - 90	30 - 55 - 80	
		austenitic-ferritic, Duplex	230	778	M3	1,0	55 - 93 - 130	50 - 85 - 120	
K	Malleable cast iron	ferritic	200	675	K1	1,0	90 - 135 - 180	80 - 120 - 160	
		pearlitic	260	867	K2	0,8	80 - 125 - 170	70 - 110 - 150	
	Cast iron	low tensile strength	180	602	K3	1,0	90 - 135 - 180	80 - 120 - 160	
		high tensile strength / austenitic	245	825	K4	1,0	80 - 135 - 190	70 - 110 - 150	
	Cast iron with nodular graphite	ferritic	155	518	K5	1,0	90 - 145 - 200	80 - 120 - 160	
		pearlitic	265	885	K6	1,0	80 - 125 - 170	70 - 110 - 150	
GGV (CGI)		200	675	K7	1,0	90 - 145 - 200	80 - 120 - 160		
N	Aluminium alloys long chipping	not heat treatable	30	-	N1		-	-	
		heat treatable, heat treated	100	343	N2		-	-	
	Casted aluminium alloys	≤ 12 % Si, not heat treatable	75	260	N3		-	-	
		≤ 12 % Si, aushärtbar, ausgehärtet	90	314	N4		-	-	
		> 12 % Si, not heat treatable	130	447	N5		-	-	
	Magnesium alloys		70	250	N6		-	-	
	Copper and copper alloys (Brass / Bronze)	Unalloyed, elektrolyte copper	100	343	N7		-	-	
		Brass, Bronze	90	314	N8		-	-	
		Cu-alloys, short-chipping	110	382	N9		-	-	
		High-tensile, Ampco	300	1013	N10		-	-	
	Non-ferrous materials	Lead alloys (without abrasive filling material)	-	-	N11		-	-	
		Duroplastic (without abrasive filling material)	-	-	N12		-	-	
		Plastic glas fibre reinforced GFRP	-	-	N13		-	-	
		Plastic carbon fibre reinforced CFRP	-	-	N14		-	-	
		Plastic aramid fibre reinforced AFRP	-	-	N15		-	-	
		Graphite (tech.)	80 Shore	-	N16		-	-	
S	High temperature resistant alloys	Fe-Basis	annealed	200	675	S1	0,7	30 - 60 - 90	30 - 60 - 90
			heat treated	280	943	S2	0,7	30 - 60 - 90	30 - 60 - 90
		Ni- or Co-alloyed	annealed	250	839	S3	0,9	30 - 50 - 70	30 - 50 - 70
			heat treated	350	1177	S4	0,7	30 - 55 - 80	30 - 55 - 80
			casting	320	1076	S5	0,7	30 - 50 - 70	30 - 55 - 80
	Titanium alloys	Pure titan	200	675	S6	1,0	50 - 85 - 120	50 - 85 - 120	
		α- and β-alloys, heat treated	375	1262	S7	1,0	40 - 75 - 110	40 - 75 - 110	
		β-alloys	410	1396	S8	1,0	40 - 75 - 110	40 - 75 - 110	
	Wolfram alloys		300	1013	S9	1,1	-	-	
	Molybdän alloys		300	1013	S10	1,0	-	-	
H	Hardened steel	hardened	50 HRC	-	H1		-	-	
		hardened	55 HRC	-	H2		-	-	
		hardened	60 HRC	-	H3		-	-	
	Hardened cast iron	hardened	55 HRC	-	H4		-	-	

The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.




Feed per tooth with radial depth of cut from 0,2 – 0,3 mm

Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,004	0,003	0,003	0,004	0,004	0,005	0,006	0,006	0,007	0,008
2	0,008	0,006	0,006	0,007	0,009	0,010	0,012	0,013	0,014	0,015
3	0,012	0,008	0,010	0,011	0,013	0,014	0,018	0,019	0,022	0,023
4	0,016	0,011	0,013	0,014	0,018	0,019	0,024	0,026	0,029	0,030
5	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
6	0,024	0,017	0,019	0,022	0,026	0,029	0,036	0,038	0,043	0,046
8	0,032	0,022	0,026	0,029	0,035	0,038	0,048	0,051	0,058	0,061
10	0,040	0,028	0,032	0,036	0,044	0,048	0,060	0,064	0,072	0,076
12	0,048	0,034	0,038	0,043	0,053	0,058	0,072	0,077	0,086	0,091
14	0,056	0,039	0,045	0,050	0,062	0,067	0,084	0,090	0,101	0,106
16	0,064	0,045	0,051	0,058	0,070	0,077	0,096	0,102	0,115	0,122
18	0,072	0,050	0,058	0,065	0,079	0,086	0,108	0,115	0,130	0,137
20	0,080	0,056	0,064	0,072	0,088	0,096	0,120	0,128	0,144	0,152
25	0,100	0,070	0,080	0,090	0,110	0,120	0,150	0,160	0,180	0,190

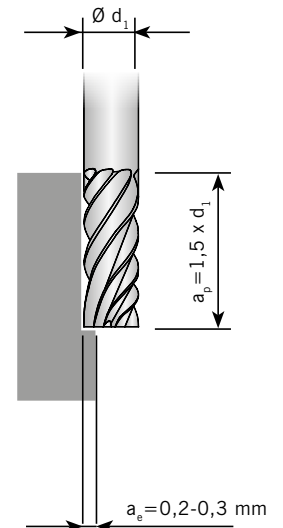

Feed per tooth with radial depth of cut of 10% of the cutter (Ø d₁)

Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,003	0,002	0,002	0,003	0,003	0,004	0,005	0,005	0,005	0,006
2	0,008	0,006	0,006	0,007	0,009	0,010	0,012	0,013	0,014	0,015
3	0,012	0,008	0,010	0,011	0,013	0,014	0,018	0,019	0,022	0,023
4	0,014	0,010	0,011	0,013	0,015	0,017	0,021	0,022	0,025	0,027
5	0,017	0,012	0,014	0,015	0,019	0,020	0,026	0,027	0,031	0,032
6	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
8	0,027	0,019	0,022	0,024	0,030	0,032	0,041	0,043	0,049	0,051
10	0,033	0,023	0,026	0,030	0,036	0,040	0,050	0,053	0,059	0,063
12	0,040	0,028	0,032	0,036	0,044	0,048	0,060	0,064	0,072	0,076
14	0,047	0,033	0,038	0,042	0,052	0,056	0,071	0,075	0,085	0,089
16	0,053	0,037	0,042	0,048	0,058	0,064	0,080	0,085	0,095	0,101
18	0,060	0,042	0,048	0,054	0,066	0,072	0,090	0,096	0,108	0,114
20	0,067	0,047	0,054	0,060	0,074	0,080	0,101	0,107	0,121	0,127
25	0,083	0,058	0,066	0,075	0,091	0,100	0,125	0,133	0,149	0,158

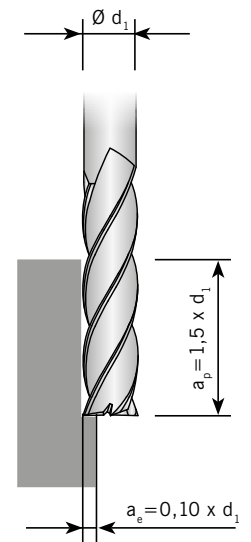


Attention: Take the correction factor from the table "Cutting speeds".
 Correction factor -> 1,1 with $a_p = 1 \times d_1$ -> 1,2 with $a_p = 0,5 \times d_1$

AFV




Feed per tooth with radial depth of cut of 20% of the cutter (ϕd_1)

ϕd_1 [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,002	0,001	0,001	0,001	0,002	0,002	0,003	0,003	0,003	0,003
2	0,005	0,003	0,004	0,004	0,005	0,006	0,007	0,008	0,009	0,009
3	0,008	0,005	0,006	0,007	0,008	0,009	0,012	0,012	0,014	0,015
4	0,010	0,007	0,008	0,009	0,011	0,012	0,015	0,016	0,018	0,019
5	0,013	0,009	0,010	0,011	0,014	0,015	0,019	0,020	0,023	0,024
6	0,015	0,010	0,012	0,013	0,016	0,018	0,022	0,024	0,027	0,028
8	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
10	0,025	0,017	0,020	0,022	0,027	0,030	0,037	0,040	0,045	0,047
12	0,030	0,021	0,024	0,027	0,033	0,036	0,045	0,048	0,054	0,057
14	0,035	0,024	0,028	0,031	0,038	0,042	0,052	0,056	0,063	0,066
16	0,040	0,028	0,032	0,036	0,044	0,048	0,060	0,064	0,072	0,076
18	0,045	0,031	0,036	0,040	0,049	0,054	0,067	0,072	0,081	0,085
20	0,050	0,035	0,040	0,045	0,055	0,060	0,075	0,080	0,090	0,095
25	0,063	0,044	0,050	0,056	0,069	0,075	0,094	0,100	0,113	0,119

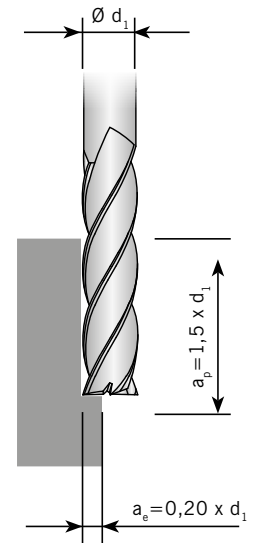

Feed per tooth with radial depth of cut of 40% of the cutter (ϕd_1)

ϕd_1 [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,001	0,002	0,002	0,002	0,003
2	0,004	0,002	0,003	0,003	0,004	0,004	0,006	0,006	0,007	0,007
3	0,006	0,004	0,005	0,005	0,007	0,007	0,009	0,010	0,011	0,012
4	0,008	0,005	0,006	0,007	0,008	0,009	0,012	0,012	0,014	0,015
5	0,010	0,007	0,008	0,009	0,011	0,012	0,015	0,016	0,018	0,019
6	0,012	0,008	0,009	0,010	0,013	0,014	0,018	0,019	0,021	0,022
8	0,016	0,011	0,012	0,014	0,017	0,019	0,024	0,025	0,028	0,030
10	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
12	0,024	0,016	0,019	0,021	0,026	0,028	0,036	0,038	0,043	0,045
14	0,028	0,019	0,022	0,025	0,030	0,033	0,042	0,044	0,050	0,053
16	0,032	0,022	0,025	0,028	0,035	0,038	0,048	0,051	0,057	0,060
18	0,036	0,025	0,028	0,032	0,039	0,043	0,054	0,057	0,064	0,068
20	0,040	0,028	0,032	0,036	0,044	0,048	0,060	0,064	0,072	0,076
25	0,050	0,035	0,040	0,045	0,055	0,060	0,075	0,080	0,090	0,095

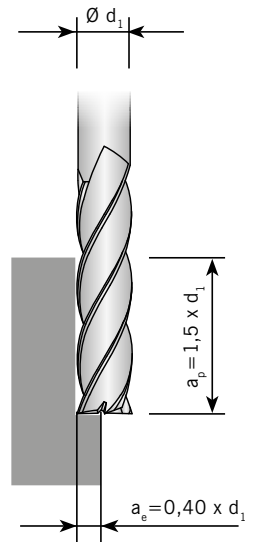


Attention: Feed rate correction factor $\rightarrow Kf f_z = 1,10$ with $a_p = 1 \times d_1$ and $\rightarrow Kf f_z = 1,25$ with $a_p = 0,5 \times d_1$. Feed rates are reduced by 10-20% for uncoated tools.






Feed per tooth with radial depth of cut of 60% of the cutter ($\varnothing d_1$)

$\varnothing d_1$ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,002	0,002	0,002
2	0,003	0,002	0,002	0,002	0,003	0,003	0,004	0,005	0,005	0,006
3	0,005	0,003	0,004	0,004	0,005	0,006	0,007	0,008	0,009	0,009
4	0,006	0,004	0,005	0,005	0,007	0,007	0,009	0,010	0,011	0,012
5	0,008	0,005	0,006	0,007	0,009	0,010	0,012	0,013	0,015	0,016
6	0,009	0,006	0,007	0,008	0,010	0,011	0,014	0,015	0,017	0,018
8	0,013	0,009	0,010	0,011	0,014	0,015	0,019	0,020	0,023	0,024
10	0,016	0,011	0,013	0,014	0,017	0,019	0,024	0,026	0,029	0,030
12	0,019	0,013	0,015	0,017	0,021	0,023	0,029	0,031	0,035	0,037
14	0,022	0,015	0,018	0,020	0,025	0,027	0,034	0,036	0,040	0,043
16	0,026	0,018	0,020	0,023	0,028	0,031	0,039	0,041	0,046	0,049
18	0,029	0,020	0,023	0,026	0,032	0,035	0,043	0,046	0,052	0,055
20	0,032	0,022	0,026	0,029	0,035	0,039	0,048	0,052	0,058	0,061
25	0,040	0,028	0,032	0,036	0,045	0,049	0,061	0,065	0,073	0,077

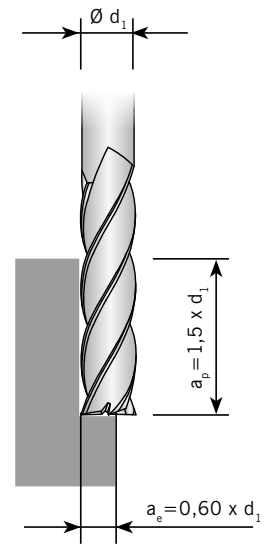

Feed per tooth with radial depth of cut of 80% of the cutter ($\varnothing d_1$)

$\varnothing d_1$ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001	0,001
2	0,002	0,001	0,002	0,002	0,002	0,003	0,003	0,004	0,004	0,004
3	0,004	0,002	0,003	0,003	0,004	0,004	0,006	0,006	0,007	0,007
4	0,005	0,003	0,004	0,004	0,005	0,006	0,007	0,008	0,009	0,009
5	0,006	0,004	0,005	0,005	0,007	0,007	0,009	0,010	0,011	0,012
6	0,007	0,005	0,006	0,006	0,008	0,009	0,011	0,012	0,013	0,014
8	0,010	0,007	0,008	0,009	0,011	0,012	0,015	0,016	0,018	0,019
10	0,012	0,008	0,010	0,011	0,013	0,015	0,018	0,020	0,022	0,023
12	0,015	0,010	0,012	0,013	0,016	0,018	0,022	0,024	0,027	0,028
14	0,017	0,012	0,014	0,015	0,019	0,021	0,026	0,028	0,031	0,033
16	0,020	0,014	0,016	0,018	0,022	0,024	0,030	0,032	0,036	0,038
18	0,022	0,015	0,018	0,020	0,024	0,027	0,033	0,036	0,040	0,042
20	0,025	0,017	0,020	0,022	0,027	0,030	0,037	0,040	0,045	0,047
25	0,031	0,022	0,025	0,028	0,034	0,037	0,047	0,050	0,056	0,059

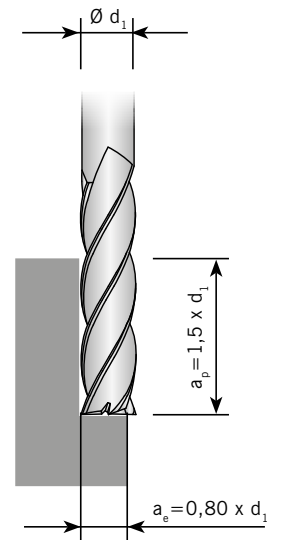


Attention: Take the correction factor from the table "Cutting speeds".
Correction factor -> 1,1 with $a_p = 1 \times d_1$ -> 1,2 with $a_p = 0,5 \times d_1$




Feed per tooth when full slot milling → $a_p = 0,5 \times d_1$

Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,002	0,001	0,001	0,001	0,002	0,002	0,003	0,003	0,003	0,003
2	0,004	0,002	0,003	0,003	0,004	0,004	0,006	0,006	0,007	0,007
3	0,007	0,004	0,005	0,006	0,007	0,008	0,010	0,011	0,012	0,013
4	0,009	0,006	0,007	0,008	0,009	0,010	0,013	0,014	0,016	0,017
5	0,011	0,007	0,008	0,009	0,012	0,013	0,016	0,017	0,019	0,020
6	0,013	0,009	0,010	0,011	0,014	0,015	0,019	0,020	0,023	0,024
8	0,018	0,012	0,014	0,016	0,019	0,021	0,027	0,028	0,032	0,034
10	0,022	0,015	0,017	0,019	0,024	0,026	0,033	0,035	0,039	0,041
12	0,030	0,021	0,024	0,027	0,033	0,036	0,045	0,048	0,054	0,057
14	0,032	0,022	0,025	0,028	0,035	0,038	0,048	0,051	0,057	0,060
16	0,036	0,025	0,028	0,032	0,039	0,043	0,054	0,057	0,064	0,068
18	0,042	0,029	0,033	0,037	0,046	0,050	0,063	0,067	0,075	0,079
20	0,045	0,031	0,036	0,040	0,049	0,054	0,067	0,072	0,081	0,085
25	0,056	0,039	0,044	0,050	0,061	0,067	0,084	0,089	0,100	0,106

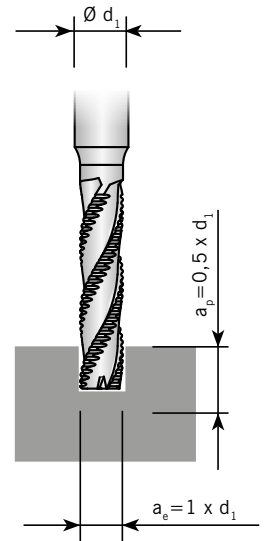

Feed per tooth when full slot milling → $a_p = 1 \times d_1$

Ø d ₁ [mm]	Correction factor									
	1	0,7	0,8	0,9	1,1	1,2	1,5	1,6	1,8	1,9
1	0,001	0,001	0,001	0,001	0,001	0,002	0,002	0,002	0,002	0,002
2	0,003	0,002	0,002	0,002	0,003	0,003	0,004	0,004	0,005	0,005
3	0,005	0,003	0,004	0,004	0,005	0,005	0,007	0,007	0,008	0,009
4	0,006	0,004	0,005	0,005	0,006	0,007	0,009	0,009	0,011	0,011
5	0,007	0,005	0,006	0,006	0,008	0,009	0,011	0,011	0,013	0,014
6	0,008	0,006	0,007	0,008	0,009	0,010	0,013	0,014	0,015	0,016
8	0,012	0,008	0,009	0,011	0,013	0,014	0,018	0,019	0,021	0,022
10	0,014	0,010	0,011	0,013	0,016	0,017	0,021	0,023	0,026	0,027
12	0,020	0,014	0,016	0,018	0,021	0,023	0,029	0,031	0,035	0,037
14	0,021	0,015	0,017	0,019	0,023	0,025	0,031	0,033	0,037	0,040
16	0,023	0,016	0,019	0,021	0,026	0,028	0,035	0,037	0,042	0,044
18	0,027	0,019	0,022	0,025	0,030	0,033	0,041	0,044	0,049	0,052
20	0,029	0,020	0,023	0,026	0,032	0,035	0,044	0,047	0,053	0,056
25	0,036	0,025	0,029	0,033	0,040	0,044	0,055	0,058	0,066	0,069

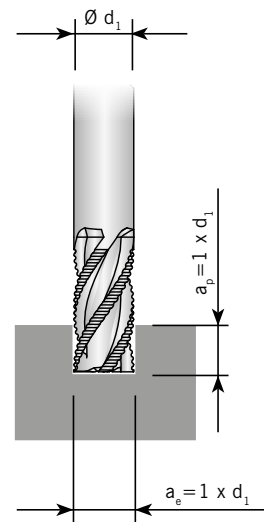

Attention: Feed rates are reduced by 10 - 20% for uncoated tools.






Feed rates for ball nosed- and High feed cutters

Ball nose end milling cutters		Ball nose end milling cutters		Ball nose cutter for mold and die production		Torus end milling cutters		Torus end milling cutters	
d_1 [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]	fz [mm]
2	0,015	0,010	0,005	0,010	0,015	0,010	0,015	0,015	0,020
3	0,030	0,020	0,015	0,015	0,020	0,015	0,020	0,020	0,030
4	0,040	0,030	0,030	0,020	0,030	0,020	0,030	0,030	0,040
5	0,060	0,050	0,050	0,030	0,040	0,030	0,040	0,040	0,060
6	0,070	0,060	0,060	0,050	0,060	0,050	0,060	0,060	0,080
8	0,100	0,080	0,070	0,070	0,080	0,070	0,080	0,080	0,100
10	0,120	0,100	0,080	0,080	0,100	0,080	0,100	0,100	0,120
12	0,150	0,120	0,090	0,100	0,120	0,100	0,120	0,120	0,150
16	0,180	0,150	0,100	0,130	0,150	0,130	0,150	0,150	0,180
18	0,200	0,180	0,110	0,140	0,160	0,140	0,160	0,160	0,200
20	0,220	0,200	0,120	0,150	0,180	0,150	0,180	0,180	0,220
25	0,240	0,220	0,140	0,160	0,200	0,160	0,200	0,200	0,240

Attention: Feed rates are reduced by 10-20% for uncoated tools.

EXCELLENCE IN HIGH SPEED MACHINING.



Even at high speed machining of pre-hardened or naturally hardened materials (up-to 55HRC) the ARNO® AFX cutters achieve excellent tool life. Also suitable for dry machining.

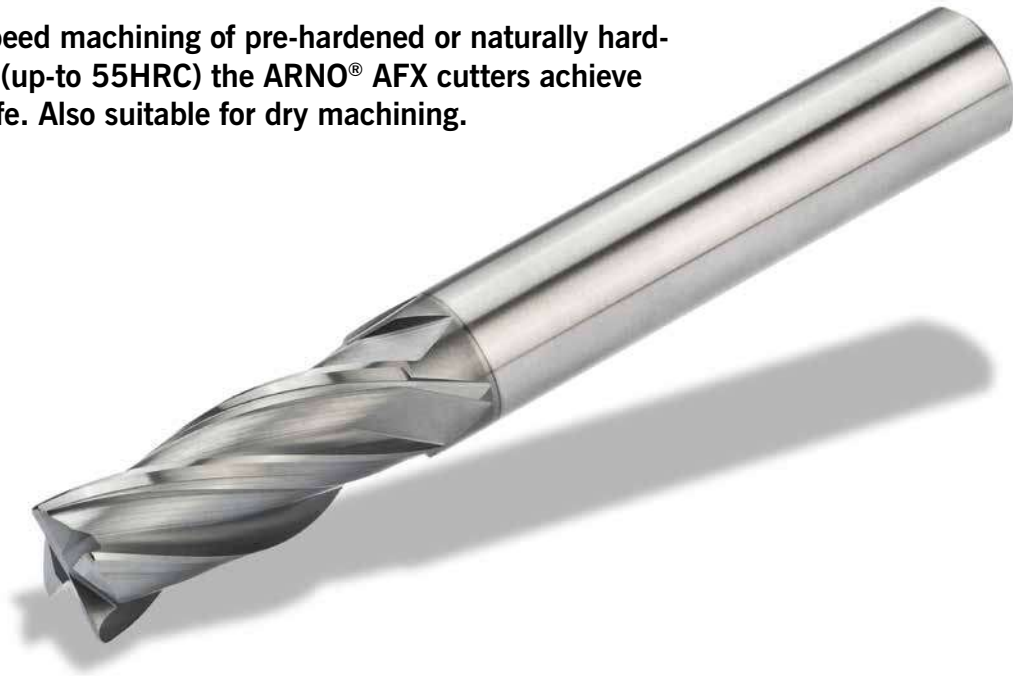



AFX50124-...R...

2 flutes, mini design, with corner radius

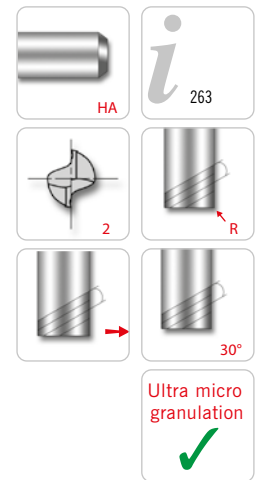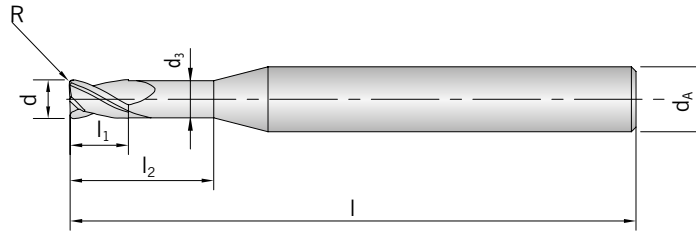

Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,010	PG 24 / Price in £ HC
								£100
AFX50124-002AR0,02	0.2	4	0.17	0.3	1.0	40	0.02	34.05
AFX50124-002AR0,05	0.2	4	0.17	0.3	1.0	40	0.05	34.05
AFX50124-003AR0,02	0.3	4	0.27	0.5	1.0	40	0.02	29.97
AFX50124-003AR0,05	0.3	4	0.27	0.5	1.0	40	0.05	29.97
AFX50124-003BR0,02	0.3	4	0.27	0.5	2.0	40	0.02	29.97
AFX50124-003BR0,05	0.3	4	0.27	0.5	2.0	40	0.05	29.97
AFX50124-004AR0,05	0.4	4	0.37	0.6	1.0	40	0.05	26.47
AFX50124-004AR0,1	0.4	4	0.37	0.6	1.0	40	0.10	26.47
AFX50124-004BR0,05	0.4	4	0.37	0.6	1.5	40	0.05	26.47
AFX50124-004BR0,1	0.4	4	0.37	0.6	2.0	40	0.10	26.47
AFX50124-004CR0,05	0.4	4	0.37	0.6	2.0	40	0.05	26.47
AFX50124-004DR0,05	0.4	4	0.37	0.6	2.5	40	0.05	26.47
AFX50124-005AR0,05	0.5	4	0.45	0.7	1.0	45	0.05	24.19
AFX50124-005AR0,1	0.5	4	0.45	0.7	2.0	45	0.10	24.19
AFX50124-005BR0,05	0.5	4	0.45	0.7	1.5	45	0.05	24.19
AFX50124-005BR0,1	0.5	4	0.45	0.7	3.0	45	0.10	24.19
AFX50124-005CR0,05	0.5	4	0.45	0.7	2.0	45	0.05	24.19
AFX50124-005DR0,05	0.5	4	0.45	0.7	4.0	45	0.05	24.19
AFX50124-006AR0,05	0.6	4	0.55	0.9	3.0	45	0.05	24.19
AFX50124-006AR0,1	0.6	4	0.55	0.9	2.0	45	0.10	24.19
AFX50124-006AR0,2	0.6	4	0.55	0.9	2.0	45	0.20	24.19
AFX50124-006BR0,05	0.6	4	0.55	0.9	6.0	45	0.05	24.19
AFX50124-006BR0,1	0.6	4	0.55	0.9	3.0	45	0.10	24.19
AFX50124-006BR0,2	0.6	4	0.55	0.9	4.0	45	0.20	24.19
AFX50124-006CR0,1	0.6	4	0.55	0.9	4.0	45	0.10	24.19
AFX50124-006CR0,2	0.6	4	0.55	0.9	6.0	45	0.20	24.19
AFX50124-006DR0,1	0.6	4	0.55	0.9	6.0	45	0.10	24.19
AFX50124-008AR0,05	0.8	4	0.75	1.2	2.0	45	0.05	22.73
AFX50124-008AR0,1	0.8	4	0.75	1.2	2.0	45	0.10	22.73
AFX50124-008AR0,2	0.8	4	0.75	1.2	2.0	45	0.20	22.73
AFX50124-008BR0,05	0.8	4	0.75	1.2	4.0	45	0.05	22.73
AFX50124-008BR0,1	0.8	4	0.75	1.2	4.0	45	0.10	22.73
AFX50124-008BR0,2	0.8	4	0.75	1.2	4.0	45	0.20	22.73
AFX50124-008CR0,05	0.8	4	0.75	1.2	6.0	45	0.05	22.73
AFX50124-008CR0,1	0.8	4	0.75	1.2	6.0	45	0.10	22.73
AFX50124-008CR0,2	0.8	4	0.75	1.2	6.0	45	0.20	22.73



Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,010	PG 24 / Price in £ HC
								\$100
AFX50124-008DR0,1	0.8	4	0.75	1.2	8.0	45	0.10	22.73
AFX50124-008DR0,2	0.8	4	0.75	1.2	8.0	45	0.20	22.73
AFX50124-010AR0,05	1.0	4	0.95	1.5	3.0	50	0.05	20.70
AFX50124-010AR0,1	1.0	4	0.95	1.5	3.0	50	0.10	20.70
AFX50124-010AR0,2	1.0	4	0.95	1.5	3.0	50	0.20	20.70
AFX50124-010AR0,3	1.0	4	0.95	1.5	4.0	50	0.30	20.70
AFX50124-010BR0,05	1.0	4	0.95	1.5	4.0	50	0.05	20.70
AFX50124-010BR0,1	1.0	4	0.95	1.5	4.0	50	0.10	20.70
AFX50124-010BR0,2	1.0	4	0.95	1.5	4.0	50	0.20	20.70
AFX50124-010BR0,3	1.0	4	0.95	1.5	6.0	50	0.30	20.70
AFX50124-010CR0,05	1.0	4	0.95	1.5	6.0	50	0.05	20.70
AFX50124-010CR0,1	1.0	4	0.95	1.5	6.0	50	0.10	20.70
AFX50124-010CR0,2	1.0	4	0.95	1.5	6.0	50	0.20	20.70
AFX50124-010CR0,3	1.0	4	0.95	1.5	8.0	50	0.30	20.70
AFX50124-010DR0,1	1.0	4	0.95	1.5	8.0	50	0.10	20.70
AFX50124-010DR0,2	1.0	4	0.95	1.5	8.0	50	0.20	20.70
AFX50124-010DR0,3	1.0	4	0.95	1.5	10.0	50	0.30	20.70
AFX50124-010ER0,1	1.0	4	0.95	1.5	10.0	50	0.10	20.70
AFX50124-010ER0,2	1.0	4	0.95	1.5	10.0	50	0.20	20.70
AFX50124-010FR0,2	1.0	4	0.95	1.5	12.0	50	0.20	21.89
AFX50124-012AR0,05	1.2	4	1.15	1.8	6.0	50	0.05	20.70
AFX50124-012AR0,1	1.2	4	1.15	1.8	4.0	50	0.10	20.70
AFX50124-012AR0,2	1.2	4	1.15	1.8	4.0	50	0.20	20.70
AFX50124-012AR0,3	1.2	4	1.15	1.8	4.0	50	0.30	20.70
AFX50124-012BR0,05	1.2	4	1.15	1.8	8.0	50	0.05	20.70
AFX50124-012BR0,1	1.2	4	1.15	1.8	6.0	50	0.10	20.70
AFX50124-012BR0,2	1.2	4	1.15	1.8	6.0	50	0.20	20.70
AFX50124-012BR0,3	1.2	4	1.15	1.8	6.0	50	0.30	20.70
AFX50124-012CR0,05	1.2	4	1.15	1.8	10.0	50	0.05	20.70
AFX50124-012CR0,1	1.2	4	1.15	1.8	8.0	50	0.10	20.70
AFX50124-012CR0,2	1.2	4	1.15	1.8	8.0	50	0.20	20.70
AFX50124-012CR0,3	1.2	4	1.15	1.8	8.0	50	0.30	20.70
AFX50124-015AR0,05	1.5	4	1.45	2.3	4.0	50	0.05	20.70
AFX50124-015AR0,1	1.5	4	1.45	2.3	4.0	50	0.10	20.70
AFX50124-015AR0,2	1.5	4	1.45	2.3	6.0	50	0.20	20.70
AFX50124-015AR0,3	1.5	4	1.45	2.3	4.0	50	0.30	20.70
AFX50124-015AR0,5	1.5	4	1.45	2.3	4.0	50	0.50	20.70
AFX50124-015BR0,05	1.5	4	1.45	2.3	6.0	50	0.05	20.70
AFX50124-015BR0,1	1.5	4	1.45	2.3	6.0	50	0.10	20.70
AFX50124-015BR0,2	1.5	4	1.45	2.3	6.0	50	0.20	20.70
AFX50124-015BR0,3	1.5	4	1.45	2.3	6.0	50	0.30	20.70
AFX50124-015BR0,5	1.5	4	1.45	2.3	12.0	50	0.50	21.89
AFX50124-015CR0,05	1.5	4	1.45	2.3	8.0	50	0.05	20.70
AFX50124-015CR0,1	1.5	4	1.45	2.3	8.0	50	0.10	20.70
AFX50124-015CR0,2	1.5	4	1.45	2.3	12.0	50	0.20	20.70
AFX50124-015CR0,3	1.5	4	1.45	2.3	8.0	50	0.30	20.70
AFX50124-015DR0,2	1.5	4	1.45	2.3	4.0	50	0.20	20.70
AFX50124-015DR0,3	1.5	4	1.45	2.3	10.0	50	0.30	20.70
AFX50124-015ER0,2	1.5	4	1.45	2.3	6.0	50	0.20	21.89
AFX50124-015ER0,3	1.5	4	1.45	2.3	12.0	50	0.30	21.89
AFX50124-020AR0,1	2.0	4	1.95	3.0	6.0	50	0.10	19.74
AFX50124-020AR0,2	2.0	4	1.95	3.0	6.0	50	0.20	19.74
AFX50124-020AR0,3	2.0	4	1.95	3.0	6.0	50	0.30	19.74
AFX50124-020AR0,5	2.0	4	1.95	3.0	6.0	50	0.50	19.74
AFX50124-020BR0,1	2.0	4	1.95	3.0	8.0	50	0.10	19.74
AFX50124-020BR0,2	2.0	4	1.95	3.0	8.0	50	0.20	19.74
AFX50124-020BR0,3	2.0	4	1.95	3.0	8.0	50	0.30	19.74
AFX50124-020BR0,5	2.0	4	1.95	3.0	8.0	50	0.50	19.74



Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,010	PG 24 / Price in £ HC
								\$100
AFX50124-020CR0,1	2.0	4	1.95	3.0	10.0	50	0.10	19.74
AFX50124-020CR0,2	2.0	4	1.95	3.0	10.0	50	0.20	19.74
AFX50124-020CR0,3	2.0	4	1.95	3.0	10.0	50	0.30	19.74
AFX50124-020CR0,5	2.0	4	1.95	3.0	10.0	50	0.50	19.74
AFX50124-020DR0,1	2.0	4	1.95	3.0	12.0	50	0.10	19.74
AFX50124-020DR0,2	2.0	4	1.95	3.0	12.0	50	0.20	19.74
AFX50124-020DR0,3	2.0	4	1.95	3.0	12.0	50	0.30	19.74
AFX50124-020DR0,5	2.0	4	1.95	3.0	12.0	50	0.50	19.74
AFX50124-020ER0,2	2.0	4	1.95	3.0	16.0	50	0.20	21.05
AFX50124-020ER0,3	2.0	4	1.95	3.0	16.0	50	0.30	21.05
AFX50124-020ER0,5	2.0	4	1.95	3.0	14.0	50	0.50	19.74
AFX50124-020FR0,5	2.0	4	1.95	3.0	16.0	50	0.50	21.05
AFX50124-030AR0,1	3.0	6	2.85	4.5	10.0	50	0.10	29.48
AFX50124-030AR0,2	3.0	6	2.85	4.5	8.0	50	0.20	29.48
AFX50124-030AR0,3	3.0	6	2.85	4.5	8.0	50	0.30	29.48
AFX50124-030AR0,5	3.0	6	2.85	4.5	8.0	50	0.50	29.48
AFX50124-030AR1,0	3.0	6	2.85	4.5	8.0	50	1.00	29.48
AFX50124-030BR0,1	3.0	6	2.85	4.5	12.0	50	0.10	29.48
AFX50124-030BR0,2	3.0	6	2.85	4.5	10.0	50	0.20	29.48
AFX50124-030BR0,3	3.0	6	2.85	4.5	10.0	50	0.30	29.48
AFX50124-030BR0,5	3.0	6	2.85	4.5	10.0	50	0.50	29.48
AFX50124-030BR1,0	3.0	6	2.85	4.5	10.0	50	1.00	29.48
AFX50124-030CR0,1	3.0	6	2.85	4.5	16.0	60	0.10	29.73
AFX50124-030CR0,2	3.0	6	2.85	4.5	12.0	50	0.20	29.48
AFX50124-030CR0,3	3.0	6	2.85	4.5	12.0	50	0.30	29.48
AFX50124-030CR0,5	3.0	6	2.85	4.5	12.0	50	0.50	29.48
AFX50124-030CR1,0	3.0	6	2.85	4.5	12.0	50	1.00	29.48
AFX50124-030DR0,2	3.0	6	2.85	4.5	16.0	60	0.20	29.73
AFX50124-030DR0,3	3.0	6	2.85	4.5	16.0	60	0.30	29.73
AFX50124-030DR0,5	3.0	6	2.85	4.5	16.0	60	0.50	29.73
AFX50124-030DR1,0	3.0	6	2.85	4.5	16.0	60	1.00	29.73
AFX50124-030ER0,2	3.0	6	2.85	4.5	20.0	60	0.20	29.73
AFX50124-030ER0,3	3.0	6	2.85	4.5	20.0	60	0.30	29.73
AFX50124-030ER0,5	3.0	6	2.85	4.5	20.0	60	0.50	29.73
AFX50124-030ER1,0	3.0	6	2.85	4.5	20.0	60	1.00	29.73
AFX50124-030FR0,2	3.0	6	2.85	4.5	26.0	65	0.20	29.73
AFX50124-030FR0,5	3.0	6	2.85	4.5	26.0	65	0.50	29.73
AFX50124-040AR0,1	4.0	6	3.85	6.0	10.0	50	0.10	28.99
AFX50124-040AR0,2	4.0	6	3.85	6.0	10.0	50	0.20	28.99
AFX50124-040AR0,3	4.0	6	3.85	6.0	12.0	50	0.30	28.99
AFX50124-040AR0,5	4.0	6	3.85	6.0	10.0	50	0.50	28.99
AFX50124-040AR1,0	4.0	6	3.85	6.0	10.0	50	1.00	28.99
AFX50124-040BR0,1	4.0	6	3.85	6.0	12.0	50	0.10	28.99
AFX50124-040BR0,2	4.0	6	3.85	6.0	12.0	50	0.20	28.99
AFX50124-040BR0,3	4.0	6	3.85	6.0	16.0	60	0.30	29.48
AFX50124-040BR0,5	4.0	6	3.85	6.0	12.0	50	0.50	28.99
AFX50124-040BR1,0	4.0	6	3.85	6.0	12.0	50	1.00	28.99
AFX50124-040CR0,1	4.0	6	3.85	6.0	16.0	60	0.10	29.48
AFX50124-040CR0,2	4.0	6	3.85	6.0	16.0	60	0.20	29.48
AFX50124-040CR0,3	4.0	6	3.85	6.0	20.0	60	0.30	29.48
AFX50124-040CR0,5	4.0	6	3.85	6.0	16.0	60	0.50	29.48
AFX50124-040CR1,0	4.0	6	3.85	6.0	16.0	60	1.00	29.48
AFX50124-040DR0,2	4.0	6	3.85	6.0	20.0	60	0.20	29.48
AFX50124-040DR0,3	4.0	6	3.85	6.0	26.0	65	0.30	29.48



Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,010	PG 24 / Price in £ HC
								\$100
AFX50124-040DR0,5	4.0	6	3.85	6.0	20.0	60	0.50	29.48
AFX50124-040DR1,0	4.0	6	3.85	6.0	20.0	60	1.00	29.48
AFX50124-040ER0,2	4.0	6	3.85	6.0	26.0	65	0.20	29.48
AFX50124-040ER0,5	4.0	6	3.85	6.0	26.0	65	0.50	29.48
AFX50124-040FR0,5	4.0	6	3.85	6.0	30.0	70	0.50	37.78

HC = Carbide coated

P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application

Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,010	PG 24 / Price in £ HC
								\$100
AFX50124-060AR0,2	6	6	5.85	9	20	60	0.2	29.48
AFX50124-060AR0,3	6	6	5.85	9	20	60	0.3	29.48
AFX50124-060AR0,5	6	6	5.85	9	20	60	0.5	29.48
AFX50124-060AR1,0	6	6	5.85	9	20	60	1.0	29.48
AFX50124-060BR0,5	6	6	5.85	15	30	90	0.5	38.02
AFX50124-080AR0,2	8	8	7.70	12	25	70	0.2	37.06
AFX50124-080AR0,3	8	8	7.70	12	25	70	0.3	37.06
AFX50124-080AR0,5	8	8	7.70	12	25	70	0.5	37.06
AFX50124-080AR1,0	8	8	7.70	15	25	70	1.0	37.06
AFX50124-100AR0,3	10	10	9.70	15	30	75	0.3	50.05
AFX50124-100AR0,5	10	10	9.70	15	30	75	0.5	50.05
AFX50124-100AR1,0	10	10	9.70	18	30	75	1.0	50.05
AFX50124-120AR0,5	12	12	11.70	18	32	80	0.5	68.34
AFX50124-120AR1,0	12	12	11.70	18	32	80	1.0	68.34
AFX50124-120AR1,5	12	12	11.70	18	32	80	1.5	73.16
AFX50124-160AR0,5	16	16	15.70	20	35	100	0.5	118.51
AFX50124-160AR1,0	16	16	15.70	20	35	100	1.0	118.51
AFX50124-200AR0,5	20	20	19.70	25	40	100	0.5	196.60
AFX50124-200AR1,0	20	20	19.70	25	40	100	1.0	196.60



HC = Carbide coated

P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application



AFX50120-...
2 flutes, short design

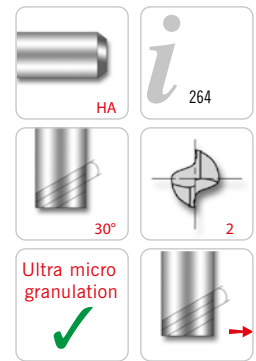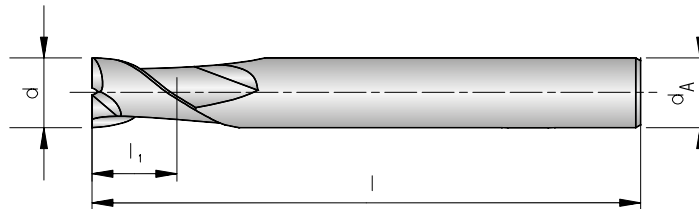

Shank DIN 6535HA	d -0,012	d _A h6	l ₁	l	PG 24 / Price in £ HC
					\$/100
AFX50120-001	0.1	4	0.2	40	38.26
AFX50120-002	0.2	4	0.4	40	29.84
AFX50120-003	0.3	4	0.6	40	26.36
AFX50120-004	0.4	4	0.8	40	23.23
AFX50120-005	0.5	4	1.0	40	20.35
AFX50120-006	0.6	4	1.2	40	19.13
AFX50120-007	0.7	4	1.4	40	18.53
AFX50120-008	0.8	4	1.6	40	17.44
AFX50120-009	0.9	4	1.8	40	17.44
AFX50120-010	1.0	6	2.5	50	23.82
AFX50120-012	1.2	6	3.0	50	23.82
AFX50120-015	1.5	6	4.0	50	23.82
AFX50120-020	2.0	6	6.0	50	21.79
AFX50120-025	2.5	6	7.0	50	21.79
AFX50120-030	3.0	6	8.0	50	21.79
AFX50120-035	3.5	6	10.0	50	21.79
AFX50120-040	4.0	6	10.0	50	21.79
AFX50120-045	4.5	6	14.0	50	21.79
AFX50120-050	5.0	6	15.0	60	21.79
AFX50120-055	5.5	6	15.0	60	21.79

HC = Carbide coated

P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application



Shank DIN 6535HA	d -0,012	d _A h6	l ₁	l	PG 24 / Price in £ HC
					\$/100
AFX50120-060	6.0	6	15	60	21.79
AFX50120-065	6.5	8	18	60	27.07
AFX50120-070	7.0	8	20	60	27.07
AFX50120-075	7.5	8	20	60	27.07
AFX50120-080	8.0	8	20	70	27.07
AFX50120-085	8.5	10	22	70	40.19
AFX50120-090	9.0	10	22	70	40.19
AFX50120-095	9.5	10	24	70	40.19
AFX50120-100	10.0	10	25	75	40.19
AFX50120-105	10.5	12	26	75	55.11
AFX50120-110	11.0	12	30	75	55.11
AFX50120-115	11.5	12	30	80	55.11
AFX50120-120	12.0	12	30	80	55.11
AFX50120-130	13.0	12	35	100	73.16
AFX50120-140	14.0	16	35	100	95.55
AFX50120-150	15.0	16	38	100	95.55
AFX50120-160	16.0	16	40	100	95.55
AFX50120-180	18.0	16	45	100	127.67
AFX50120-200	20.0	20	45	100	158.47

HC = Carbide coated



P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application



AFX50121-...

2 flutes, long design

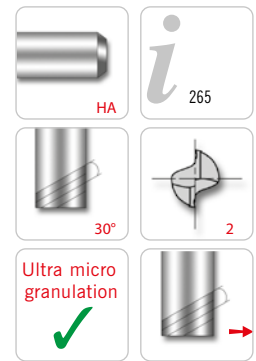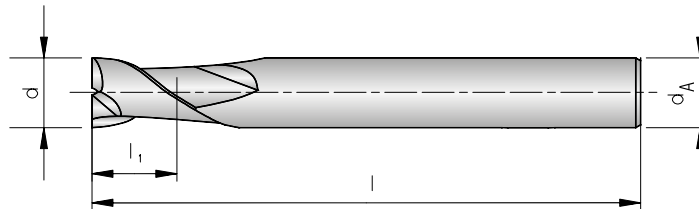

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					\$/100
AFX50121-010A	1.0	6	3	60	23.82
AFX50121-010B	1.0	6	4	60	23.82
AFX50121-010C	1.0	6	6	60	25.03
AFX50121-010D	1.0	6	8	60	26.23
AFX50121-010E	1.0	6	10	60	28.64
AFX50121-015A	1.5	6	6	60	23.82
AFX50121-015B	1.5	6	8	60	25.03
AFX50121-015C	1.5	6	10	60	26.23
AFX50121-015D	1.5	6	12	60	28.64
AFX50121-015E	1.5	6	16	60	32.13
AFX50121-020A	2.0	6	8	60	21.79
AFX50121-020B	2.0	6	10	60	22.73
AFX50121-020C	2.0	6	12	60	23.94
AFX50121-020D	2.0	6	16	60	26.11
AFX50121-025A	2.5	6	10	60	21.79
AFX50121-025B	2.5	6	16	60	23.94
AFX50121-030A	3.0	6	10	70	29.36
AFX50121-030B	3.0	6	12	70	29.36
AFX50121-030C	3.0	6	16	70	29.36
AFX50121-030D	3.0	6	20	70	29.36
AFX50121-030E	3.0	6	26	70	32.97
AFX50121-040A	4.0	6	12	70	29.36
AFX50121-040B	4.0	6	16	70	29.36
AFX50121-040C	4.0	6	20	70	29.36
AFX50121-040D	4.0	6	26	70	32.97
AFX50121-040E	4.0	6	30	70	35.38
AFX50121-050A	5.0	6	20	70	29.36
AFX50121-050B	5.0	6	25	70	32.97
AFX50121-050C	5.0	6	30	80	36.22
AFX50121-050D	5.0	6	40	100	43.55
AFX50121-060A	6.0	6	15	60	21.79
AFX50121-060B	6.0	6	15	80	29.36
AFX50121-060C	6.0	6	20	70	29.36
AFX50121-060D	6.0	6	20	90	31.65
AFX50121-060E	6.0	6	25	75	32.97
AFX50121-060F	6.0	6	30	80	35.61



Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					\$100
AFX50121-060G	6.0	6	30	100	38.50
AFX50121-060H	6.0	6	30	150	46.21
AFX50121-060I	6.0	6	35	90	40.19
AFX50121-060J	6.0	6	40	90	40.91
AFX50121-060K	6.0	6	45	150	54.76
AFX50121-080A	8.0	8	25	80	34.54
AFX50121-080B	8.0	8	30	80	34.54
AFX50121-080C	8.0	8	35	90	38.62
AFX50121-080D	8.0	8	40	90	41.26
AFX50121-080E	8.0	8	40	120	46.33
AFX50121-080F	8.0	8	45	100	45.72
AFX50121-080G	8.0	8	50	100	46.68
AFX50121-100A	10.0	10	30	80	46.33
AFX50121-100B	10.0	10	30	100	49.94
AFX50121-100C	10.0	10	35	90	48.26
AFX50121-100D	10.0	10	40	90	51.74
AFX50121-100E	10.0	10	40	120	57.99
AFX50121-100F	10.0	10	45	100	56.06
AFX50121-100G	10.0	10	50	100	59.57
AFX50121-100H	10.0	10	50	150	71.35
AFX50121-100I	10.0	10	60	110	72.67
AFX50121-120A	12.0	12	35	90	66.17
AFX50121-120B	12.0	12	40	100	68.71
AFX50121-120C	12.0	12	40	120	83.38
AFX50121-120D	12.0	12	45	130	89.52
AFX50121-120E	12.0	12	50	100	86.38
AFX50121-120F	12.0	12	55	110	92.18
AFX50121-120G	12.0	12	60	110	98.20
AFX50121-120H	12.0	12	60	150	113.69
AFX50121-140	14.0	16	50	110	123.33
AFX50121-160A	16.0	16	40	150	131.64
AFX50121-160B	16.0	16	50	110	123.33
AFX50121-180	18.0	20	50	120	184.34
AFX50121-200A	20.0	20	90	200	327.40
AFX50121-200B	20.0	20	110	200	355.80

HC = Carbide coated

P	●
M	○
K	●
N	
S	
H	●



● Main application
○ Secondary application

AFX



AFX50121-...R...

2 flutes, long design with corner radius

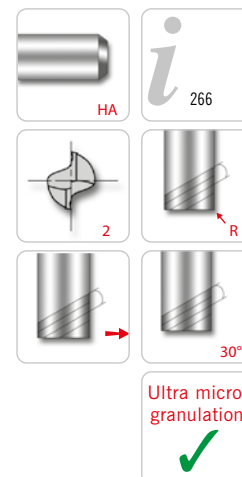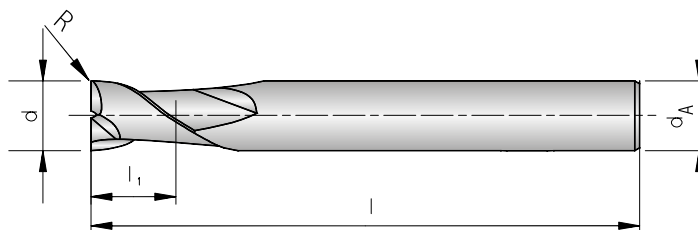

Shank DIN 6535HA	d -0,012	d _A h6	l ₁	l	R ±0,010	PG 24 / Price in £ HC
						£100
AFX50121-010AR0,1	1.0	4	2.5	50	0.1	31.52
AFX50121-010AR0,2	1.0	4	2.5	50	0.2	31.52
AFX50121-010AR0,3	1.0	4	2.5	50	0.3	31.52
AFX50121-015AR0,2	1.5	4	4.0	50	0.2	31.52
AFX50121-015AR0,3	1.5	4	4.0	50	0.3	31.52
AFX50121-015AR0,5	1.5	4	4.0	50	0.5	31.52
AFX50121-020AR0,1	2.0	4	6.0	50	0.1	28.75
AFX50121-020AR0,2	2.0	4	6.0	50	0.2	28.75
AFX50121-020AR0,3	2.0	4	6.0	50	0.3	28.75
AFX50121-020AR0,5	2.0	4	6.0	50	0.5	28.75
AFX50121-030AR0,1	3.0	6	8.0	60	0.1	28.75
AFX50121-030AR0,2	3.0	6	8.0	60	0.2	28.75
AFX50121-030AR0,3	3.0	6	8.0	60	0.3	28.75
AFX50121-030AR0,5	3.0	6	8.0	60	0.5	28.75
AFX50121-040AR0,2	4.0	4	10.0	70	0.2	29.84
AFX50121-040AR0,3	4.0	4	10.0	70	0.3	29.84
AFX50121-040AR0,5	4.0	4	10.0	70	0.5	29.84
AFX50121-040AR1,0	4.0	4	10.0	70	1.0	29.84
AFX50121-050AR0,2	5.0	6	13.0	90	0.2	31.65
AFX50121-050AR0,3	5.0	6	13.0	90	0.3	31.65
AFX50121-050AR0,5	5.0	6	13.0	90	0.5	31.65
AFX50121-050AR1,0	5.0	6	13.0	90	1.0	31.65

HC = Carbide coated

P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application



Shank DIN 6535HA	d -0,012	d _A h6	l ₁	l	R ±0,010	PG 24 / Price in £ HC
						\$100
AFX50121-060AR0,2	6	6	15	60	0.2	28.75
AFX50121-060AR0,3	6	6	15	60	0.3	28.75
AFX50121-060AR0,5	6	6	15	60	0.5	28.75
AFX50121-060AR1,0	6	6	15	60	1.0	28.75
AFX50121-060BR0,2	6	6	15	90	0.2	31.65
AFX50121-060BR0,3	6	6	15	90	0.3	31.65
AFX50121-060BR0,5	6	6	15	90	0.5	31.65
AFX50121-060BR1,0	6	6	15	90	1.0	31.65
AFX50121-060CR1,0	6	6	15	110	1.0	40.07
AFX50121-060DR1,0	6	6	15	130	1.0	43.68
AFX50121-080AR0,2	8	8	20	100	0.2	40.42
AFX50121-080AR0,3	8	8	20	70	0.3	35.85
AFX50121-080AR0,5	8	8	20	70	0.5	35.85
AFX50121-080AR1,0	8	8	20	70	1.0	35.85
AFX50121-080AR2,0	8	8	20	100	2.0	43.08
AFX50121-080BR0,5	8	8	20	100	0.5	40.42
AFX50121-080BR1,0	8	8	20	100	1.0	40.42
AFX50121-080BR1,5	8	8	20	100	1.5	43.08
AFX50121-100AR0,2	10	10	25	100	0.2	53.42
AFX50121-100AR0,5	10	10	25	75	0.5	48.26
AFX50121-100AR1,0	10	10	25	75	1.0	48.26
AFX50121-100AR1,5	10	10	25	100	1.5	58.23
AFX50121-100AR2,0	10	10	25	100	2.0	58.23
AFX50121-100BR0,5	10	10	25	100	0.5	53.42
AFX50121-100BR1,0	10	10	25	100	1.0	53.42
AFX50121-120AR0,3	12	12	30	110	0.3	86.62
AFX50121-120AR0,5	12	12	30	80	0.5	65.94
AFX50121-120AR1,0	12	12	30	80	1.0	65.94
AFX50121-120AR1,5	12	12	30	110	1.5	93.38
AFX50121-120AR2,0	12	12	30	110	2.0	93.38
AFX50121-120AR2,5	12	12	30	110	2.5	93.38
AFX50121-120AR3,0	12	12	30	110	3.0	98.06
AFX50121-120BR0,5	12	12	30	110	0.5	86.62
AFX50121-120BR1,0	12	12	30	110	1.0	86.62
AFX50121-120CR1,0	12	12	30	130	1.0	94.82
AFX50121-160AR1,0	16	16	35	150	1.0	138.97
AFX50121-160AR2,0	16	16	32	150	2.0	151.25
AFX50121-160BR1,0	16	16	32	150	1.0	138.97
AFX50121-200AR1,0	20	20	38	150	1.0	228.97
AFX50121-200AR2,0	20	20	38	150	2.0	249.45

HC = Carbide coated



P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application



AFX50122-...

2 flutes, extra long design

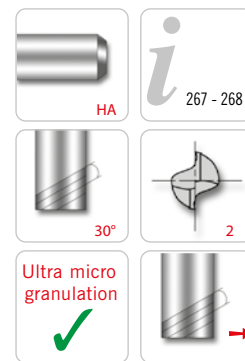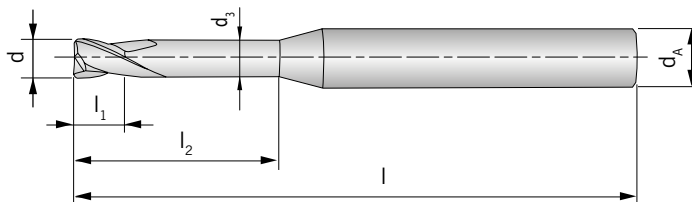

Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	PG 24 / Price in £ HC
							£100
AFX50122-002A	0.2	4	0.17	0.3	1.0	40	31.41
AFX50122-003A	0.3	4	0.27	0.5	1.5	40	27.67
AFX50122-003B	0.3	4	0.27	0.5	2.0	40	27.67
AFX50122-004A	0.4	4	0.37	0.6	1.0	40	24.42
AFX50122-004B	0.4	4	0.37	0.6	1.5	40	24.42
AFX50122-004C	0.4	4	0.37	0.6	2.0	40	24.42
AFX50122-004D	0.4	4	0.37	0.6	3.0	40	24.42
AFX50122-004E	0.4	4	0.37	0.6	4.0	40	24.42
AFX50122-004F	0.4	4	0.37	0.6	5.0	40	28.05
AFX50122-005A	0.5	4	0.45	0.7	2.0	45	22.39
AFX50122-005B	0.5	4	0.45	0.7	3.0	45	22.39
AFX50122-005C	0.5	4	0.45	0.7	4.0	45	22.39
AFX50122-005D	0.5	4	0.45	0.7	5.0	45	22.39
AFX50122-005E	0.5	4	0.45	0.7	6.0	45	22.39
AFX50122-006A	0.6	4	0.55	0.9	2.0	45	22.39
AFX50122-006B	0.6	4	0.55	0.9	3.0	45	22.39
AFX50122-006C	0.6	4	0.55	0.9	4.0	45	22.39
AFX50122-006D	0.6	4	0.55	0.9	5.0	45	22.39
AFX50122-006E	0.6	4	0.55	0.9	6.0	45	22.39
AFX50122-006F	0.6	4	0.55	0.9	8.0	45	25.63
AFX50122-006G	0.6	4	0.55	0.9	10.0	45	25.75
AFX50122-008A	0.8	4	0.75	1.2	2.0	45	20.35
AFX50122-008B	0.8	4	0.75	1.2	3.0	45	20.35
AFX50122-008C	0.8	4	0.75	1.2	4.0	45	20.35
AFX50122-008D	0.8	4	0.75	1.2	5.0	45	20.35
AFX50122-008E	0.8	4	0.75	1.2	6.0	45	20.35
AFX50122-008F	0.8	4	0.75	1.2	8.0	45	20.35
AFX50122-008G	0.8	4	0.75	1.2	10.0	45	23.47
AFX50122-010A	1.0	4	0.95	1.5	3.0	50	18.53
AFX50122-010B	1.0	4	0.95	1.5	4.0	50	18.53
AFX50122-010C	1.0	4	0.95	1.5	5.0	50	18.53
AFX50122-010D	1.0	4	0.95	1.5	6.0	50	18.53
AFX50122-010E	1.0	4	0.95	1.5	8.0	50	18.53
AFX50122-010F	1.0	4	0.95	1.5	10.0	50	18.53
AFX50122-010G	1.0	4	0.95	1.5	12.0	50	19.61
AFX50122-010H	1.0	4	0.95	1.5	14.0	50	20.35



Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	PG 24 / Price in £ HC
							\$100
AFX50122-010I	1.0	4	0.95	1.5	16.0	50	20.35
AFX50122-010J	1.0	4	0.95	1.5	20.0	50	20.57
AFX50122-012A	1.2	4	1.15	1.8	6.0	50	18.53
AFX50122-012B	1.2	4	1.15	1.8	8.0	50	18.53
AFX50122-012C	1.2	4	1.15	1.8	10.0	50	18.53
AFX50122-014A	1.4	4	1.35	2.1	6.0	50	18.53
AFX50122-014B	1.4	4	1.35	2.1	8.0	50	18.53
AFX50122-015A	1.5	4	1.45	2.3	4.0	50	18.53
AFX50122-015B	1.5	4	1.45	2.3	6.0	50	18.53
AFX50122-015C	1.5	4	1.45	2.3	8.0	50	18.53
AFX50122-015D	1.5	4	1.45	2.3	10.0	50	18.53
AFX50122-015E	1.5	4	1.45	2.3	12.0	50	19.37
AFX50122-015F	1.5	4	1.45	2.3	14.0	50	19.37
AFX50122-015G	1.5	4	1.45	2.3	16.0	50	20.35
AFX50122-015H	1.5	4	1.45	2.3	20.0	50	20.35
AFX50122-018A	1.8	4	1.75	2.7	8.0	50	18.53
AFX50122-018B	1.8	4	1.75	2.7	10.0	50	18.53
AFX50122-018C	1.8	4	1.75	2.7	12.0	50	19.61
AFX50122-020A	2.0	4	1.95	3.0	6.0	50	17.68
AFX50122-020B	2.0	4	1.95	3.0	8.0	50	17.68
AFX50122-020C	2.0	4	1.95	3.0	10.0	50	17.68
AFX50122-020D	2.0	4	1.95	3.0	12.0	50	17.68
AFX50122-020E	2.0	4	1.95	3.0	14.0	50	17.68
AFX50122-020F	2.0	4	1.95	3.0	16.0	50	18.77
AFX50122-020G	2.0	4	1.95	3.0	20.0	50	18.77
AFX50122-025A	2.5	4	2.40	4.0	8.0	50	17.68
AFX50122-025B	2.5	4	2.40	4.0	12.0	50	17.68
AFX50122-025C	2.5	4	2.40	4.0	16.0	50	18.77
AFX50122-025D	2.5	4	2.40	4.0	20.0	50	18.77
AFX50122-030A	3.0	6	2.85	4.5	8.0	50	26.47
AFX50122-030B	3.0	6	2.85	4.5	10.0	50	26.47
AFX50122-030C	3.0	6	2.85	4.5	12.0	50	26.47
AFX50122-030D	3.0	6	2.85	4.5	14.0	60	26.71
AFX50122-030E	3.0	6	2.85	4.5	16.0	60	26.71
AFX50122-030F	3.0	6	2.85	4.5	18.0	60	26.71
AFX50122-030G	3.0	6	2.85	4.5	20.0	60	26.71
AFX50122-030H	3.0	6	2.85	4.5	26.0	65	26.71
AFX50122-040A	4.0	6	3.85	6.0	10.0	50	26.47
AFX50122-040B	4.0	6	3.85	6.0	12.0	50	26.47
AFX50122-040C	4.0	6	3.85	6.0	16.0	60	26.71
AFX50122-040D	4.0	6	3.85	6.0	18.0	60	26.71
AFX50122-040E	4.0	6	3.85	6.0	20.0	60	26.71
AFX50122-040F	4.0	6	3.85	6.0	26.0	65	26.71
AFX50122-040G	4.0	6	3.85	6.0	30.0	70	34.17
AFX50122-050A	5.0	6	4.85	8.0	20.0	60	26.71
AFX50122-050B	5.0	6	4.85	8.0	30.0	70	34.17
AFX50122-050C	5.0	6	4.85	8.0	35.0	75	34.17
AFX50122-050D	5.0	6	4.85	8.0	40.0	80	34.41
AFX50122-050E	5.0	6	4.85	8.0	50.0	90	39.10

HC = Carbide coated

P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application

AFX



Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	PG 24 / Price in £ HC
							\$/100
AFX50122-060A	6	6	5.85	9	15	60	26.71
AFX50122-060B	6	6	5.85	9	20	60	26.71
AFX50122-060C	6	6	5.85	9	30	70	34.17
AFX50122-080A	8	8	7.70	12	25	70	33.33
AFX50122-100A	10	10	9.70	15	30	75	49.46
AFX50122-100B	10	10	9.70	15	45	100	61.12
AFX50122-120A	12	12	11.70	20	35	80	67.75
AFX50122-120B	12	12	11.70	20	50	110	97.46

HC = Carbide coated



P	●
M	○
K	●
N	
S	
H	●

- Main application
- Secondary application



AFX50321-...

2 flutes, long design

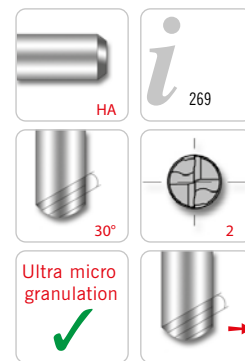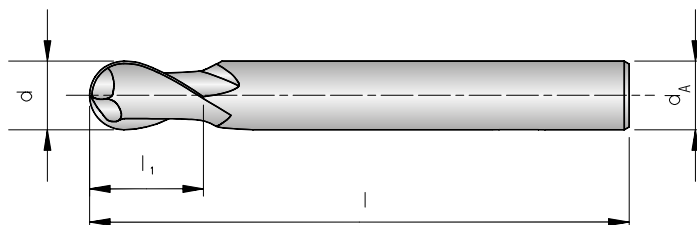

Shank DIN 6535HA	d -0,012	d _A h6	l ₁	l	R ±0,005	PG 24 / Price in £ HC
						£100
AFX50321-001A	0.1	4	0.2	40	0.05	49.46
AFX50321-002A	0.2	4	0.4	40	0.10	38.39
AFX50321-003A	0.3	4	0.6	40	0.15	32.25
AFX50321-004A	0.4	4	0.8	40	0.20	27.07
AFX50321-005A	0.5	4	1.0	40	0.25	25.15
AFX50321-006A	0.6	4	1.2	40	0.30	25.15
AFX50321-007A	0.7	4	1.4	40	0.35	23.82
AFX50321-008A	0.8	4	1.6	40	0.40	22.14
AFX50321-009A	0.9	4	1.8	40	0.45	22.14
AFX50321-010A	1.0	4	2.5	50	0.50	21.79
AFX50321-010B	1.0	6	2.5	50	0.50	23.10
AFX50321-010C	1.0	6	2.5	70	0.50	27.07
AFX50321-012A	1.2	6	3.0	50	0.60	23.10
AFX50321-015A	1.5	4	4.0	50	0.75	21.79
AFX50321-015B	1.5	6	4.0	50	0.75	23.10
AFX50321-015C	1.5	6	4.0	70	0.75	27.07
AFX50321-020A	2.0	4	5.0	50	1.00	21.79
AFX50321-020B	2.0	6	3.0	40	1.00	22.49
AFX50321-020C	2.0	6	5.0	50	1.00	22.49
AFX50321-020D	2.0	6	5.0	80	1.00	25.39
AFX50321-025A	2.5	6	6.0	60	1.25	22.49
AFX50321-025B	2.5	6	6.0	80	1.25	25.39
AFX50321-030A	3.0	4	6.0	60	1.50	21.79
AFX50321-030B	3.0	6	4.5	40	1.50	22.49
AFX50321-030C	3.0	6	6.0	60	1.50	22.49
AFX50321-030D	3.0	6	6.0	80	1.50	25.39
AFX50321-030E	3.0	6	6.0	100	1.50	33.10
AFX50321-040A	4.0	4	8.0	70	2.00	22.49
AFX50321-040B	4.0	4	8.0	100	2.00	29.48
AFX50321-040C	4.0	6	6.0	50	2.00	22.49
AFX50321-040D	4.0	6	8.0	70	2.00	23.70
AFX50321-040E	4.0	6	8.0	100	2.00	33.10

AFX



Shank DIN 6535HA	d -0,012	d _A h6	l ₁	l	R ±0,005	PG 24 / Price in £ HC
						\$100
AFX50321-040F	4.0	6	8.0	120	2.00	34.54
AFX50321-045	4.5	6	9.0	80	2.25	25.39
AFX50321-050A	5.0	6	7.5	60	2.50	22.49
AFX50321-050B	5.0	6	10.0	80	2.50	25.39

HC = Carbide coated

P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application

Shank DIN 6535HA	d -0,012	d _A h6	l ₁	l	R ±0,005	PG 24 / Price in £ HC
						\$100
AFX50321-060	6	6	9	50	3.0	22.49
AFX50321-060A	6	6	9	60	3.0	22.49
AFX50321-060B	6	6	9	80	3.0	25.39
AFX50321-060C	6	6	12	90	3.0	33.10
AFX50321-060D	6	6	12	130	3.0	36.82
AFX50321-060E	6	6	12	150	3.0	41.76
AFX50321-070A	7	8	14	90	3.5	39.95
AFX50321-080A	8	8	12	50	4.0	32.84
AFX50321-080B	8	8	12	60	4.0	32.84
AFX50321-080C	8	8	12	80	4.0	39.95
AFX50321-080D	8	8	12	90	4.0	39.95
AFX50321-080E	8	8	14	100	4.0	39.95
AFX50321-080F	8	8	14	150	4.0	57.04
AFX50321-090	9	10	18	100	4.5	64.01
AFX50321-100A	10	10	15	60	5.0	51.02
AFX50321-100B	10	10	15	90	5.0	64.01
AFX50321-100C	10	10	18	100	5.0	64.01
AFX50321-100D	10	10	18	130	5.0	85.19
AFX50321-100E	10	10	18	150	5.0	95.66
AFX50321-100F	10	10	18	180	5.0	105.29
AFX50321-110	11	12	20	100	5.5	78.58
AFX50321-120A	12	12	18	80	6.0	78.58
AFX50321-120B	12	12	18	100	6.0	78.58
AFX50321-120C	12	12	22	110	6.0	86.04
AFX50321-120D	12	12	22	130	6.0	93.48
AFX50321-120E	12	12	22	150	6.0	106.13
AFX50321-120F	12	12	22	200	6.0	137.41
AFX50321-130A	13	12	24	100	6.5	94.09
AFX50321-140A	14	14	26	100	7.0	94.09
AFX50321-160A	16	16	24	100	8.0	114.67
AFX50321-160B	16	16	30	150	8.0	146.07
AFX50321-200A	20	20	30	100	10.0	179.53
AFX50321-200B	20	20	38	150	10.0	225.38

HC = Carbide coated



P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application



AFX52021-...

2 flutes, long design (Slotting)

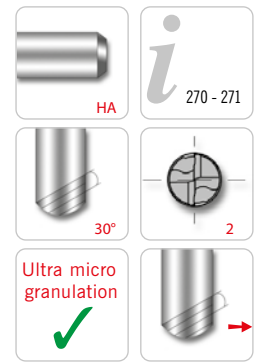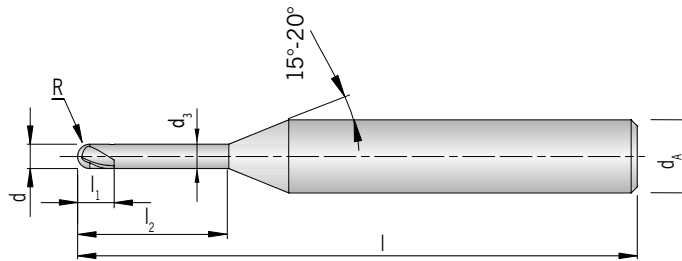

Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,005	PG 24 / Price in £ HC
								\$100
AFX52021-002A	0.2	4	0.17	0.2	0.5	40	0.10	54.02
AFX52021-002B	0.2	4	0.17	0.2	1.0	40	0.10	54.02
AFX52021-002C	0.2	4	0.17	0.2	1.5	40	0.10	54.02
AFX52021-002D	0.2	4	0.17	0.2	3.0	40	0.10	62.09
AFX52021-003A	0.3	4	0.27	0.3	1.0	40	0.15	45.61
AFX52021-003B	0.3	4	0.27	0.3	1.5	40	0.15	45.61
AFX52021-003C	0.3	4	0.27	0.3	2.0	40	0.15	45.61
AFX52021-003D	0.3	4	0.27	0.3	3.0	40	0.15	45.61
AFX52021-004A	0.4	4	0.37	0.4	1.0	40	0.20	34.05
AFX52021-004B	0.4	4	0.37	0.4	1.5	40	0.20	34.05
AFX52021-004C	0.4	4	0.37	0.4	2.0	40	0.20	39.10
AFX52021-004D	0.4	4	0.37	0.4	3.0	40	0.20	39.10
AFX52021-004E	0.4	4	0.37	0.4	4.0	40	0.20	39.10
AFX52021-004F	0.4	4	0.37	0.4	5.0	40	0.20	39.10
AFX52021-004G	0.4	4	0.37	0.4	6.0	40	0.20	45.01
AFX52021-005A	0.5	4	0.45	0.5	1.0	45	0.25	34.41
AFX52021-005B	0.5	4	0.45	0.5	2.0	45	0.25	34.41
AFX52021-005C	0.5	4	0.45	0.5	3.0	45	0.25	34.41
AFX52021-005D	0.5	4	0.45	0.5	4.0	45	0.25	34.41
AFX52021-005E	0.5	4	0.45	0.5	5.0	45	0.25	34.41
AFX52021-005F	0.5	4	0.45	0.5	6.0	45	0.25	39.47
AFX52021-005G	0.5	4	0.45	0.5	8.0	45	0.25	39.47
AFX52021-005H	0.5	4	0.45	0.5	10.0	45	0.25	51.27
AFX52021-006A	0.6	4	0.55	0.6	1.0	45	0.30	34.41
AFX52021-006B	0.6	4	0.55	0.6	2.0	45	0.30	34.41
AFX52021-006C	0.6	4	0.55	0.6	3.0	45	0.30	34.41
AFX52021-006D	0.6	4	0.55	0.6	4.0	45	0.30	34.41
AFX52021-006E	0.6	4	0.55	0.6	5.0	45	0.30	34.41
AFX52021-006F	0.6	4	0.55	0.6	6.0	45	0.30	34.41
AFX52021-006G	0.6	4	0.55	0.6	8.0	45	0.30	39.47
AFX52021-006H	0.6	4	0.55	0.6	10.0	45	0.30	51.27
AFX52021-006I	0.6	4	0.55	0.6	12.0	45	0.30	54.52
AFX52021-007A	0.7	4	0.65	0.7	6.0	45	0.35	34.41
AFX52021-008A	0.8	4	0.75	0.8	2.0	45	0.40	26.95
AFX52021-008B	0.8	4	0.75	0.8	3.0	45	0.40	26.95
AFX52021-008C	0.8	4	0.75	0.8	4.0	45	0.40	26.95
AFX52021-008D	0.8	4	0.75	0.8	5.0	45	0.40	26.95
AFX52021-008E	0.8	4	0.75	0.8	6.0	45	0.40	26.95
AFX52021-008F	0.8	4	0.75	0.8	8.0	45	0.40	26.95
AFX52021-008G	0.8	4	0.75	0.8	10.0	45	0.40	34.77



Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,005	PG 24 / Price in £ HC
								100
AFX52021-010A	1.0	6	0.95	1.0	5.0	50	0.50	30.08
AFX52021-010B	1.0	6	0.95	1.0	6.0	50	0.50	30.08
AFX52021-010C	1.0	6	0.95	1.0	8.0	50	0.50	30.08
AFX52021-020A	2.0	6	1.95	2.0	8.0	50	1.00	28.64
AFX52021-020B	2.0	6	1.95	2.0	10.0	50	1.00	28.64
AFX52021-030A	3.0	6	2.85	3.0	8.0	50	1.50	28.64
AFX52021-030B	3.0	6	2.85	3.0	10.0	50	1.50	28.64
AFX52021-030C	3.0	6	2.85	3.0	12.0	50	1.50	28.64
AFX52021-030D	3.0	6	2.85	3.0	14.0	60	1.50	34.54
AFX52021-030E	3.0	6	2.85	3.0	16.0	60	1.50	34.54
AFX52021-030F	3.0	6	2.85	3.0	18.0	60	1.50	36.94
AFX52021-030G	3.0	6	2.85	3.0	20.0	60	1.50	36.94
AFX52021-030H	3.0	6	2.85	3.0	26.0	65	1.50	37.18
AFX52021-030I	3.0	6	2.85	3.0	30.0	70	1.50	40.07
AFX52021-030J	3.0	6	2.85	3.0	35.0	70	1.50	43.68
AFX52021-040A	4.0	6	3.85	4.0	10.0	50	2.00	28.64
AFX52021-040B	4.0	6	3.85	4.0	12.0	50	2.00	28.64
AFX52021-040C	4.0	6	3.85	4.0	14.0	60	2.00	34.54
AFX52021-040D	4.0	6	3.85	4.0	16.0	60	2.00	34.54
AFX52021-040E	4.0	6	3.85	4.0	18.0	60	2.00	36.94
AFX52021-040F	4.0	6	3.85	4.0	20.0	60	2.00	36.94
AFX52021-040G	4.0	6	3.85	4.0	26.0	65	2.00	37.18
AFX52021-040H	4.0	6	3.85	4.0	30.0	70	2.00	40.07
AFX52021-040I	4.0	6	3.85	4.0	35.0	70	2.00	43.68
AFX52021-040J	4.0	6	3.85	4.0	40.0	80	2.00	49.70
AFX52021-050A	5.0	6	4.85	6.0	30.0	70	2.50	40.07

HC = Carbide coated

P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application

Shank DIN 6535HA	d -0,012	d _A h6	d ₃	l ₁	l ₂	l	R ±0,005	PG 24 / Price in £ HC
								100
AFX52021-060A	6	6	5.85	8	20	60	3	36.94
AFX52021-060B	6	6	5.85	8	30	60	3	36.94
AFX52021-080A	8	8	7.70	10	25	70	4	46.57
AFX52021-080B	8	8	7.70	14	35	100	4	51.27
AFX52021-100A	10	10	9.70	12	30	75	5	71.59
AFX52021-100B	10	10	9.70	18	30	100	5	77.98
AFX52021-100C	10	10	9.70	18	40	100	5	77.98
AFX52021-120A	12	12	11.70	14	32	80	6	84.84
AFX52021-120B	12	12	11.70	22	32	110	6	102.52

HC = Carbide coated



P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application



AFX50140-...

4 flutes

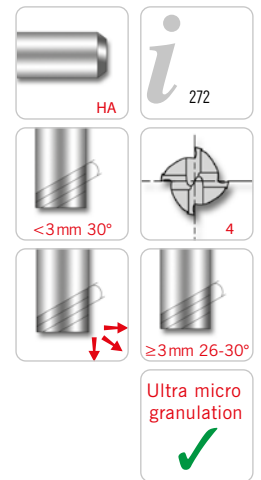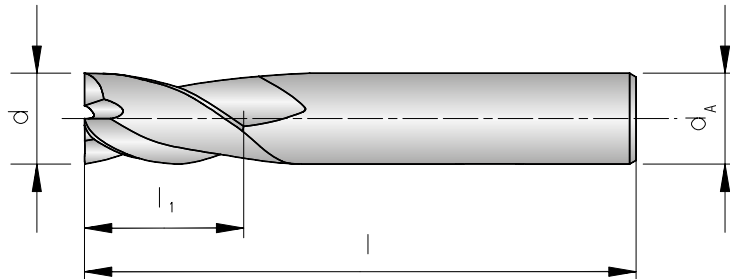

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					€100
AFX50140-010	1.0	6	2.5	50	23.82
AFX50140-015	1.5	6	4.0	50	23.82
AFX50140-020	2.0	6	6.0	50	21.79
AFX50140-025	2.5	6	7.0	50	21.79
AFX50140-030	3.0	6	8.0	50	21.79
AFX50140-035	3.5	6	10.0	50	21.79
AFX50140-040	4.0	6	10.0	50	21.79
AFX50140-045	4.5	6	14.0	50	21.79
AFX50140-050	5.0	6	15.0	60	21.79
AFX50140-055	5.5	6	15.0	60	21.79
AFX50140-060	6.0	6	15.0	60	21.79
AFX50140-065	6.5	8	18.0	60	27.07
AFX50140-070	7.0	8	20.0	60	27.07
AFX50140-075	7.5	8	20.0	60	27.07
AFX50140-080	8.0	8	20.0	70	27.07
AFX50140-085	8.5	10	22.0	70	40.19
AFX50140-090	9.0	10	22.0	70	40.19
AFX50140-095	9.5	10	24.0	70	40.19
AFX50140-100	10.0	10	25.0	75	40.19
AFX50140-105	10.5	12	26.0	75	55.11
AFX50140-110	11.0	12	30.0	75	55.11
AFX50140-115	11.5	12	30.0	80	55.11
AFX50140-120	12.0	12	30.0	80	55.11
AFX50140-130	13.0	12	35.0	100	73.16
AFX50140-140	14.0	14	35.0	100	73.16
AFX50140-160	16.0	16	40.0	100	95.55
AFX50140-180	18.0	18	45.0	100	127.06
AFX50140-200	20.0	20	45.0	100	158.47
AFX50140-250	25.0	25	50.0	120	264.11

HC = Carbide coated



P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application



AFX50041-...R...

4 flutes, long design, with corner radius

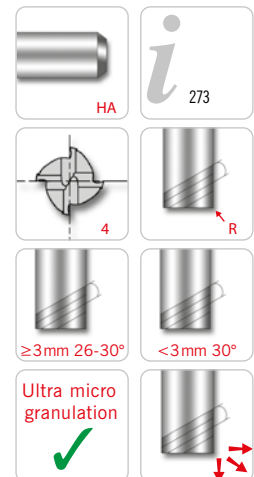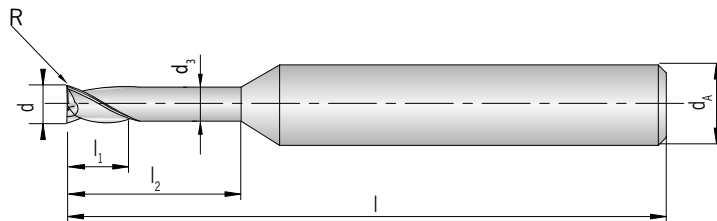

Shank DIN 6535HA	d -0,03	d _A h6	d ₃	l ₁	l ₂	l	R ± 0,02	PG 24 / Price in £ HC
								£100
AFX50041-010AR0,1	1.0	4	0.95	1.5	4	50	0.1	24.54
AFX50041-010AR0,2	1.0	4	0.95	1.5	4	50	0.2	24.54
AFX50041-010AR0,3	1.0	4	0.95	1.5	4	50	0.3	24.54
AFX50041-010BR0,1	1.0	4	0.95	1.5	6	50	0.1	24.54
AFX50041-010BR0,2	1.0	4	0.95	1.5	6	50	0.2	24.54
AFX50041-010BR0,3	1.0	4	0.95	1.5	6	50	0.3	24.54
AFX50041-010CR0,1	1.0	4	0.95	1.5	8	50	0.1	24.54
AFX50041-010CR0,2	1.0	4	0.95	1.5	8	50	0.2	24.54
AFX50041-010CR0,3	1.0	4	0.95	1.5	8	50	0.3	24.54
AFX50041-012AR0,1	1.2	4	1.15	1.8	4	50	0.1	24.54
AFX50041-012AR0,2	1.2	4	1.15	1.8	4	50	0.2	24.54
AFX50041-012AR0,3	1.2	4	1.15	1.8	4	50	0.3	24.54
AFX50041-012BR0,1	1.2	4	1.15	1.8	6	50	0.1	24.54
AFX50041-012BR0,2	1.2	4	1.15	1.8	6	50	0.2	24.54
AFX50041-012BR0,3	1.2	4	1.15	1.8	6	50	0.3	24.54
AFX50041-012CR0,1	1.2	4	1.15	1.8	8	50	0.1	24.54
AFX50041-012CR0,2	1.2	4	1.15	1.8	8	50	0.2	24.54
AFX50041-012CR0,3	1.2	4	1.15	1.8	8	50	0.3	24.54
AFX50041-015AR0,1	1.5	4	1.45	2.3	6	50	0.1	24.54
AFX50041-015AR0,2	1.5	4	1.45	2.3	6	50	0.2	24.54
AFX50041-015AR0,3	1.5	4	1.45	2.3	6	50	0.3	24.54
AFX50041-015AR0,5	1.5	4	1.45	2.3	6	50	0.5	24.54
AFX50041-015BR0,1	1.5	4	1.45	2.3	8	50	0.1	24.54
AFX50041-015BR0,2	1.5	4	1.45	2.3	8	50	0.2	24.54
AFX50041-015BR0,3	1.5	4	1.45	2.3	8	50	0.3	24.54
AFX50041-015BR0,5	1.5	4	1.45	2.3	8	50	0.5	24.54
AFX50041-015CR0,1	1.5	4	1.45	2.3	10	50	0.1	24.54
AFX50041-015CR0,2	1.5	4	1.45	2.3	10	50	0.2	24.54
AFX50041-015CR0,3	1.5	4	1.45	2.3	10	50	0.3	24.54
AFX50041-015CR0,5	1.5	4	1.45	2.3	10	50	0.5	24.54
AFX50041-015DR0,1	1.5	4	1.45	2.3	12	50	0.1	25.87
AFX50041-015DR0,2	1.5	4	1.45	2.3	12	50	0.2	25.87
AFX50041-015DR0,3	1.5	4	1.45	2.3	12	50	0.3	25.87
AFX50041-015DR0,5	1.5	4	1.45	2.3	12	50	0.5	25.87
AFX50041-020AR0,1	2.0	4	1.95	3.0	6	50	0.1	23.33
AFX50041-020AR0,2	2.0	4	1.95	3.0	6	50	0.2	23.33



Shank DIN 6535HA	d -0,03	d _A h6	d ₃	l ₁	l ₂	l	R ± 0,02	PG 24 / Price in £ HC
								\$100
AFX50041-020AR0,3	2.0	4	1.95	3.0	6	50	0.3	23.33
AFX50041-020AR0,5	2.0	4	1.95	3.0	6	50	0.5	23.33
AFX50041-020BR0,1	2.0	4	1.95	3.0	8	50	0.1	23.33
AFX50041-020BR0,2	2.0	4	1.95	3.0	8	50	0.2	23.33
AFX50041-020BR0,3	2.0	4	1.95	3.0	8	50	0.3	23.33
AFX50041-020BR0,5	2.0	4	1.95	3.0	8	50	0.5	23.33
AFX50041-020CR0,1	2.0	4	1.95	3.0	10	50	0.1	23.33
AFX50041-020CR0,2	2.0	4	1.95	3.0	10	50	0.2	23.33
AFX50041-020CR0,3	2.0	4	1.95	3.0	10	50	0.3	23.33
AFX50041-020CR0,5	2.0	4	1.95	3.0	10	50	0.5	23.33
AFX50041-020DR0,1	2.0	4	1.95	3.0	12	50	0.1	23.33
AFX50041-020DR0,2	2.0	4	1.95	3.0	12	50	0.2	23.33
AFX50041-020DR0,3	2.0	4	1.95	3.0	12	50	0.3	23.33
AFX50041-020DR0,5	2.0	4	1.95	3.0	12	50	0.5	23.33
AFX50041-030AR0,1	3.0	6	2.85	4.5	8	50	0.1	35.01
AFX50041-030AR0,2	3.0	6	2.85	4.5	10	50	0.2	35.01
AFX50041-030AR0,3	3.0	6	2.85	4.5	8	50	0.3	35.01
AFX50041-030AR0,5	3.0	6	2.85	4.5	8	60	0.5	35.01
AFX50041-030AR1,0	3.0	6	2.85	4.5	8	50	1.0	35.01
AFX50041-030BR0,1	3.0	6	2.85	4.5	10	50	0.1	35.01
AFX50041-030BR0,2	3.0	6	2.85	4.5	12	60	0.2	35.01
AFX50041-030BR0,3	3.0	6	2.85	4.5	10	60	0.3	35.01
AFX50041-030BR0,5	3.0	6	2.85	4.5	10	50	0.5	35.01
AFX50041-030BR1,0	3.0	6	2.85	4.5	10	50	1.0	35.01
AFX50041-030CR0,1	3.0	6	2.85	4.5	12	50	0.1	35.01
AFX50041-030CR0,2	3.0	6	2.85	4.5	16	60	0.2	35.38
AFX50041-030CR0,3	3.0	6	2.85	4.5	12	50	0.3	35.01
AFX50041-030CR0,5	3.0	6	2.85	4.5	12	50	0.5	35.01
AFX50041-030CR1,0	3.0	6	2.85	4.5	12	50	1.0	35.01
AFX50041-030DR0,1	3.0	6	2.85	4.5	16	60	0.1	35.38
AFX50041-030DR0,2	3.0	6	2.85	4.5	20	60	0.2	35.38
AFX50041-030DR0,3	3.0	6	2.85	4.5	16	60	0.3	35.38
AFX50041-030DR0,5	3.0	6	2.85	4.5	16	60	0.5	35.38
AFX50041-030DR1,0	3.0	6	2.85	4.5	16	60	1.0	35.38
AFX50041-030ER0,3	3.0	6	2.85	4.5	20	60	0.3	35.38
AFX50041-030ER0,5	3.0	6	2.85	4.5	20	60	0.5	35.38
AFX50041-030FR0,5	3.0	6	2.85	4.5	26	65	0.5	35.38
AFX50041-040AR0,1	4.0	6	3.85	6.0	10	50	0.1	36.34
AFX50041-040AR0,2	4.0	6	3.85	6.0	10	50	0.2	36.34
AFX50041-040AR0,3	4.0	6	3.85	6.0	10	50	0.3	36.34
AFX50041-040AR0,5	4.0	6	3.85	6.0	10	50	0.5	36.34
AFX50041-040AR1,0	4.0	6	3.85	6.0	10	50	1.0	36.34
AFX50041-040BR0,1	4.0	6	3.85	6.0	12	50	0.1	36.34
AFX50041-040BR0,2	4.0	6	3.85	6.0	12	50	0.2	36.34
AFX50041-040BR0,3	4.0	6	3.85	6.0	12	50	0.3	36.34
AFX50041-040BR0,5	4.0	6	3.85	6.0	12	50	0.5	36.34
AFX50041-040BR1,0	4.0	6	3.85	6.0	12	50	1.0	36.34
AFX50041-040CR0,1	4.0	6	3.85	6.0	16	60	0.1	36.70
AFX50041-040CR0,2	4.0	6	3.85	6.0	16	60	0.2	36.70
AFX50041-040CR0,3	4.0	6	3.85	6.0	16	60	0.3	36.70
AFX50041-040CR0,5	4.0	6	3.85	6.0	16	60	0.5	36.70
AFX50041-040CR1,0	4.0	6	3.85	6.0	16	60	1.0	36.70
AFX50041-040DR0,1	4.0	6	3.85	6.0	20	60	0.1	36.70
AFX50041-040DR0,2	4.0	6	3.85	6.0	20	60	0.2	36.70
AFX50041-040DR0,3	4.0	6	3.85	6.0	20	60	0.3	36.70
AFX50041-040DR0,5	4.0	6	3.85	6.0	20	60	0.5	36.70
AFX50041-040DR1,0	4.0	6	3.85	6.0	20	60	1.0	36.70
AFX50041-040ER0,2	4.0	6	3.85	6.0	26	65	0.2	36.70

AFX



Shank DIN 6535HA	d -0,03	d _A h6	d ₃	l ₁	l ₂	l	R ± 0,02	PG 24 / Price in £ HC
								\$100
AFX50041-040ER0,3	4.0	6	3.85	6.0	26	65	0.3	36.70
AFX50041-040ER0,5	4.0	6	3.85	6.0	26	65	0.5	36.70
AFX50041-040ER1,0	4.0	6	3.85	6.0	26	65	1.0	36.70
AFX50041-060AR0,3	6.0	6	5.85	9.0	20	60	0.3	35.25
AFX50041-060AR0,5	6.0	6	5.85	9.0	20	60	0.5	35.25
AFX50041-060AR1,0	6.0	6	5.85	9.0	20	60	1.0	35.25
AFX50041-080AR0,2	8.0	8	7.70	12.0	25	70	0.2	44.04
AFX50041-080AR0,3	8.0	8	7.70	12.0	25	70	0.3	44.04
AFX50041-080AR0,5	8.0	8	7.70	12.0	25	70	0.5	44.04
AFX50041-080AR1,0	8.0	8	7.70	12.0	25	70	1.0	44.04
AFX50041-080BR0,5	8.0	8	7.70	20.0	35	100	0.5	54.76
AFX50041-100AR0,3	10.0	10	9.70	15.0	30	75	0.3	59.31
AFX50041-100AR0,5	10.0	10	9.70	15.0	30	75	0.5	59.31
AFX50041-100AR1,0	10.0	10	9.70	15.0	30	75	1.0	59.31
AFX50041-100AR1,5	10.0	10	9.70	15.0	30	75	1.5	63.41
AFX50041-100BR0,5	10.0	10	9.70	25.0	40	100	0.5	73.41
AFX50041-120AR0,5	12.0	12	11.70	18.0	32	80	0.5	81.10
AFX50041-120AR1,0	12.0	12	11.70	18.0	32	80	1.0	81.10
AFX50041-120AR1,5	12.0	12	11.70	18.0	32	80	1.5	86.76
AFX50041-120AR2,0	12.0	12	11.70	18.0	32	80	2.0	86.76
AFX50041-120BR0,5	12.0	12	11.70	30.0	45	110	0.5	107.45
AFX50041-160AR0,5	16.0	16	15.70	20.0	35	100	0.5	140.66
AFX50041-160AR1,0	16.0	16	15.70	20.0	35	100	1.0	140.66
AFX50041-200AR0,5	20.0	20	19.70	25.0	40	100	0.5	233.44
AFX50041-200AR1,0	20.0	20	19.70	25.0	40	100	1.0	233.44

HC = Carbide coated



P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application



AFX50741-...R...

4 flutes, long design, with corner radius

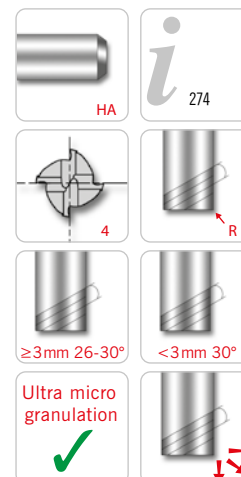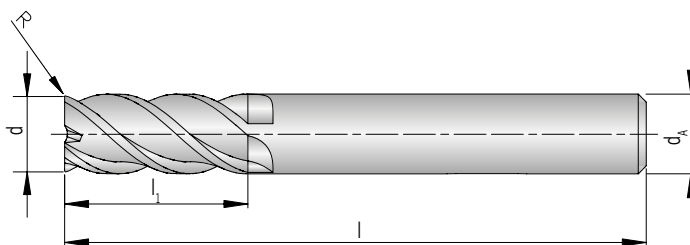

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	R ± 0,02	PG 24 / Price in £ HC
						£100
AFX50741-010R0,1	1.0	6	2.5	50	0.1	31.52
AFX50741-015R0,2	1.5	6	4.0	50	0.2	31.52
AFX50741-020R0,1	2.0	6	6.0	50	0.1	28.75
AFX50741-020R0,2	2.0	6	6.0	50	0.2	28.75
AFX50741-025R0,2	2.5	6	7.0	60	0.2	28.75
AFX50741-030R0,2	3.0	6	8.0	60	0.2	28.75
AFX50741-030R0,3	3.0	6	8.0	60	0.3	28.75
AFX50741-030R0,5	3.0	6	8.0	60	0.5	28.75
AFX50741-040R0,2	4.0	6	10.0	70	0.2	29.84
AFX50741-040R0,3	4.0	6	10.0	70	0.3	29.84
AFX50741-040R0,5	4.0	6	10.0	70	0.5	29.84
AFX50741-040R1,0	4.0	6	10.0	70	1.0	29.84
AFX50741-050R0,3	5.0	6	13.0	90	0.3	31.65
AFX50741-050R0,5	5.0	6	13.0	90	0.5	31.65
AFX50741-060AR0,2	6.0	6	15.0	60	0.2	28.75
AFX50741-060BR0,2	6.0	6	15.0	90	0.2	31.65
AFX50741-060R0,3	6.0	6	15.0	90	0.3	31.65
AFX50741-060R0,5	6.0	6	15.0	90	0.5	31.65
AFX50741-060R1,0	6.0	6	15.0	90	1.0	31.65
AFX50741-080AR0,3	8.0	8	20.0	70	0.3	35.85
AFX50741-080AR0,5	8.0	8	20.0	70	0.5	35.85
AFX50741-080AR1,0	8.0	8	20.0	70	1.0	35.85
AFX50741-080BR0,3	8.0	8	20.0	100	0.3	40.42
AFX50741-080BR0,5	8.0	8	20.0	100	0.5	40.42
AFX50741-080BR1,0	8.0	8	20.0	100	1.0	40.42
AFX50741-080R0,2	8.0	8	20.0	100	0.2	40.42
AFX50741-080R1,5	8.0	8	20.0	100	1.5	43.08
AFX50741-080R2,0	8.0	8	20.0	100	2.0	43.08
AFX50741-100AR0,5	10.0	10	25.0	75	0.5	48.26
AFX50741-100BR0,5	10.0	10	25.0	100	0.5	53.42
AFX50741-100R0,3	10.0	10	25.0	100	0.3	53.42
AFX50741-100R1,0	10.0	10	25.0	100	1.0	53.42
AFX50741-100R1,5	10.0	10	25.0	100	1.5	58.23
AFX50741-100R2,0	10.0	10	25.0	100	2.0	58.23
AFX50741-120AR0,5	12.0	12	30.0	80	0.5	65.94
AFX50741-120AR1,0	12.0	12	30.0	80	1.0	65.94



Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	R ± 0,02	PG 24 / Price in £ HC
						\$100
AFX50741-120BR0,5	12.0	12	30.0	110	0.5	86.62
AFX50741-120R1,0	12.0	12	30.0	110	1.0	86.62
AFX50741-120R1,5	12.0	12	30.0	110	1.5	93.38
AFX50741-120R2,0	12.0	12	30.0	110	2.0	93.38
AFX50741-160R0,5	16.0	16	32.0	150	0.5	138.97
AFX50741-160R1,0	16.0	16	32.0	150	1.0	138.97
AFX50741-160R1,5	16.0	16	32.0	150	1.5	151.25
AFX50741-160R2,0	16.0	16	32.0	150	2.0	151.25
AFX50741-200R1,0	20.0	20	38.0	150	1.0	228.97
AFX50741-200R2,0	20.0	20	38.0	150	2.0	249.45

HC = Carbide coated



P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application



AFX50042-...

4 flutes

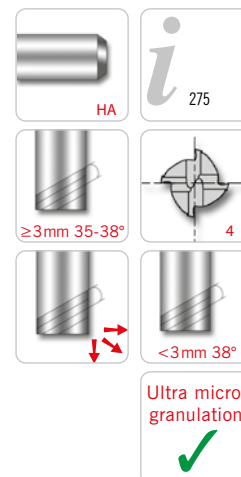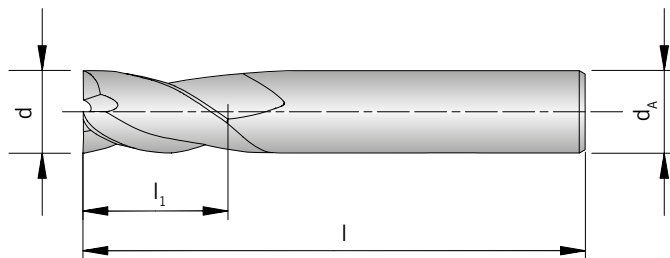

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					£100
AFX50042-010A	1.0	6	2.5	50	23.82
AFX50042-012A	1.2	6	3.0	50	23.82
AFX50042-015A	1.5	6	4.0	50	23.82
AFX50042-020A	2.0	6	6.0	50	21.79
AFX50042-025A	2.5	6	7.0	50	21.79
AFX50042-030A	3.0	6	8.0	50	21.79
AFX50042-040A	4.0	6	10.0	50	21.79
AFX50042-050A	5.0	6	15.0	60	21.79
AFX50042-060A	6.0	6	15.0	60	21.79
AFX50042-060B	6.0	6	25.0	60	29.36
AFX50042-080A	8.0	8	20.0	70	27.07
AFX50042-100A	10.0	10	25.0	75	40.19
AFX50042-120A	12.0	12	30.0	80	55.11
AFX50042-120B	12.0	12	35.0	80	59.31
AFX50042-160A	16.0	16	32.0	100	95.55
AFX50042-200A	20.0	20	45.0	100	158.47

HC = Carbide coated



P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application



AFX50141-...

4 flutes, long design

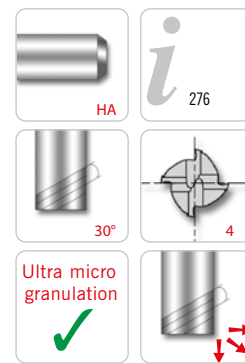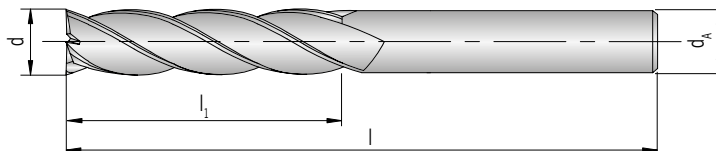

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					£100
AFX50141-010A	1.0	6	3	60	23.82
AFX50141-010B	1.0	6	4	60	23.82
AFX50141-010C	1.0	6	5	60	25.03
AFX50141-010D	1.0	6	6	60	25.03
AFX50141-015A	1.5	6	6	60	23.82
AFX50141-020A	2.0	6	8	60	21.79
AFX50141-020B	2.0	6	10	60	22.73
AFX50141-020C	2.0	6	12	60	23.94
AFX50141-020D	2.0	6	14	60	26.11
AFX50141-025A	2.5	6	10	60	21.79
AFX50141-025B	2.5	6	12	60	21.79
AFX50141-030A	3.0	6	10	70	29.36
AFX50141-030B	3.0	6	12	70	29.36
AFX50141-030C	3.0	6	16	70	29.36
AFX50141-030D	3.0	6	20	70	29.36
AFX50141-030E	3.0	6	26	70	32.97
AFX50141-030F	3.0	6	30	70	35.38
AFX50141-040A	4.0	6	12	70	29.36
AFX50141-040B	4.0	6	16	70	29.36
AFX50141-040C	4.0	6	20	70	29.36
AFX50141-040D	4.0	6	26	70	32.97
AFX50141-040E	4.0	6	30	70	35.38
AFX50141-050A	5.0	6	20	70	29.36
AFX50141-050B	5.0	6	25	70	32.97
AFX50141-050C	5.0	6	30	80	36.22
AFX50141-060A	6.0	6	15	60	21.79
AFX50141-060B	6.0	6	20	70	29.36
AFX50141-060C	6.0	6	20	90	31.65
AFX50141-060D	6.0	6	25	75	32.97
AFX50141-060E	6.0	6	30	80	35.61
AFX50141-060F	6.0	6	30	100	38.50
AFX50141-060G	6.0	6	35	90	40.19
AFX50141-060H	6.0	6	40	90	40.91
AFX50141-060I	6.0	6	40	120	45.84
AFX50141-060J	6.0	6	45	150	54.76
AFX50141-080A	8.0	8	25	80	34.54



Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					\$100
AFX50141-080B	8.0	8	30	80	34.54
AFX50141-080C	8.0	8	35	80	38.62
AFX50141-080D	8.0	8	40	90	41.26
AFX50141-080E	8.0	8	45	100	45.72
AFX50141-080F	8.0	8	50	100	46.68
AFX50141-080G	8.0	8	50	150	55.95
AFX50141-100A	10.0	10	30	80	46.33
AFX50141-100B	10.0	10	30	100	49.94
AFX50141-100C	10.0	10	35	90	48.26
AFX50141-100D	10.0	10	40	90	51.74
AFX50141-100E	10.0	10	45	100	56.06
AFX50141-100F	10.0	10	50	100	59.57
AFX50141-120A	12.0	12	35	90	66.17
AFX50141-120B	12.0	12	40	100	68.71
AFX50141-120C	12.0	12	45	130	79.78
AFX50141-120D	12.0	12	50	100	77.01
AFX50141-120E	12.0	12	55	110	82.07
AFX50141-120F	12.0	12	60	110	87.48
AFX50141-120G	12.0	12	60	150	101.31
AFX50141-140A	14.0	16	50	110	138.26
AFX50141-160B	16.0	16	50	110	123.33
AFX50141-160C	16.0	16	60	120	128.87
AFX50141-160D	16.0	16	70	130	142.34
AFX50141-160E	16.0	16	70	150	153.66
AFX50141-180A	18.0	20	50	120	179.16
AFX50141-200A	20.0	20	60	130	219.72
AFX50141-200B	20.0	20	90	200	327.40
AFX50141-250A	25.0	25	90	150	358.22

HC = Carbide coated



P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application



AFX50142-...

4 flutes, extra long design

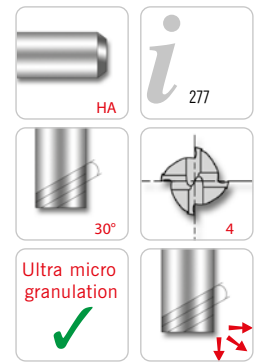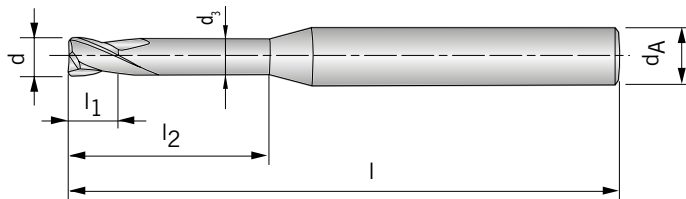

Shank DIN 6535HA	d -0,03	d _A h6	d ₃	l ₁	l ₂	l	PG 24 / Price in £ HC
							£100
AFX50142-010A	1.0	4	0.95	1.5	4	50	18.53
AFX50142-010B	1.0	4	0.95	1.5	5	50	18.53
AFX50142-010C	1.0	4	0.95	1.5	6	50	18.53
AFX50142-010D	1.0	4	0.95	1.5	8	50	18.53
AFX50142-015A	1.5	4	1.45	2.3	6	50	18.53
AFX50142-015B	1.5	4	1.45	2.3	8	50	18.53
AFX50142-015C	1.5	4	1.45	2.3	10	50	18.53
AFX50142-015D	1.5	4	1.45	2.3	12	50	19.61
AFX50142-015E	1.5	4	1.45	2.3	16	50	20.35
AFX50142-020A	2.0	4	1.95	3.0	8	50	17.68
AFX50142-020B	2.0	4	1.95	3.0	10	50	17.68
AFX50142-020C	2.0	4	1.95	3.0	12	50	17.68
AFX50142-020D	2.0	4	1.95	3.0	16	50	18.77
AFX50142-030A	3.0	6	2.85	4.5	10	50	26.47
AFX50142-030B	3.0	6	2.85	4.5	12	50	26.47
AFX50142-030C	3.0	6	2.85	4.5	16	60	26.71
AFX50142-030D	3.0	6	2.85	4.5	20	60	26.71
AFX50142-030E	3.0	6	2.85	4.5	30	70	34.17
AFX50142-040A	4.0	6	3.85	6.0	12	50	26.47
AFX50142-040B	4.0	6	3.85	6.0	16	60	26.71
AFX50142-040C	4.0	6	3.85	6.0	20	60	26.71
AFX50142-040D	4.0	6	3.85	6.0	30	70	34.17
AFX50142-040E	4.0	6	3.85	6.0	40	80	34.41
AFX50142-050A	5.0	6	4.85	8.0	20	60	26.71
AFX50142-050B	5.0	6	4.85	8.0	40	80	34.41
AFX50142-060A	6.0	6	5.85	9.0	15	60	26.71
AFX50142-060B	6.0	6	5.85	9.0	30	70	34.17
AFX50142-080A	8.0	8	7.70	12.0	25	70	33.33
AFX50142-080B	8.0	8	7.70	12.0	42	100	41.51

AFX



Shank DIN 6535HA	d -0,03	d _A h6	d ₃	l ₁	l ₂	l	PG 24 / Price in £ HC
							£100
AFX50142-100A	10.0	10	9.70	15.0	30	75	49.46
AFX50142-100B	10.0	10	9.70	15.0	45	100	61.12
AFX50142-120A	12.0	12	11.70	20.0	35	80	67.75
AFX50142-120B	12.0	12	11.70	20.0	50	110	97.46



HC = Carbide coated

P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application



AFX50260-...
6 flutes, short design

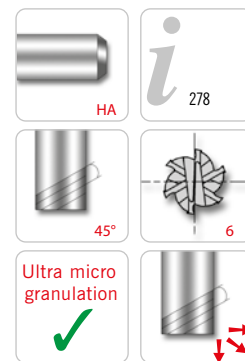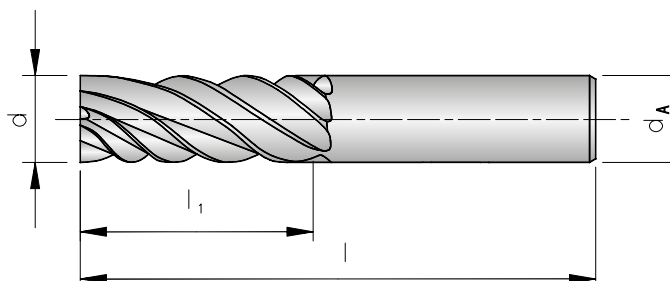

Shank DIN 6535HA	d -0,03	d _A h6	l ₁	l	PG 24 / Price in £ HC
					£100
AFX50260-060A	6	6	15	60	24.79
AFX50260-060B	6	6	30	80	40.79
AFX50260-080A	8	8	20	70	33.33
AFX50260-080B	8	8	40	90	50.78
AFX50260-100A	10	10	25	75	47.05
AFX50260-100B	10	10	40	90	60.65
AFX50260-120A	12	12	30	80	64.01
AFX50260-120B	12	12	50	100	89.40
AFX50260-120C	12	12	60	110	101.56
AFX50260-160A	16	16	40	100	112.99
AFX50260-160B	16	16	60	120	152.45
AFX50260-200A	20	20	45	100	172.90
AFX50260-200B	20	20	60	120	239.68

HC = Carbide coated


P	●
M	○
K	●
N	
S	
H	●

● Main application
○ Secondary application



Design AFX

MATERIAL	Non-alloyed steel				Alloy steel				Hardened steel			
	Alloy steel				Heat resistant steel							
	Cast iron											
Hardness Strength	~ HRC 35 ~ 1100 N/mm ²				HRC 35 ~ HRC 45 1110 ~ 1500 N/mm ²				HRC 45 ~ HRC 55 1500 ~ 2000 N/mm ²			
d	n	f _z	v _f	v _c	n	f _z	v _f	v _c	n	f _z	v _f	v _c
(mm)	(U/min)	(mm)	(mm/min)	(m/min)	(U/min)	(mm)	(mm/min)	(m/min)	(U/min)	(mm)	(mm/min)	(m/min)
1,0	27.600	0,004	240	87	18.000	0,003	100	57	11.000	0,003	60	35
1,5	22.000	0,006	250	104	13.500	0,004	110	64	8.500	0,004	60	40
2,0	18.000	0,007	260	113	11.560	0,005	120	73	7.200	0,005	70	45
3,0	13.240	0,011	280	125	8.560	0,008	140	81	5.280	0,007	70	50
4,0	10.720	0,016	340	135	6.820	0,012	170	86	4.300	0,009	80	54
5,0	9.160	0,023	420	144	5.800	0,017	200	91	3.800	0,013	100	60
6,0	7.900	0,032	500	149	5.040	0,025	250	95	3.280	0,018	120	62
8,0	6.000	0,045	540	151	3.800	0,033	250	96	2.520	0,024	120	63
10,0	5.040	0,054	540	158	3.280	0,038	250	103	2.020	0,030	120	63
12,0	4.120	0,051	420	155	2.780	0,041	230	105	1.680	0,030	100	63
16,0	3.100	0,058	360	156	2.100	0,040	170	106	1.280	0,031	80	64
20,0	2.520	0,056	280	158	1.640	0,037	120	103	1.000	0,030	60	63




The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.



Design AFX

MATERIAL		Non-alloyed steel Alloy steel Cast iron				Alloy steel Heat resistant steel				Hardened steel			
Hardness Strength		~ HRC 35 ~ 1100 N/mm ²				HRC 35 ~ HRC 45 1110 ~ 1500 N/mm ²				HRC 45 ~ HRC 55 1500 ~ 2000 N/mm ²			
d	R	n	f _z	v _f	v _c	n	f _z	v _f	v _c	n	f _z	v _f	v _c
(mm)	(mm)	(U/min)	(mm)	(mm/min)	(m/min)	(U/min)	(mm)	(mm/min)	(m/min)	(U/min)	(mm)	(mm/min)	(m/min)
0,1	0,05	40.000	0,007	550	13	40.000	0,006	500	13	33.000	0,006	400	10
0,2	0,1	30.000	0,012	720	19	30.000	0,011	630	19	27.000	0,011	575	17
0,3	0,15	30.000	0,015	900	28	30.000	0,014	810	28	27.000	0,013	720	25
0,4	0,2	30.000	0,019	1140	38	30.000	0,017	1020	38	27.000	0,017	900	34
0,5	0,25	30.000	0,024	1440	47	30.000	0,021	1260	47	27.000	0,021	1140	42
0,6	0,3	30.000	0,029	1740	57	30.000	0,025	1500	57	27.000	0,024	1320	51
0,7	0,35	30.000	0,034	2040	66	30.000	0,029	1740	66	27.000	0,029	1560	59
0,8	0,4	30.000	0,039	2340	75	30.000	0,033	1980	75	27.000	0,033	1800	68
0,9	0,45	30.000	0,044	2610	85	30.000	0,038	2250	85	27.000	0,038	2040	76
1,0	0,5	30.000	0,048	2880	94	30.000	0,042	2520	94	27.000	0,042	2280	85
1,2	0,6	30.000	0,051	3060	113	28.800	0,045	2580	109	25.800	0,045	2310	97
1,5	0,75	30.000	0,054	3240	141	28.800	0,047	2700	136	25.800	0,047	2400	122
2,0	1,0	29.820	0,057	3420	187	28.680	0,050	2880	180	24.000	0,050	2400	151
2,5	1,25	23.800	0,074	3510	187	22.900	0,066	3030	180	19.200	0,063	2400	151
3,0	1,5	19.860	0,091	3600	187	19.080	0,083	3180	180	16.000	0,075	2400	151
4,0	2,0	14.900	0,121	3600	187	14.340	0,111	3180	180	12.000	0,100	2400	151
5,0	2,5	11.160	0,156	3480	175	10.680	0,138	2940	168	9.000	0,125	2250	141
6,0	3,0	8.340	0,174	2910	157	8.040	0,153	2460	152	6.600	0,141	1860	124
7,0	3,5	7.220	0,184	2650	159	6.960	0,159	2220	153	5.800	0,147	1700	128
8,0	4,0	6.660	0,189	2520	167	6.420	0,164	2100	161	5.400	0,150	1620	136
9,0	4,5	5.940	0,195	2320	168	5.700	0,170	1940	161	4.800	0,156	1500	136
10,0	5,0	5.580	0,199	2220	175	5.340	0,174	1860	168	4.500	0,160	1440	141
11,0	5,5	4.875	0,205	1995	168	4.670	0,180	1680	161	3.930	0,164	1290	136
12,0	6,0	4.170	0,212	1770	157	4.000	0,188	1500	151	3.360	0,170	1140	127
13,0	6,5	3.960	0,218	1725	162	3.800	0,197	1500	155	3.200	0,173	1110	131
14,0	7,0	3.750	0,224	1680	165	3.600	0,208	1500	158	3.030	0,178	1080	133
16,0	8,0	3.340	0,238	1590	168	3.210	0,206	1320	161	2.700	0,189	1020	136
20,0	10,0	2.670	0,264	1410	168	2.580	0,227	1170	162	2.160	0,208	900	136

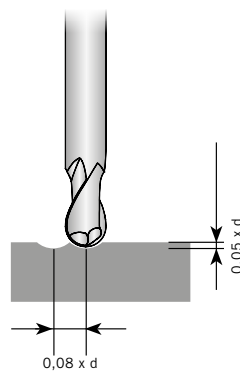


The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.



Design AFX

MATERIAL		Non-alloyed steel Alloy steel Cast iron					Alloy steel Heat resistant steel					Hardened steel				
Hardness Strength		~ HRC 35 ~ 1100 N/mm ²					HRC 35 ~ HRC 45 1110 ~ 1500 N/mm ²					HRC 45 ~ HRC 55 1500 ~ 2000 N/mm ²				
d	l ₂	a _p	n	f _z	v _f	v _c	a _p	n	f _z	v _f	v _c	a _p	n	f _z	v _f	v _c
(mm)	(mm)	(mm)	(U/min)	(mm)	(mm/min)	(m/min)	(mm)	(U/min)	(mm)	(mm/min)	(m/min)	(mm)	(U/min)	(mm)	(mm/min)	(m/min)
1,0	8,0	0,036	27.720	0,022	1245	87	0,028	26.190	0,020	1060	82	0,020	23.130	0,019	870	73
2,0	8	0,126	18.000	0,050	1795	113	0,098	17.000	0,045	1525	107	0,070	15.000	0,043	1285	94
2,0	10	0,126	18.000	0,050	1795	113	0,098	17.000	0,045	1525	107	0,070	15.000	0,043	1285	94
3,0	8	0,270	13.700	0,075	2050	129	0,210	12.900	0,067	1730	122	0,150	11.400	0,063	1435	107
3,0	10	0,189	13.700	0,075	2050	129	0,147	12.900	0,067	1730	122	0,105	11.400	0,063	1435	107
3,0	12	0,189	13.700	0,075	2050	129	0,147	12.900	0,067	1730	122	0,105	11.400	0,063	1435	107
3,0	14	0,189	13.700	0,075	2050	129	0,147	12.900	0,067	1730	122	0,105	11.400	0,063	1435	107
3,0	16	0,108	12.330	0,067	1660	116	0,084	11.610	0,060	1400	109	0,060	10.260	0,057	1160	97
3,0	18	0,108	12.330	0,067	1660	116	0,084	11.610	0,060	1400	109	0,060	10.260	0,057	1160	97
3,0	20	0,108	12.330	0,067	1660	116	0,084	11.610	0,060	1400	109	0,060	10.260	0,057	1160	97
3,0	26	0,068	12.330	0,067	1660	116	0,053	11.610	0,060	1400	109	0,038	10.260	0,057	1160	97
3,0	30	0,068	12.330	0,067	1660	116	0,053	11.610	0,060	1400	109	0,038	10.260	0,057	1160	97
3,0	35	0,068	10.960	0,060	1310	103	0,053	10.320	0,054	1105	97	0,038	9.120	0,050	920	86
4,0	10	0,360	9.800	0,100	1965	123	0,280	9.300	0,090	1670	117	0,200	8.200	0,085	1395	103
4,0	12	0,360	9.800	0,100	1965	123	0,280	9.300	0,090	1670	117	0,200	8.200	0,085	1395	103
4,0	14	0,252	9.800	0,100	1965	123	0,196	9.300	0,090	1670	117	0,140	8.200	0,085	1395	103
4,0	16	0,252	9.800	0,100	1965	123	0,196	9.300	0,090	1670	117	0,140	8.200	0,085	1395	103
4,0	18	0,252	9.800	0,100	1965	123	0,196	9.300	0,090	1670	117	0,140	8.200	0,085	1395	103
4,0	20	0,252	9.800	0,100	1965	123	0,196	9.300	0,090	1670	117	0,140	8.200	0,085	1395	103
4,0	26	0,144	8.820	0,090	1590	111	0,122	8.370	0,081	1355	105	0,080	7.380	0,077	1130	93
4,0	30	0,144	8.820	0,090	1590	111	0,122	8.370	0,081	1355	105	0,080	7.380	0,077	1130	93
4,0	35	0,090	8.820	0,090	1590	111	0,070	8.370	0,081	1355	105	0,050	7.380	0,077	1130	93
4,0	40	0,090	8.820	0,090	1590	111	0,070	8.370	0,081	1355	105	0,050	7.380	0,077	1130	93
5,0	30	0,180	6.930	0,108	1495	109	0,140	6.570	0,090	1180	103	0,100	5.760	0,090	1040	90
6,0	20	0,378	6.500	0,146	1900	123	0,294	6.200	0,129	1600	117	0,210	5.500	0,121	1330	104
6,0	30	0,378	6.500	0,146	1900	123	0,294	6.200	0,129	1600	117	0,210	5.500	0,121	1330	104
8,0	25	0,504	4.850	0,186	1800	122	0,392	4.600	0,163	1500	116	0,280	4.000	0,160	1280	101
8,0	35	0,504	4.850	0,186	1800	122	0,392	4.600	0,163	1500	116	0,280	4.000	0,160	1280	101
10,0	30	0,900	3.850	0,214	1650	121	0,700	3.680	0,190	1400	116	0,500	3.200	0,188	1200	101
10,0	40	0,630	3.850	0,214	1650	121	0,490	3.680	0,190	1400	116	0,350	3.200	0,188	1200	101
12,0	32	1,080	3.200	0,238	1520	121	0,840	3.050	0,213	1300	115	0,600	2.650	0,208	1100	100



Depth of cut in one pass


AFX

The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.



Design AFX

MATERIAL	Non-alloyed steel				Alloy steel				Hardened steel			
	Alloy steel				Heat resistant steel							
	Cast iron											
Hardness Strength	~ HRC 35 ~ 1100 N/mm ²				HRC 35 ~ HRC 45 1110 ~ 1500 N/mm ²				HRC 45 ~ HRC 55 1500 ~ 2000 N/mm ²			
d	n	f _z	V _f	V _c	n	f _z	V _f	V _c	n	f _z	V _f	V _c
(mm)	(U/min)	(mm)	(mm/min)	(m/min)	(U/min)	(mm)	(mm/min)	(m/min)	(U/min)	(mm)	(mm/min)	(m/min)
1,0	26.800	0,002	250	84	16.080	0,002	150	51	10.720	0,001	47	34
1,2	22.500	0,003	265	85	13.500	0,003	160	51	9.000	0,001	47	34
1,5	18.750	0,004	270	88	11.250	0,004	165	53	7.500	0,002	47	35
2,0	14.450	0,005	295	91	9.450	0,005	180	59	6.300	0,002	53	40
2,5	12.800	0,006	315	101	8.200	0,006	195	64	5.250	0,003	58	41
3,0	11.150	0,008	335	105	6.950	0,008	210	66	4.200	0,004	63	40
3,5	10.300	0,011	465	113	6.360	0,011	290	70	3.940	0,004	63	43
4,0	9.450	0,016	600	119	5.780	0,016	370	73	3.680	0,004	63	46
4,5	8.660	0,018	615	122	5.250	0,018	375	74	3.290	0,005	70	47
5,0	7.880	0,020	630	124	4.730	0,020	380	74	2.900	0,006	75	46
5,5	7.410	0,022	660	128	4.460	0,023	405	77	2.700	0,007	80	47
6,0	6.950	0,025	695	131	4.200	0,026	430	79	2.500	0,009	85	47
6,5	6.530	0,027	710	133	3.940	0,027	425	80	2.400	0,010	95	49
7,0	6.100	0,030	720	134	3.680	0,028	415	81	2.300	0,011	100	51
7,5	5.680	0,032	735	134	3.410	0,030	410	80	2.200	0,013	110	52
8,0	5.250	0,035	745	132	3.150	0,032	400	79	2.100	0,014	115	53
8,5	4.960	0,036	720	132	2.990	0,032	380	80	2.000	0,014	110	53
9,0	4.660	0,037	695	132	2.830	0,031	355	80	1.900	0,014	105	54
9,5	4.370	0,038	665	130	2.660	0,031	335	79	1.800	0,014	100	54
10,0	4.080	0,039	640	128	2.500	0,032	315	79	1.700	0,014	95	53
10,5	3.910	0,040	620	129	2.400	0,032	305	79	1.640	0,014	95	54
11,0	3.750	0,040	595	130	2.300	0,032	290	79	1.580	0,014	90	55
11,5	3.590	0,040	570	130	2.200	0,032	280	79	1.510	0,015	90	50
12,0	3.430	0,040	545	129	2.100	0,032	265	79	1.450	0,015	85	55
13,0	3.260	0,040	520	133	2.000	0,031	250	82	1.370	0,015	80	56
14,0	3.090	0,040	490	136	1.900	0,031	235	84	1.290	0,015	75	57
16,0	2.750	0,040	440	138	1.700	0,032	215	85	1.130	0,014	65	57
18,0	2.430	0,040	385	137	1.510	0,031	190	85	990	0,014	55	56
20,0	2.100	0,040	335	132	1.330	0,032	170	84	850	0,012	42	53
25,0	1.700	0,039	265	134	1.050	0,032	135	82	680	0,012	32	53




The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.



Design AFX

MATERIAL		Non-alloyed steel Alloy steel Cast iron					Alloy steel Heat resistant steel					Hardened steel				
Hardness Strength		~ HRc 35 ~ 1100 N/mm ²					HRc 35 ~ HRc 45 1110 ~ 1500 N/mm ²					HRc 45 ~ HRc 55 1500 ~ 2000 N/mm ²				
d	l ₂	a _e	n	f _z	v _f	v _c	a _e	n	f _z	v _f	v _c	a _e	n	f _z	v _f	v _c
(mm)	(mm)	(mm)	(U/min)	(mm)	(mm/min)	(m/min)	(mm)	(U/min)	(mm)	(mm/min)	(m/min)	(mm)	(U/min)	(mm)	(mm/min)	(m/min)
1,0	4	0,021	33.100	0,003	360	104	0,016	21.600	0,003	260	68	0,013	13.200	0,003	140	41
1,0	6	0,012	29.790	0,002	290	94	0,009	19.440	0,003	210	61	0,007	11.880	0,002	115	37
1,0	8	0,012	29.790	0,002	290	94	0,009	19.440	0,003	210	61	0,007	11.880	0,002	115	37
1,2	4	0,025	29.750	0,003	365	112	0,019	18.900	0,004	265	71	0,015	11.700	0,003	140	44
1,2	6	0,025	29.750	0,003	365	112	0,019	18.900	0,004	265	71	0,015	11.700	0,003	140	44
1,2	8	0,014	26.780	0,003	295	101	0,011	17.010	0,003	215	64	0,009	10.530	0,003	115	40
1,5	6	0,032	26.400	0,004	370	124	0,024	16.200	0,004	270	76	0,019	10.200	0,003	140	48
1,5	8	0,018	23.760	0,003	300	112	0,014	14.580	0,004	220	69	0,011	9.180	0,003	115	43
1,5	10	0,018	23.760	0,003	300	112	0,014	14.580	0,004	220	69	0,011	9.180	0,003	115	43
1,5	12	0,018	23.760	0,003	300	112	0,014	14.580	0,004	220	69	0,011	9.180	0,003	115	43
2,0	6	0,060	21.600	0,004	380	136	0,045	13.800	0,005	280	87	0,036	8.640	0,004	150	54
2,0	8	0,042	21.600	0,004	380	136	0,032	13.800	0,005	280	87	0,025	8.640	0,004	150	54
2,0	10	0,042	21.600	0,004	380	136	0,032	13.800	0,005	280	87	0,025	8.640	0,004	150	54
2,0	12	0,024	19.440	0,004	310	122	0,018	12.420	0,005	225	78	0,014	7.780	0,004	120	49
3,0	8	0,090	15.900	0,006	400	150	0,068	10.300	0,008	310	97	0,054	6.300	0,006	150	59
3,0	10	0,063	15.900	0,006	400	150	0,047	10.300	0,008	310	97	0,038	6.300	0,006	150	59
3,0	12	0,063	15.900	0,006	400	150	0,047	10.300	0,008	310	97	0,038	6.300	0,006	150	59
3,0	16	0,036	14.310	0,006	325	135	0,027	9.270	0,007	250	87	0,022	5.670	0,005	120	53
3,0	20	0,036	14.310	0,006	325	135	0,027	9.270	0,007	250	87	0,022	5.670	0,005	120	53
3,0	26	0,023	14.310	0,006	325	135	0,017	9.270	0,007	250	87	0,014	5.670	0,005	120	53
4,0	10	0,120	12.800	0,010	500	161	0,090	8.200	0,011	360	103	0,072	5.150	0,008	160	65
4,0	12	0,120	12.800	0,010	500	161	0,090	8.200	0,011	360	103	0,072	5.150	0,008	160	65
4,0	16	0,084	12.800	0,010	500	161	0,063	8.200	0,011	360	103	0,050	5.150	0,008	160	65
4,0	20	0,084	12.800	0,010	500	161	0,063	8.200	0,011	360	103	0,050	5.150	0,008	160	65
4,0	26	0,048	11.520	0,009	405	145	0,036	7.380	0,010	290	93	0,029	4.640	0,007	130	58
6,0	20	0,126	9.500	0,013	510	179	0,095	6.000	0,018	430	113	0,076	3.930	0,013	200	74
8,0	25	0,168	7.200	0,019	550	181	0,126	4.550	0,024	430	114	0,101	3.020	0,017	200	76
8,0	35	0,168	7.200	0,019	550	181	0,126	4.550	0,024	430	114	0,101	3.020	0,017	200	76
10,0	30	0,300	6.000	0,023	550	188	0,225	4.000	0,027	430	126	0,180	2.420	0,021	200	76
10,0	40	0,210	6.000	0,023	550	188	0,158	4.000	0,027	430	126	0,126	2.420	0,021	200	76
12,0	32	0,360	5.000	0,022	430	188	0,270	3.340	0,028	380	126	0,216	2.000	0,020	160	75
12,0	45	0,252	5.000	0,022	430	188	0,189	3.340	0,028	380	126	0,151	2.000	0,020	160	75
16,0	35	0,480	3.720	0,022	330	187	0,360	2.520	0,028	280	127	0,288	1.540	0,022	135	77
20,0	40	0,600	3.000	0,023	270	188	0,450	1.950	0,027	210	123	0,360	1.200	0,021	100	75





AFX

The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.



Design AFX

MATERIAL	Non-alloyed steel Alloy steel Cast iron				Alloy steel Heat resistant steel				Hardened steel			
	~ HRC 35 ~ 1100 N/mm ²				HRC 35 ~ HRC 45 1110 ~ 1500 N/mm ²				HRC 45 ~ HRC 55 1500 ~ 2000 N/mm ²			
	d (mm)	n (U/min)	f _z (mm)	v _f (mm/min)	v _c (m/min)	n (U/min)	f _z (mm)	v _f (mm/min)	v _c (m/min)	n (U/min)	f _z (mm)	v _f (mm/min)
1,0	27.600	0,003	300	87	18.000	0,003	220	57	11.000	0,003	120	35
1,5	22.000	0,004	310	104	13.500	0,004	230	64	8.500	0,004	120	40
2,0	18.000	0,004	320	113	11.560	0,005	240	73	7.200	0,005	130	45
2,5	15.000	0,006	330	118	9.500	0,007	250	75	6.100	0,005	130	48
3,0	13.240	0,006	340	125	8.560	0,008	260	81	5.280	0,006	130	50
4,0	10.720	0,010	420	135	6.820	0,011	300	86	4.300	0,008	140	54
5,0	9.160	0,012	430	144	5.800	0,016	360	91	3.800	0,011	170	60
6,0	7.900	0,014	430	149	5.040	0,018	360	95	3.280	0,013	170	62
8,0	6.000	0,019	460	151	3.800	0,024	360	96	2.520	0,017	170	63
10,0	5.040	0,023	460	158	3.280	0,027	360	103	2.020	0,021	170	63
12,0	4.120	0,022	360	155	2.780	0,029	320	105	1.680	0,021	140	63
16,0	3.100	0,023	280	156	2.100	0,027	230	106	1.280	0,022	115	64
20,0	2.520	0,023	230	158	1.640	0,027	180	103	1.000	0,023	90	63




The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.



Design AFX

MATERIAL	Non-alloyed steel Alloy steel Cast iron				Alloy steel Heat resistant steel				Hardened steel			
	~ HRC 35 ~ 1100 N/mm ²				HRC 35 ~ HRC 45 1110 ~ 1500 N/mm ²				HRC 45 ~ HRC 55 1500 ~ 2000 N/mm ²			
Hardness Strength	n	f _z	V _f	V _c	n	f _z	V _f	V _c	n	f _z	V _f	V _c
d (mm)	(U/min)	(mm)	(mm/min)	(m/min)	(U/min)	(mm)	(mm/min)	(m/min)	(U/min)	(mm)	(mm/min)	(m/min)
1,0	26.800	0,002	250	84	16.080	0,002	150	51	10.720	0,001	47	34
1,2	22.500	0,003	265	85	13.500	0,003	160	51	9.000	0,001	47	34
1,5	18.750	0,004	270	88	11.250	0,004	165	53	7.500	0,002	47	35
2,0	14.450	0,005	295	91	9.450	0,005	180	59	6.300	0,002	53	40
2,5	12.800	0,006	315	101	8.200	0,006	195	64	5.250	0,003	58	41
3,0	11.150	0,008	335	105	6.950	0,008	210	66	4.200	0,004	63	40
3,5	10.300	0,011	465	113	6.360	0,011	290	70	3.940	0,004	63	43
4,0	9.450	0,016	600	119	5.780	0,016	370	73	3.680	0,004	63	46
4,5	8.660	0,018	615	122	5.250	0,018	375	74	3.290	0,005	70	47
5,0	7.880	0,020	630	124	4.730	0,020	380	74	2.900	0,006	75	46
5,5	7.410	0,022	660	128	4.460	0,023	405	77	2.700	0,007	80	47
6,0	6.950	0,025	695	131	4.200	0,026	430	79	2.500	0,009	85	47
6,5	6.530	0,027	710	133	3.940	0,027	425	80	2.400	0,010	95	49
7,0	6.100	0,030	720	134	3.680	0,028	415	81	2.300	0,011	100	51
7,5	5.680	0,032	735	134	3.410	0,030	410	80	2.200	0,013	110	52
8,0	5.250	0,035	745	132	3.150	0,032	400	79	2.100	0,014	115	53
8,5	4.960	0,036	720	132	2.990	0,032	380	80	2.000	0,014	110	53
9,0	4.660	0,037	695	132	2.830	0,031	355	80	1.900	0,014	105	54
9,5	4.370	0,038	665	130	2.660	0,031	335	79	1.800	0,014	100	54
10,0	4.080	0,039	640	128	2.500	0,032	315	79	1.700	0,014	95	53
10,5	3.910	0,040	620	129	2.400	0,032	305	79	1.640	0,014	95	54
11,0	3.750	0,040	595	130	2.300	0,032	290	79	1.580	0,014	90	55
11,5	3.590	0,040	570	130	2.200	0,032	280	79	1.510	0,015	90	50
12,0	3.430	0,040	545	129	2.100	0,032	265	79	1.450	0,015	85	55
13,0	3.260	0,040	520	133	2.000	0,031	250	82	1.370	0,015	80	56
14,0	3.090	0,040	490	136	1.900	0,031	235	84	1.290	0,015	75	57
16,0	2.750	0,040	440	138	1.700	0,032	215	85	1.130	0,014	65	57
18,0	2.430	0,040	385	137	1.510	0,031	190	85	990	0,014	55	56
20,0	2.100	0,040	335	132	1.330	0,032	170	84	850	0,012	42	53
25,0	1.700	0,039	265	134	1.050	0,032	135	82	680	0,012	32	53





The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.



Design AFX

MATERIAL		Non-alloyed steel Alloy steel Cast iron				Alloy steel Heat resistant steel				Hardened steel			
Hardness Strength		~ HRC 35 ~ 1100 N/mm ²				HRC 35 ~ HRC 45 1110 ~ 1500 N/mm ²				HRC 45 ~ HRC 55 1500 ~ 2000 N/mm ²			
d	l ₁	n	f _z	v _f	v _c	n	f _z	v _f	v _c	n	f _z	v _f	v _c
(mm)	(mm)	(U/min)	(mm)	(mm/min)	(m/min)	(U/min)	(mm)	(mm/min)	(m/min)	(U/min)	(mm)	(mm/min)	(m/min)
1,0	3	19.200	0,002	180	60	10.940	0,002	70	34	6.720	0,001	35	21
1,0	4	19.200	0,002	180	60	10.940	0,002	70	34	6.720	0,001	35	21
1,0	5	19.200	0,002	180	60	10.940	0,002	70	34	6.720	0,001	35	21
1,0	6	17.280	0,002	145	54	9.850	0,002	60	31	6.050	0,001	30	19
1,5	6	13.800	0,004	215	65	7.870	0,003	85	37	4.830	0,002	45	23
2,0	8	10.580	0,006	240	66	6.050	0,004	95	38	3.780	0,004	55	24
2,0	10	10.580	0,006	240	66	6.050	0,004	95	38	3.780	0,004	55	24
2,0	12	9.530	0,005	195	60	5.440	0,004	80	34	3.400	0,003	45	21
2,0	14	9.530	0,005	195	60	5.440	0,004	80	34	3.400	0,003	45	21
2,5	10	8.990	0,007	260	71	5.170	0,005	110	41	3.210	0,005	60	25
2,5	12	8.990	0,007	260	71	5.170	0,005	110	41	3.210	0,005	60	25
3,0	10	7.400	0,009	275	70	4.280	0,007	120	40	2.640	0,006	65	25
3,0	12	7.400	0,009	275	70	4.280	0,007	120	40	2.640	0,006	65	25
3,0	16	6.660	0,009	250	63	3.860	0,007	110	36	2.380	0,006	60	22
3,0	20	6.660	0,008	225	63	3.860	0,006	95	36	2.380	0,006	55	22
3,0	26	6.660	0,008	200	63	3.860	0,006	85	36	2.380	0,005	50	22
3,0	30	6.660	0,008	200	63	3.860	0,006	85	36	2.380	0,005	50	22
4,0	12	6.000	0,014	335	75	3.410	0,010	140	43	2.150	0,008	70	27
4,0	16	6.000	0,014	335	75	3.410	0,010	140	43	2.150	0,008	70	27
4,0	20	6.000	0,014	335	75	3.410	0,010	140	43	2.150	0,008	70	27
4,0	26	5.400	0,013	270	68	3.070	0,009	110	39	1.930	0,008	60	24
4,0	30	5.400	0,013	270	68	3.070	0,009	110	39	1.930	0,008	60	24
5,0	20	5.120	0,021	430	80	2.900	0,015	170	46	1.900	0,011	85	30
5,0	25	5.120	0,021	430	80	2.900	0,015	170	46	1.900	0,011	85	30
5,0	30	4.610	0,019	350	72	2.610	0,013	135	41	1.710	0,010	70	27
6,0	15	4.420	0,029	515	83	2.520	0,021	215	48	1.640	0,017	110	31
6,0	20	4.420	0,029	515	83	2.520	0,021	215	48	1.640	0,017	110	31
6,0	25	4.420	0,029	515	83	2.520	0,021	215	48	1.640	0,017	110	31
6,0	30	4.420	0,025	440	83	2.520	0,018	185	48	1.640	0,014	90	31
6,0	35	3.970	0,025	395	75	2.270	0,018	165	43	1.480	0,014	85	28
6,0	40	3.970	0,022	350	75	2.270	0,016	145	43	1.480	0,013	75	28
6,0	45	3.970	0,022	350	75	2.270	0,016	145	43	1.480	0,013	75	28
8,0	25	3.360	0,041	550	84	1.900	0,028	215	48	1.260	0,022	110	32
8,0	30	3.360	0,041	550	84	1.900	0,028	215	48	1.260	0,022	110	32
8,0	35	3.360	0,041	550	84	1.900	0,028	215	48	1.260	0,022	110	32
8,0	40	3.360	0,035	470	84	1.900	0,024	185	48	1.260	0,018	90	32
8,0	45	3.020	0,035	420	76	1.710	0,024	165	43	1.130	0,019	85	28
8,0	50	3.020	0,031	375	76	1.710	0,021	145	43	1.130	0,017	75	28
10,0	30	2.820	0,049	550	59	1.640	0,033	215	52	1.010	0,027	110	32
10,0	35	2.820	0,049	550	59	1.640	0,033	215	52	1.010	0,027	110	32
10,0	40	2.820	0,049	550	59	1.640	0,033	215	52	1.010	0,027	110	32
10,0	45	2.820	0,042	470	89	1.640	0,028	185	52	1.010	0,022	90	32
10,0	50	2.820	0,042	470	89	1.640	0,028	185	52	1.010	0,022	90	32
12,0	35	2.300	0,047	430	87	1.390	0,034	190	52	840	0,025	85	32
12,0	40	2.300	0,047	430	87	1.390	0,034	190	52	840	0,025	85	32
12,0	45	2.300	0,040	365	87	1.390	0,030	165	52	840	0,021	70	32
12,0	50	2.300	0,040	365	87	1.390	0,030	165	52	840	0,021	70	32
12,0	55	2.300	0,040	365	87	1.390	0,030	165	52	840	0,021	70	32
12,0	60	2.300	0,035	325	87	1.390	0,026	145	52	840	0,019	65	32
14,0	50	2.120	0,041	345	93	1.230	0,029	145	54	760	0,021	68	33
16,0	50	1.940	0,050	385	98	1.070	0,035	150	54	670	0,026	70	34
16,0	60	1.940	0,042	325	98	1.070	0,030	130	54	670	0,022	60	34
16,0	70	1.940	0,042	325	98	1.070	0,030	130	54	670	0,022	60	34
18,0	50	1.680	0,049	330	95	940	0,035	130	53	590	0,028	65	33
20,0	60	1.420	0,048	275	89	820	0,034	110	52	500	0,028	55	31
20,0	90	1.420	0,036	205	89	820	0,024	80	52	500	0,020	40	31
25,0	90	1.100	0,042	185	86	820	0,027	90	64	500	0,023	45	39

AFX




The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.



Design AFX

MATERIAL		Non-alloyed steel Alloy steel Cast iron					Alloy steel Heat resistant steel					Hardened steel				
Hardness Strength		~ HRC 35 ~ 1100 N/mm ²					HRC 35 ~ HRC 45 1110 ~ 1500 N/mm ²					HRC 45 ~ HRC 55 1500 ~ 2000 N/mm ²				
d	l ₂	a _e	n	f _z	v _f	v _c	a _e	n	f _z	v _f	v _c	a _e	n	f _z	v _f	v _c
(mm)	(mm)	(mm)	(U/min)	(mm)	(mm/min)	(m/min)	(mm)	(U/min)	(mm)	(mm/min)	(m/min)	(mm)	(U/min)	(mm)	(mm/min)	(m/min)
1,0	4	0,015	22.000	0,004	310	69	0,011	13.500	0,003	180	42	0,009	8.500	0,001	50	27
1,0	5	0,015	22.000	0,004	310	69	0,011	13.500	0,003	180	42	0,009	8.500	0,001	50	27
1,0	6	0,008	19.800	0,003	250	62	0,006	12.150	0,003	145	38	0,005	7.650	0,001	40	24
1,0	8	0,008	19.800	0,003	250	62	0,006	12.150	0,003	145	38	0,005	7.650	0,001	40	24
1,5	6	0,022	17.000	0,005	320	80	0,017	10.700	0,004	190	50	0,013	6.500	0,002	50	31
1,5	8	0,013	15.300	0,004	260	72	0,009	9.630	0,004	155	45	0,008	5.850	0,002	40	28
1,5	10	0,013	15.300	0,004	260	72	0,009	9.630	0,004	155	45	0,008	5.850	0,002	40	28
1,5	12	0,013	15.300	0,004	260	72	0,009	9.630	0,004	155	45	0,008	5.850	0,002	40	28
1,5	16	0,008	13.600	0,004	205	64	0,006	8.560	0,004	120	40	0,005	5.200	0,001	30	25
2,0	8	0,029	13.900	0,006	330	87	0,022	9.070	0,006	200	57	0,018	6.000	0,003	60	38
2,0	10	0,029	13.900	0,006	330	87	0,022	9.070	0,006	200	57	0,018	6.000	0,003	60	38
2,0	12	0,017	12.510	0,005	265	79	0,013	8.160	0,005	160	51	0,010	5.400	0,002	50	34
2,0	16	0,017	12.510	0,005	265	79	0,013	8.160	0,005	160	51	0,010	5.400	0,002	50	34
3,0	10	0,044	10.700	0,009	380	101	0,033	6.670	0,009	240	63	0,026	4.030	0,004	70	38
3,0	12	0,044	10.700	0,009	380	101	0,033	6.670	0,009	240	63	0,026	4.030	0,004	70	38
3,0	16	0,025	9.630	0,008	310	91	0,019	6.000	0,008	195	57	0,015	3.630	0,004	55	34
3,0	20	0,025	9.630	0,008	310	91	0,019	6.000	0,008	195	57	0,015	3.630	0,004	55	34
3,0	30	0,016	9.630	0,008	310	91	0,012	6.000	0,008	198	57	0,009	3.630	0,004	55	34
4,0	12	0,084	9.070	0,019	680	114	0,063	5.540	0,019	420	70	0,050	3.530	0,005	70	44
4,0	16	0,059	9.070	0,019	680	114	0,044	5.540	0,019	420	70	0,035	3.530	0,005	70	44
4,0	20	0,059	9.070	0,019	680	114	0,044	5.540	0,019	420	70	0,035	3.530	0,005	70	44
4,0	30	0,034	8.160	0,017	550	103	0,025	4.990	0,017	340	63	0,020	3.180	0,004	55	40
4,0	40	0,021	8.160	0,017	550	103	0,016	4.990	0,017	340	63	0,013	3.180	0,004	55	40
5,0	20	0,074	7.560	0,024	720	119	0,055	5.430	0,024	430	71	0,044	2.780	0,008	85	44
5,0	40	0,042	6.800	0,022	585	107	0,032	4.080	0,021	350	64	0,025	2.500	0,007	70	39
6,0	15	0,126	6.670	0,030	790	126	0,095	4.030	0,030	490	76	0,076	2.400	0,010	95	45
6,0	30	0,088	6.670	0,030	790	126	0,066	4.030	0,030	490	76	0,053	2.400	0,010	95	45
8,0	25	0,118	5.040	0,042	850	127	0,088	3.020	0,037	450	76	0,071	2.010	0,016	130	51
8,0	42	0,067	4.540	0,038	690	114	0,050	2.720	0,034	365	68	0,040	1.810	0,015	105	45
10,0	30	0,210	3.910	0,047	730	123	0,158	2.400	0,038	360	75	0,126	1.630	0,016	105	51
10,0	45	0,147	3.910	0,047	730	123	0,110	2.400	0,038	360	75	0,088	1.630	0,016	105	51
12,0	35	0,252	3.300	0,047	620	124	0,189	2.010	0,037	300	76	0,151	1.400	0,017	95	53
12,0	50	0,176	3.300	0,047	620	124	0,132	2.010	0,037	300	76	0,106	1.400	0,017	95	53



AFX




The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.



Design AFX



Normal speed

MATERIAL		Non-alloyed steel Alloy steel Cast iron				Alloy steel Heat resistant steel				Hardened steel			
Hardness Strength		~ HRC 35 ~ 1100 N/mm ²				HRC 35 ~ HRC 45 1110 ~ 1500 N/mm ²				HRC 45 ~ HRC 55 1500 ~ 2000 N/mm ²			
d ₁ (mm)	l ₁ (mm)	n (U/min)	f _z (mm)	v _f (mm/min)	v _c (m/min)	n (U/min)	f _z (mm)	v _f (mm/min)	v _c (m/min)	n (U/min)	f _z (mm)	v _f (mm/min)	v _c (m/min)
6,0	15	5.840	0,060	2.100	110	4.075	0,059	1.440	77	1.660	0,022	220	31
6,0	30	5.840	0,051	1.785	110	4.075	0,050	1.225	77	1.660	0,019	190	31
8,0	20	4.410	0,079	2.100	111	3.085	0,078	1.440	78	1.220	0,030	220	31
8,0	40	4.410	0,067	1.785	111	3.085	0,066	1.225	78	1.220	0,026	190	31
10,0	25	3.530	0,099	2.100	111	2.435	0,099	1.440	76	1.050	0,035	220	33
10,0	40	3.530	0,099	2.100	111	2.435	0,099	1.440	76	1.050	0,035	220	33
12,0	30	2.980	0,099	1.765	112	2.100	0,097	1.220	79	880	0,036	190	33
12,0	50	2.980	0,084	1.500	112	2.100	0,082	1.035	79	880	0,031	165	33
12,0	60	2.980	0,074	1.325	112	2.100	0,073	915	79	880	0,027	140	33
16,0	40	2.205	0,100	1.325	111	1.555	0,099	925	78	670	0,034	135	34
16,0	60	2.205	0,085	1.125	111	1.555	0,085	790	78	670	0,029	115	34
20,0	45	1.765	0,100	1.060	111	1.220	0,099	725	77	525	0,037	115	33
20,0	60	1.765	0,100	1.060	111	1.220	0,099	725	77	525	0,037	115	33



High speed

MATERIAL		Alloy steel Heat resistant steel				Hardened steel			
Hardness Strength		HRC 35 ~ HRC 45 1110 ~ 1500 N/mm ²				HRC 45 ~ HRC 55 1500 ~ 2000 N/mm ²			
d ₁ (mm)	l ₁ (mm)	n (U/min)	f _z (mm)	v _f (mm/min)	v _c (m/min)	n (U/min)	f _z (mm)	v _f (mm/min)	v _c (m/min)
6,0	15	17.640	0,060	6.395	333	8.820	0,061	3.205	166
6,0	30	17.640	0,051	5.435	333	8.820	0,051	2.720	166
8,0	20	13.230	0,081	6.395	333	6.615	0,081	3.205	166
8,0	40	13.230	0,068	5.435	333	6.615	0,069	2.725	166
10,0	25	10.480	0,100	6.290	329	5.290	0,101	3.205	166
10,0	40	10.480	0,100	6.290	329	5.290	0,101	3.205	166
12,0	30	8.820	0,100	5.290	333	4.410	0,100	2.645	166
12,0	50	8.820	0,085	4.500	333	4.410	0,085	2.245	166
12,0	60	8.820	0,075	3.970	333	4.410	0,075	1.985	166
16,0	40	6.615	0,100	3.970	333	3.320	0,100	1.985	167
16,0	60	6.615	0,085	3.375	333	3.320	0,085	1.685	137
20,0	45	5.290	0,101	3.205	332	2.645	0,097	1.545	166
20,0	60	5.290	0,101	3.205	332	2.645	0,097	1.545	166



The recommended cutting data are only approximate values. It may be necessary to adjust them to each individual machining application.

For further information please ask for our complete catalogue.

**Tool systems for parting and grooving, turning and threading,
milling and thread milling, drilling and for swiss type machining.**

ARNO (UK) Limited |
Unit 9, 10 & 11, Sugnall Business Centre
Sugnall, Eccleshall
Staffordshire
ST21 6NF

Tel.: +44 01785 850 072
Fax: +44 01785 850 076
sales@arno.de
www.arno-tools.co.uk

Karl-Heinz Arnold GmbH
Karlsbader Str. 4 | D-73760 Ostfildern
Tel.: +49 (0)711 34 802 0 | Fax: +49 (0)711 34 802 130
bestellung@arno.de | anfrage@arno.de | www.arno.de

ARNO Italia S.r.l | Via J. F. Kennedy 19 | 20871 Vimercate (MB)
Tel.: +39 039 68 52 101
info@arno-italia.it | www.arno-italia.it

ARNO-Werkzeuge USA LLC | 1101 W. Diggins St.
US-60033 Harvard, Illinois
Tel.: +1 815 943 4426 | Fax: +1 815 943 7156
info@arnousa.com | www.arnousa.com

ARNO RU Ltd. | Krassnaja Ul. 38 | RU-600015 Vladimir
Tel.: / Fax: +7 4922 541125 | COT +7 4922 541135
info@arnoru.ru | www.arnoru.ru

ARNO Werkzeuge S.E.A. PTE. LTD. | 25 International Business
Park | #04 – 70A German Center | SG-609916 Singapore
Tel.: +65 65130779 | Fax: +65 68970042
info@arno.com.sg | www.arno.com.sg

AIF Cluses | 310 Rue des îles | 74300 CLUSES
Tél.: 00 33 (0)4 50 18 24 07 | Fax: 00 33 (0)4 50 89 04 81
cluses@aif.fr

AIF - Ateliers de l'Île-de-France | 6 rue des Entrepreneurs
CS30572 | 77272 VILLEPARISIS Cedex
Tél.: 00 33 (0)1 64 27 03 30 | Fax : 00 33 (0)1 64 27 03 49
info@aif.fr | www.aif.fr